

TERMINAL BLOCK Connector

Strip Series

KLS2-3A-4MM-H(U,V) Series

Material



Base: Flat-bottom

Housing material: PE, UL94V-2

Terminal material: Brass

Working temperature: -40°C~+105°C

Poles available: 2-12 Poles

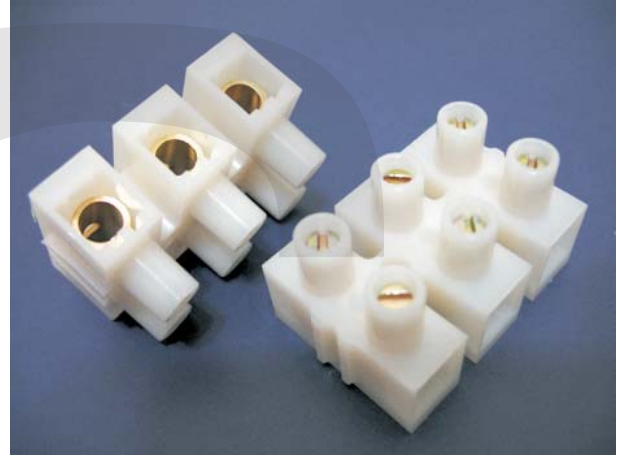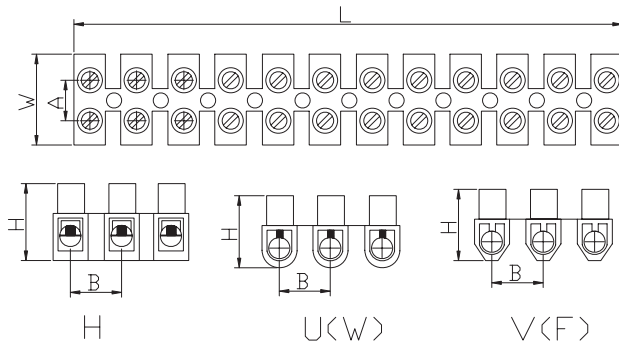

Model	wire range (mm)	Amp	Volt	PCS/Ctn	G.w.	L	W	H	A	B	Ctn Size
KLS2-3A-4	4	3A	400V	1000	19	93	16	12	6	8	41.5*21*24.5
KLS2-6A-6	6	6A	400V	1000	24	115	15.7	13	6.5	9.5	42*25*28
KLS2-10A-10	10	10A	400V	500	18	126	20.2	15.5	8.4	10.5	39*28*24
KLS2-15A-12	12	16A	400V	500	26	139	23	17.7	10.3	12	43*30*27
KLS2-20A-14	14	20A	400V	500	27	155	25	19.2	11.5	13.5	43*30*27
KLS2-30A-16	16	30A	400V	300	25	171	26	20.5	12	14.5	54*28*22.5
KLS2-60A-25	25	60A	400V	200	24	192	30	26	13.5	16.5	41*32.5*21
KLS2-80A-30	30	80A	400V	100	16	205	33	27	15	17	55*21*28
KLS2-100A-40	40	100A	400V	50	18	250	46	31	22	21	54*25*20

ORDER INFORMATION

Product NO.: KLS2-XXA-4-H-XX

Pos. NO.

Pin Number
Molded shape
See Drawing

TERMINAL BLOCK Connector



KLSelectronic
www.cnkls.com

Strip Series

KLS2-610-H1.2 Series

Material

Base: With 1.2mm elevated base
Housing material: PA66, UL94V-2
Terminal material: Cladded copper strips, Zn plated
Screws: Steel
Working temperature: -40°C ~ +105°C
Poles available: 2-12 Poles

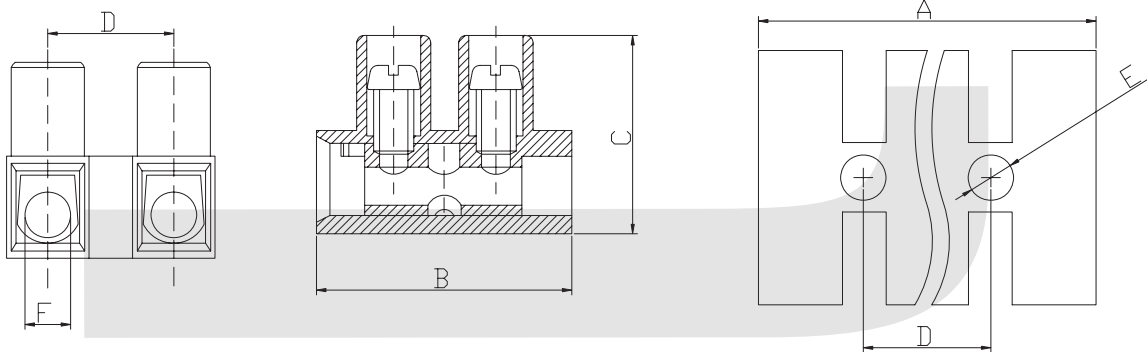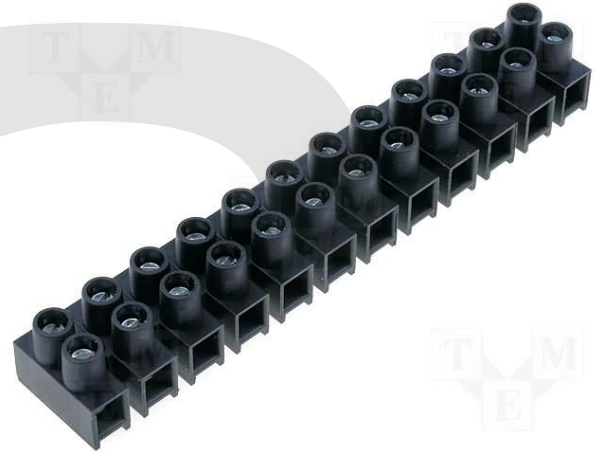

Model	MM ²	Amp	Volt	Screw	Dimensions(mm / in.)						
					Unit	A	B	C	D	E	F
KLS2-610-H1.2	1.5	17.5A	450V	M2.6x5	MM	96.0	17.8	15.5	8.2	3.0	2.8
KLS2-620-H1.2	2.5	24A	450V	M3.0x6	MM	116.5	20.0	16.7	10.0	3.5	3.3
KLS2-630-H1.2	6.5	41A	750V	M3.5x7	MM	140.7	23.8	19.0	12.0	3.9	3.9
KLS2-640-H1.2	10.0	57A	750V	M4x9	MM	158.0	25.6	25.2	13.5	4.4	4.8
KLS2-650-H1.2	16.0	76A	750V	M4x9	MM	169.8	28.0	23.0	14.5	4.2	6.0
KLS2-660-H1.2	25.0	101A	750V	M5x11	MM	194.4	36.9	28.7	16.5	4.2	7.5

ORDER INFORMATION

Product NO.: KLS2-610-H1.2-XX-W

Pos. NO. _____ Color W=White B=Black
See Drawing _____ Pin Number

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information

TERMINAL BLOCK Connector



KLSelectronic
www.cnkls.com

Strip Series

KLS2-610-H4.3 Series

Material

Base: With 4.3mm elevated base
Housing material: PA66, UL94V-2
Terminal material: Cladded copper strips, Zn plated
Screws: Steel
Working temperature: -40°C ~ +105°C
Poles available: 2-12 Poles

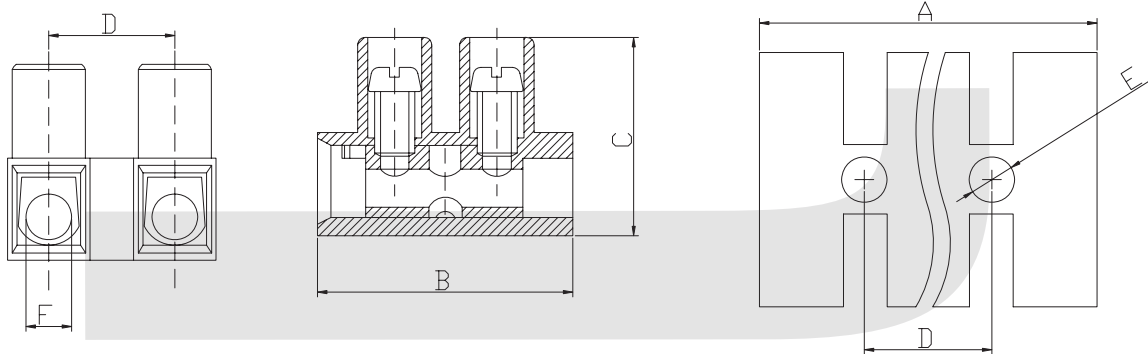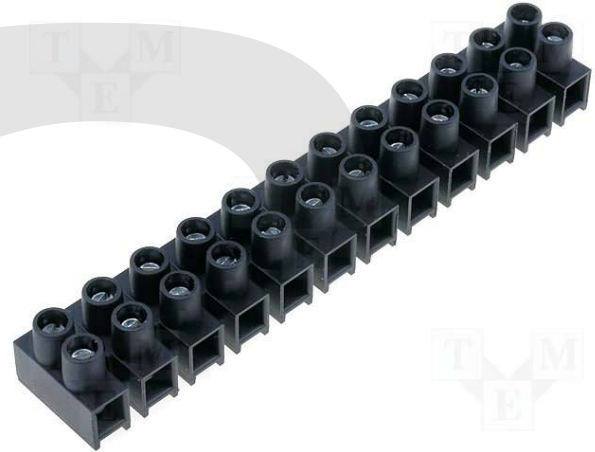

Model	MM ²	Amp	Volt	Screw	Dimensions(mm / in.)						
					Unit	A	B	C	D	E	F
KLS2-610-H4.3	1.5	17.5A	450V	M2.6x5	MM	96.0	17.8	15.5	8.2	3.0	2.8
KLS2-620-H4.3	2.5	24A	450V	M3.0x6	MM	116.5	20.0	16.7	10.0	3.5	3.3
KLS2-630-H4.3	6.5	41A	750V	M3.5x7	MM	140.7	23.8	19.0	12.0	3.9	3.9
KLS2-640-H4.3	10.0	57A	750V	M4x9	MM	158.0	25.6	25.2	13.5	4.4	4.8
KLS2-650-H4.3	16.0	76A	750V	M4x9	MM	169.8	28.0	23.0	14.5	4.2	6.0
KLS2-660-H4.3	25.0	101A	750V	M5x11	MM	194.4	36.9	28.7	16.5	4.2	7.5

ORDER INFORMATION

Product NO.: KLS2-610-H4.3-XX-W

Pos. NO. _____ Color W=White B=Black
See Drawing _____ Pin Number

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information

TERMINAL BLOCK Connector

KLSelectronic
www.cnkls.com

Strip Series

KLS2-FT011 Series

Material

Base: Flat-bottom





Housing material: PA66, UL94V-2

Terminal material: Brass

Screws: Steel

Working temperature: -40 °C ~ +105 °C

Poles available: 2-12 Poles



Model	Wire (mm ²)	Amp	Volt	Screw	Dimensions(mm / in.)						
					Unit	A	B	C	D	E	F
8HP-0	1.5	17.5A	450V	M2.6x5	MM	96.0	17.8	14.3	8.2	3.0	2.80
10HP-0	2.5	24A	450V	M3.0x6	MM	116.5	20.0	15.5	10.0	3.5	3.3
12HP-0	6.0	41A	750V	M3.5x7	MM	140.7	23.8	17.8	12.0	3.9	3.9
14HP-0	10.0	57A	750V	M4.0x9	MM	158.0	25.6	24.0	13.5	4.4	4.8
16HP-0	16.0	76A	750V	M4.0x9	MM	169.8	28.0	21.8	14.5	4.2	6.0
18HP-0	25.0	101A	750V	M5x11	MM	194.4	36.9	27.5	16.5	4.2	7.5

ORDER INFORMATION

Product NO.: KLS2-FT011-8HP-0-XX

Pos. NO. _____

Pin Number _____

Series No. _____

See Drawing _____

TERMINAL BLOCK Connector




KLSelectronic
www.cnkls.com

Strip Series

KLS2-FT013 Series

Material

Housing material: PC, UL94V-2
Terminal material: Brass
Working temperature: 85°C
Poles available: 2-12 Poles

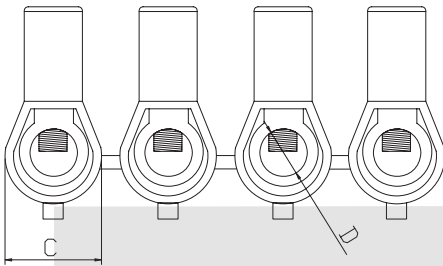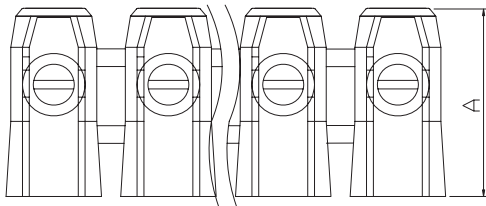

Model	Wire (mm²)	Amp	Volt	Screw	Dimensions(mm / in.)				
					Unit	A	B	C	D
1.5V	1.5	17.5A	450V	M2.5	MM	15.0	16.0	7.0	3.3
2.5V	2.5	24A	450V	M3.0	MM	20.0	18.0	7.5	4.0
4V	4	32A	450V	M3.5	MM	22.0	19.0	9.0	4.5
6V	6	41A	450V	M4.0	MM	25.0	22.0	10.0	6.0
10V	10	57A	500V	M4.0	MM	29.0	25.0	12.0	7.7
16V	16	76A	500V	M4.5	MM	35.0	31.0	16.5	9.5
25V	25	101A	500V	M5.5	MM	38.0	40.0	20.0	12.0
35V	35	125A	500V	M6	MM	46.0	43.0	21.0	14.0

ORDER INFORMATION

Product NO.: KLS2-FT013-1.5V-XX

Pos. NO. _____ Pin Number _____
Series No. _____ See Drawing _____

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information