

Connector

KLS electronic
www.cnkls.com

I.D.C Socket Series

KLS1-204D I.D.C SOCKET 1.27*2.54mm

Electrical Characteristics:





Current Rating: 1AMP
Insulator Resistance: 1000M Ohm min. at DC 500V
Contact Resistance: 30m Ohm max. at DC 100mA
Operating Temperature: -45°C~+105°C

Material:



Housing: 30% Glass filled PBT UL94V-0
Contacts: Brass or Phosphor Bronze
Plating: Selective gold plated: gold plated on mating area
and nickel plated on wire Cutting area
Gold plated: 3u" over 50u" nickel
Cable: 0.635mm (0.050") pitch flat cable

Features:

- * Optional polarizing key, polarizing bump.
- * Optional strain relief.

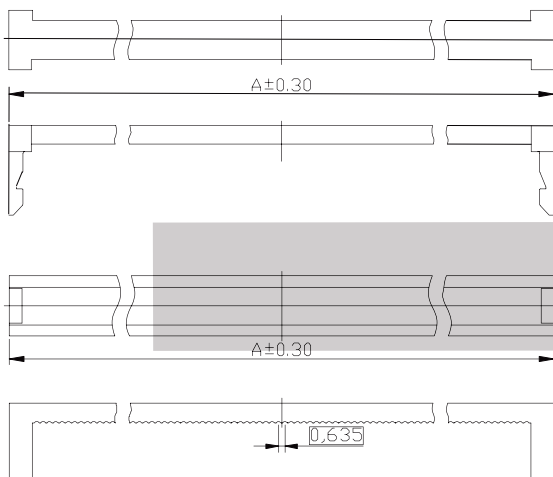

Number of Position	DIMENSIONS		
	A	B	C
10	11.25	8.35	5.08
14	13.79	10.89	7.62
16	15.06	12.16	8.89
20	17.60	14.70	11.43
22	18.87	15.97	12.70
26	21.41	18.51	15.24
30	23.95	21.05	17.78
34	26.49	23.59	20.32
40	30.30	27.40	24.13
44	32.84	29.94	26.67
50	36.65	33.75	30.48
60	43.00	40.10	36.83
68	48.08	45.18	41.91
80	55.70	52.80	49.53
100	68.40	65.50	62.23

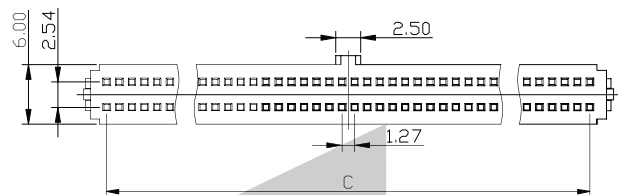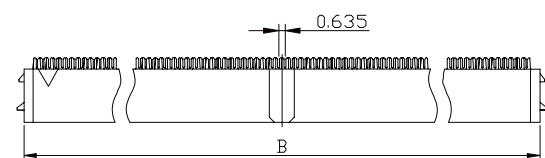

ORDER INFORMATION

Product NO.: KLS1-204D-XX-B

Pos. NO.

Insulator Color: B=Black G=Gray L=Blue

I.D.C SOCKET 1.27*2.54mm Series

Number of Contacts: XX=10-100Pin

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information