

Connector

KLS electronic
www.cnkls.com

Female Header Series

KLS1-208 Female Header 2.54mm(0.100") / High 8.4mm

Electrical Characteristics:




Current Rating: 1 AMP
Insulator Resistance: 5000MΩmin. at DC 500V
Contact Resistance: 20mΩmax. at DC 100mA
Operating Temperature: -45°C~+105°C

Material:

Housing: 30% Glass filled PBT UL94V-0
Contacts: Brass or Phosphor Bronze
Plating: Selective gold plated : gold plated on mating area and nickel plated on wire Cutting area
Gold plated: 0.8u" over 50u" nickel

Features:

- * Available in straight and right angle.
- * Turning fork contacts offer lower cost for competitive market.

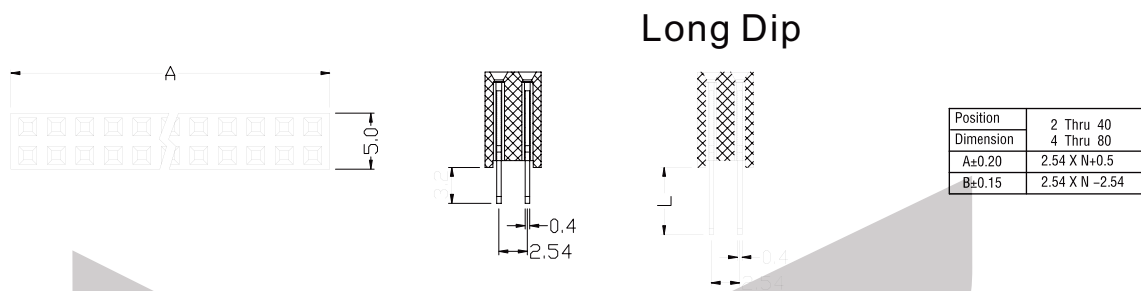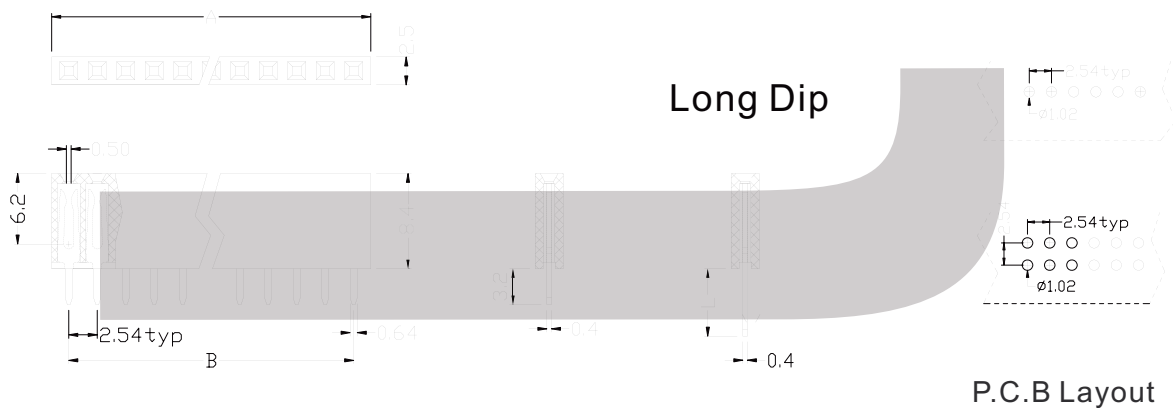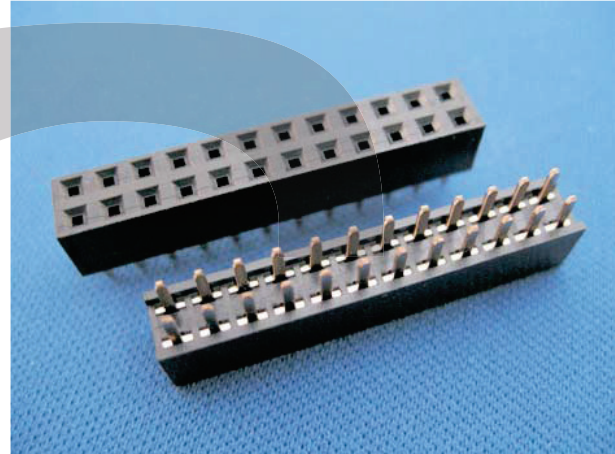

ORDER INFORMATION

Product NO.: KLS1-208-1-XX-S

Pos. NO. _____
2.54mm Female _____
Header -High 8.4mm _____
1-Single layer 2-Double layer _____
3-Three layer _____
Tail Style: S=Straight Pin R=Right Pin T=SMT Pin _____
Total pin number (No.of 1~80pin) _____

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information