

Communication Accessories

KLS electronic
www.cnkls.com

Modular Jack Series

KLS12-303-1X4-1-6P-90 Modular Jack

- 1.Voltage Rating: 125VAC
- 2.Current Rating: 1.5A
- 3.Contact Resistance: 30MΩ Max.
- 4.Insulation Resistance: 500MΩ Min.@500VDC
- 5.Withstanding Resistance :1000VAC RMS. 50Hz 1minute

MATERIALS



- 1.Housing:GlassFilled PLYESTER UL94V-0ABS PBT NYLON
- 2.Housing color: BLACK, GRAY, IVORY, WHITE OR OTHERS
- 3.Contact: Phosphor Bronze Flat Pin
- 4.Plating:Gold Plating over nickel,Gold Platingthickness1.5u"/3u"
6u"/15u"/30u"/50u"
- 5.Shield: 0.23 Thickness Brass With Nickel Plated

MECHANICAL

- 1.Durability: 750 cycles Min.
- 2.PCB Retention pre-solder: 1 LB Min.

ENVIRONMENTAL

- 1.Storage:-40 C ~ +80 C

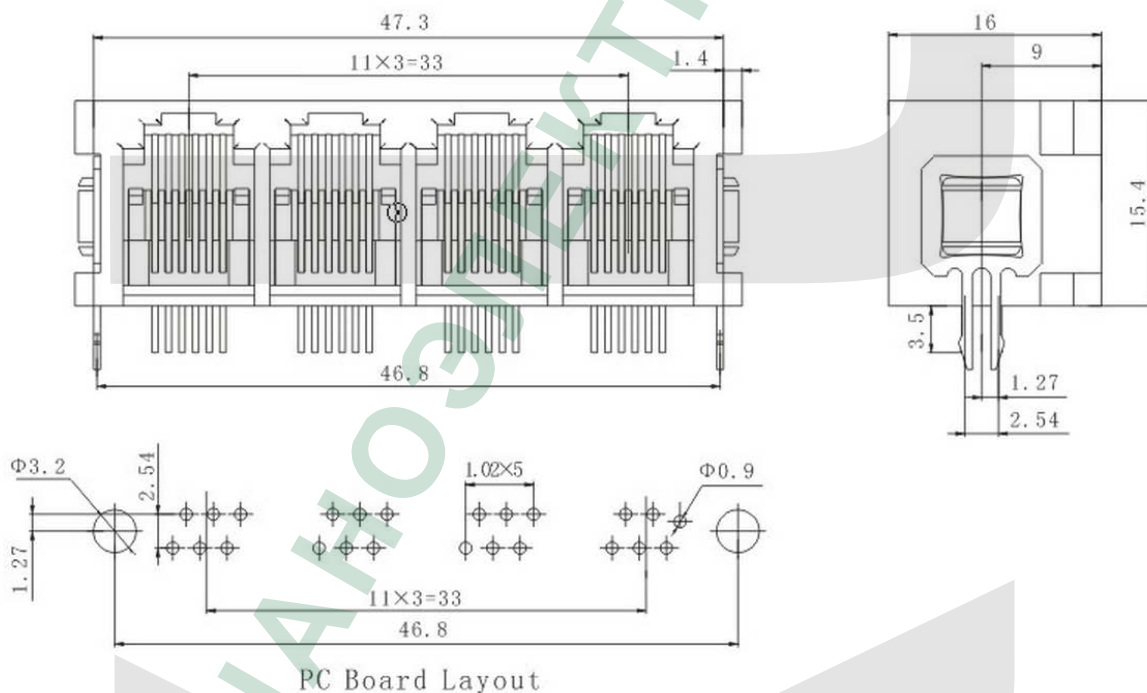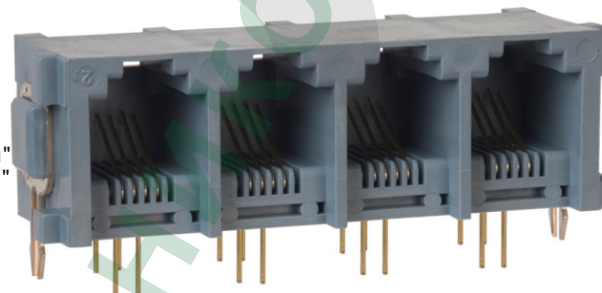

ORDER INFORMATION

KLS12-303 - X X X X X - X X X						
Part Number						
Port	6Point Contact	Iron Peg	Angle	Gold Thickness	Plastic	Part Color
2-1X2 P	2-6P2C	0-No Iron Peg	1-90° Angle	1-Fu"	1-Nylon 66	1-Black
4-1X4 P	4-6P4C	1-With Iron Peg	2-180° Angle	2-3u"	2-Nylon 46	2-Gray
	6-6P6C			3-6u"	3-PBT	3-White
				4-15u"	4-ABS	4-IV
				5-30u"		
				6-50u"		