

TERMINAL BLOCK Connector

LED connectors





KLS2-CT258 Spring Terminal

Material:

- 1, the plastic parts: PA66
- 2, the thickness of tin phosphor bronze: 0.8
- 3, spring: imported 301, 0.4 thick

Characteristics:

Rated voltage: 600 V
Rated current: 24 A
Operating temperature: $-40 \pm 105^{\circ}\text{C}$
High voltage: AC2000V/DC500V
Insulation impedance: 500 ohm /DC500V
The maximum tensile force: 8KG-10KG
Wire cross-section: $0.08 - 4 \text{ mm}^2$ 28 - 12 AWG

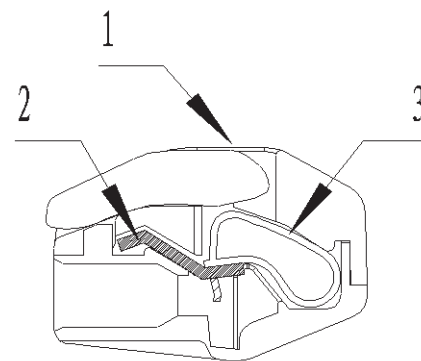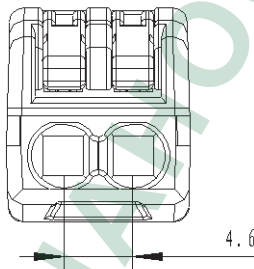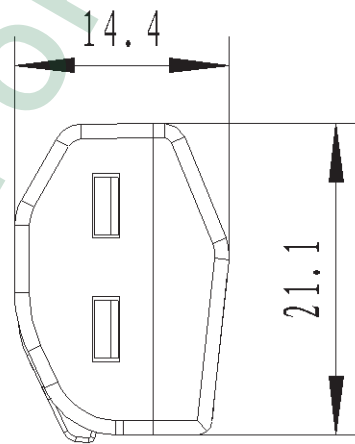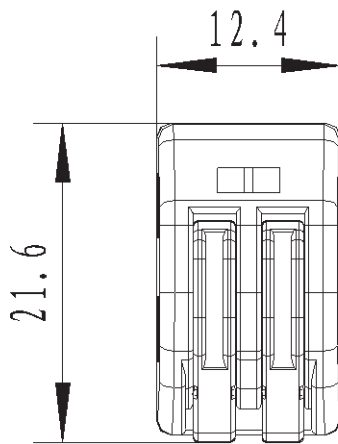

ORDER INFORMATION

Product NO.: KLS2-CT258-02P-1

Pos. NO.

LED connectors

Color: 1-Gray

Connector 2Pin

TERMINAL BLOCK Connector

KLSelectronic
www.cnkls.com

II

LED connectors





KLS2-CT258 Spring Terminal

Material:

- 1, the plastic parts: PA66
- 2, the thickness of tin phosphor bronze: 0.8
- 3, spring: imported 301,0.4 thick

Characteristics:

Rated voltage: 600 V
Rated current: 24 A
Operating temperature: $-40 \pm 105^{\circ}\text{C}$
High voltage: AC2000V/DC500V
Insulation impedance: 500 ohm /DC500V
The maximum tensile force: 8KG-10KG
Wire cross-section: $0.08 - 4 \text{ mm}^2$ 28 - 12 AWG

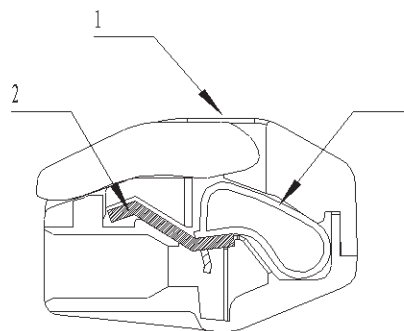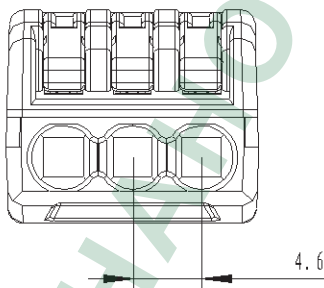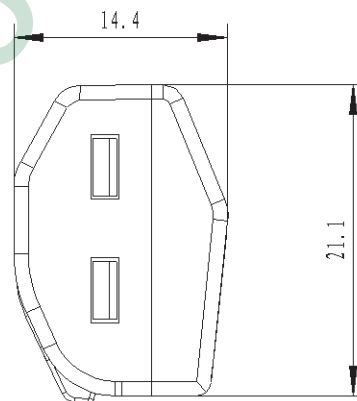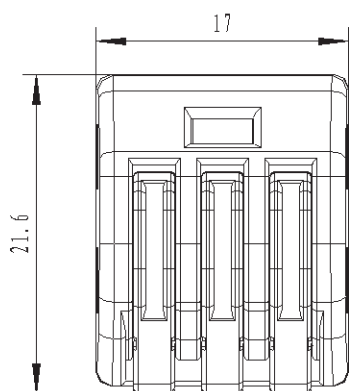

ORDER INFORMATION

Product NO.: KLS2-CT258-03P-1

Pos. NO.

LED connectors

Color: 1-Gray

Connector 3Pin

TERMINAL BLOCK Connector

KLSelectronic
www.cnkls.com

LED connectors





KLS2-CT258 Spring Terminal

Material:

- 1, the plastic parts: PA66
- 2, the thickness of tin phosphor bronze: 0.8
- 3, spring: imported 301,0.4 thick

Characteristics:

Rated voltage: 600 V
Rated current: 24 A
Operating temperature: $-40 \pm 105^{\circ}\text{C}$
High voltage: AC2000V/DC500V
Insulation impedance: 500 ohm /DC500V
The maximum tensile force: 8KG-10KG
Wire cross-section: 0.08 - 4 mm² 28 - 12 AWG

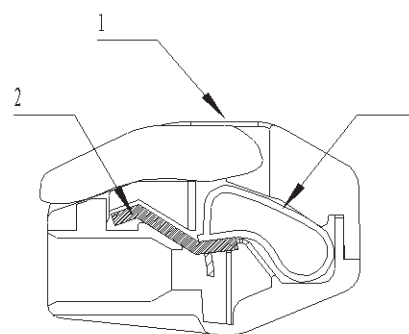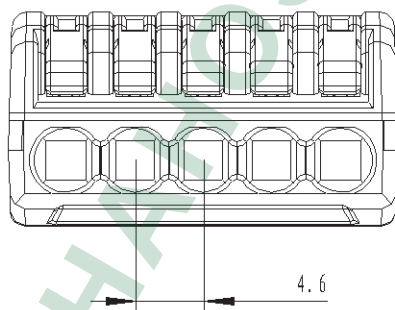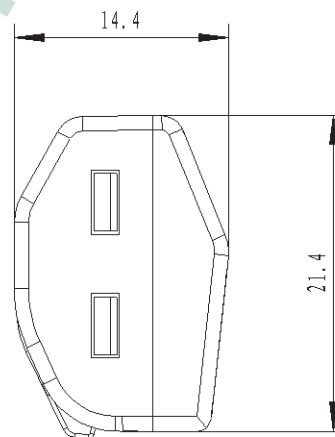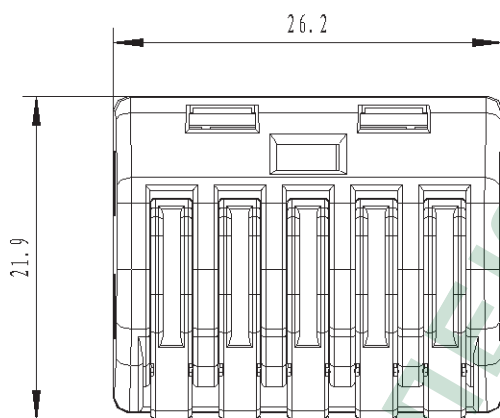

ORDER INFORMATION

Product NO.: KLS2-CT258-05P-1

Pos. NO.

LED connectors

Color: 1-Gray

Connector 5Pin