


Terminal block

Din Rail Terminal Blocks*Fuse Terminal Blocks Series

KLS2-DR-DK

Specification

Connector	wire section (mm) ²		Rated Current	Rated voltage	Dimensions
DK2.5	0.2-2.5	IEC60947-7-1	24A	800V	5×60×47
DK4	0.2-4	IEC60947-7-1	32A	800V	6×60×47
DK6	0.2-6	IEC60947-7-1	41A	800V	8×60×47
DK10	0.2-10	IEC60947-7-1	57A	800V	10×60×47
DK16	0.5-16	IEC60947-7-1	76A	800V	12×60×63
DK35	0.2-35	IEC60947-7-1	125A	800V	16×60×63
DK70	0.75-70	IEC60947-7-1	192A	800V	20×75×86
KDK2.5	0.2-2.5	IEC60947-7-1	16A	800V	5×60×49
BDK2.5	0.2-2.5	IEC60947-7-1	24A	800V	6×69×63
WDK2.5E	0.2-2.5	IEC60947-7-1	24A	800V	5×69×63

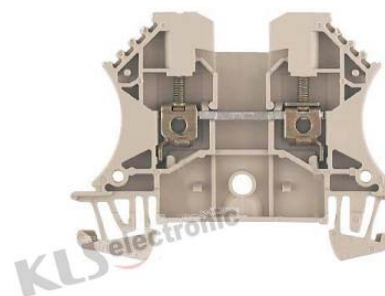

Connector	Hard wire(mm) ²		Rated Current	Dimensions
GK2.5	0.2-2.5	IEC60947-7-1	800V/24A	5×60×47
FDK4	70	IEC60947-7-1	500V/6.3A	8×60×60



DK2.5 47 60 thickness: 5	Dk4 47 60 thickness: 6	Dk6 47 60 thickness: 8	Dk10 47 60 thickness: 10
Dk16 63 60 thickness: 12	Dk35 63 60 thickness: 16	Dk70 86 75 thickness: 20	KDK2.5 49 60 switch type thickness: 5
FDK4 60 60 fuse type thickness: 8	BDK2.5 63 69 double level terminal thickness: 6	WDK2.5E 63 69 double level terminal thickness: 5	GK2.5 47 60 connecting-ground type thickness: 5

Terminal block

Din Rail Terminal Blocks*Fuse Terminal Blocks Series

KLS2-DR-JXB / KLS2-DR-JB

JXB Terminal Block

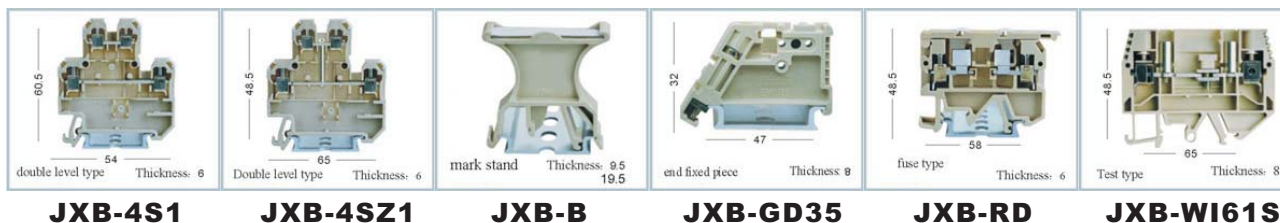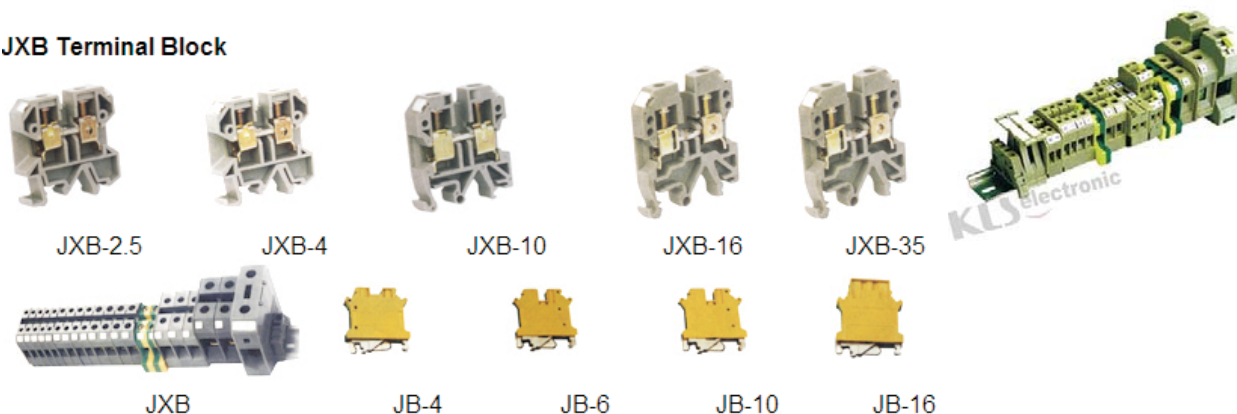

Specification

Connector		wire section (mm) ²	Rated Current	Rated voltage	Dimensions
JXB-2.5	IEC60947-7-1	0.2-2.5	24A	800V	6×41×46.5
JXB-4	IEC60947-7-1	0.2-4	32A	800V	6.5×42×52
JXB-6	IEC60947-7-1	0.2-6	41A	800V	8×42×52
JXB-10	IEC60947-7-1	0.2-10	57A	800V	10×42×52
JXB-16	IEC60947-7-1	0.5-16	76A	800V	12×42×52
JXB-35	IEC60947-7-1	10-35	125A	800V	18×50×57.5
JXB-70	IEC60947-7-1	25-70	192A	800V	22×75×87
JB-2.5	IEC60947-7-1	0.2-2.5	0	0	6×56×40
JB-4	IEC60947-7-1	0.2-4	0	0	7×56×44
JB-6	IEC60947-7-1	0.2-6	0	0	8×56×44

Connector	0	wire section (mm) ²	0	Dimensions
JB-10	IEC60947-7-1	0.5-10	0	10×56×44
JB-16	IEC60947-7-1	0.5-16	0	12×56×50
JB-35	IEC60947-7-1	10-35	0	16×58.5×56.4
JXB-4S1	IEC60947-7-1	0.2-4	500V/32A	6×54×60.5
JXB-4SZ1	IEC60947-7-1	0.2-4	500V/32A	6×65×48.5
JXB-B	IEC60947-7-1	0	0	0
JXB-GD35	IEC60947-7-1	0	0	8×47×32
JXB-RD	IEC60947-7-1	0.2-4	0	6×58×48.5
JXB-WI61S	IEC60947-7-1	0.2-4	400V/41A	8×65×48.5

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information


Terminal block

Din Rail Terminal Blocks*Fuse Terminal Blocks Series


KLS2-DR-UK / KLS2-UR-USLKG



UK Series General Model Terminal Block Specification



UK3N




UK5N

Connector	Hard wire (mm) ²	Soft wire (mm) ²	Rated Current	Rated voltage	Dimensions
UK2.5B	0.2-4	0.2-2.5	32A	690V	6.2×42.5×42
UK3N	0.2-4	0.2-2.5	32A	800V	5.2×42.5×47
UK5N	0.2-6	0.2-4	41A	800V	6.2×42.5×47
UK6N	0.2-10	0.2-2.5	57A	800V	8.2×42.5×47
UK10N	0.5-16	0.5-10	76A	800V	10.2×42.5×47
UK16N	0.2-25	4-16	101A	800V	12.2×42.5×52
UK35N	0.75-50	0.75	125A	1000V	15.2×50.0×62
UKH50	16-50	25-50	150A	1000V	62×70.5×83.5
UKH95	25-95	35-95	232A	1000V	25×83×97.5
UKH150	35-150	50-150	309A	1000V	31×100×118.5

Connector	Hard wire (mm) ²	Soft wire(mm) 2	Rated Current	Dimensions
USLKG2.5	0.2-4	0.2-2.5	32A	6.2×42.5×42
USLKG3	0.2-4	0.2-2.5	32A	5.2×42.5×47
USLKG5	0.2-6	0.2-4	41A	6.2×42.5×47
USLKG6N	0.2-10	0.2-6	57A	8.2×42.5×47
USLKG10N	0.5-16	0.5-10	76A	10.2×42.5×47
USLKG16N	2.5-25	4-16	101A	12.2×42.5×54
USLKG35N	0.75-50	0.75-35	150A	15.2×50.0×62
USLKG50	16-50	25-50	150A	20×70.5×81.5



UK6N



UK10N



USLKG3



USLKG5



USLKG10N




USLKG16N


Terminal block

Din Rail Terminal Blocks*Fuse Terminal Blocks Series


KLS2-DR-UK / KLS2-UR-USLKG

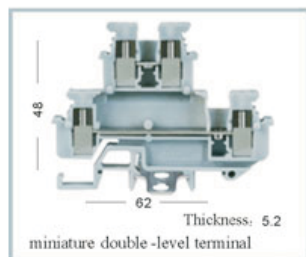


MBKKB 2.5

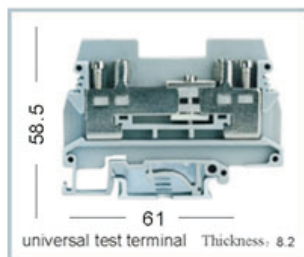


URTK/S

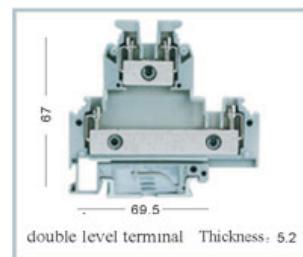


UKKB3

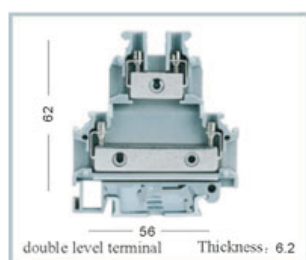

UKK5

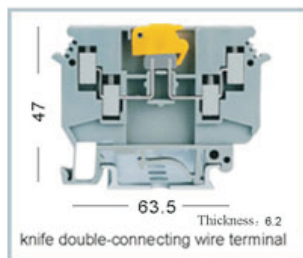

UKD4-P/P

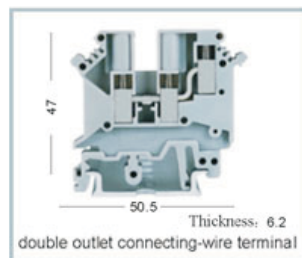


UK5-TWIN


Specification

Connector	Hard wire (mm) ²	wire section (mm) ²	Rated Current	Rated voltage	Dimensions
MBKKB 2.5	0.2-4	0.2-2.5	24A	500V	5.2×62×48
URTK/S	0.5-10	0.5-6	57A	500V	8.2×61×58.5
UKKB3	0.25-2.5	0.25-1.5	32A	500V	5.2×69.5×67
UKK5	0.2-4	0.2-4	32A	500V	6.2×56×62
UKD4-P/P	0.2-4	0.2-2.5	16A	690V	6.2×63.5×47
UK5-TWIN	0.2-4	0.2-4	32A	500V	6.2×50.5×47
UK5-RETURN	0.2-6	0.2-4	41A	500V	6.2×47.3×58.5
UDK4	0.2-4	0.2-2.5	32A	690V	6.2×63.5×47
MTK-P/P	0.2-4	0.2-2.5	16A	400V	5.2×46×51.5
MBK3/E-Z	0.2-4	0.2-2.5	32A	500V	5.2×28×31.

Connector	Hard wire (mm) ²	wire section (mm) ²	Rated voltage / Current	Dimensions
MBK 5/E-Z	0.2-6	0.2-4	500V/41A	5.2×28×31.5
UK5-HESI	0.2-4	0.2-4	800V/6.3A	8.2×72.5×56.5
UK10-DREHSI	0.5-16	0.5-16	800V/10A	12×62×59




UK5-RETURN




UDK4



MTK-P/P



MBK3/E-Z



MBK 5/E-Z



UK5-HESI