
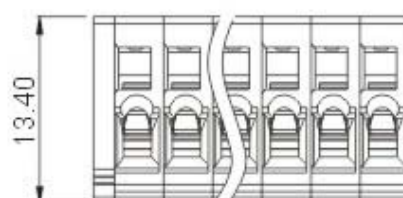

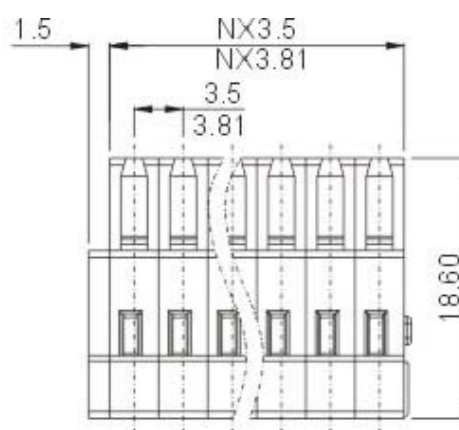


Terminal block

Multi Purpose Pluggable Terminal Blocks Series

KLS2-MPK-3.50/3.81 Series Pitch=3.50/3.81

Capability	
Rated voltage/Rated current	300V/10A
Wire range	28-14AWG 1.5mm ²
Withstand Voltage	AC2000V/1Min
Insulation resistance	5000MΩ/1000V
Contact resistance	20mΩ
Temp.Range	-40°C~+105°C
MAX Soldering	+250°C for 5Sec
Strip length	7-8mm
Material	
Housing	PA66,UL94V-0
Contact	Phosphor Bronze

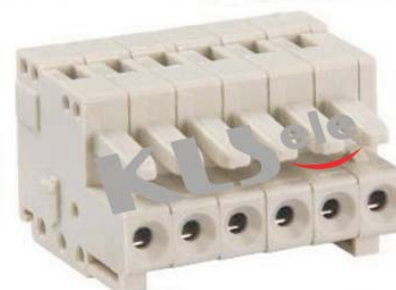

ORDER INFORMATION

HOW TO ORDER:

- **P** - -

Series No. No of Pole

Color

Screw

Customer Request

C CROSS SEREW
S SLOT SEREW


1 Gray	4 Green	7 Trans- parent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 White

Terminal block

Multi Purpose Pluggable Terminal Blocks Series

KLS2-MPK-5.00/7.50 Series Pitch=5.0/7.5

Capability	
Rated voltage/Rated current	300V/15A
Wire range	28-12AWG 2.5mm ²
Withstand Voltage	AC2000V/1Min
Insulation resistance	5000MΩ/1000V
Contact resistance	20mΩ
Temp.Range	-40°C~+105°C
MAX Soldering	+250°C for 5Sec
Strip length	8-9mm
Material	
Housing	PA66,UL94V-0
Contact	Phosphor Bronze

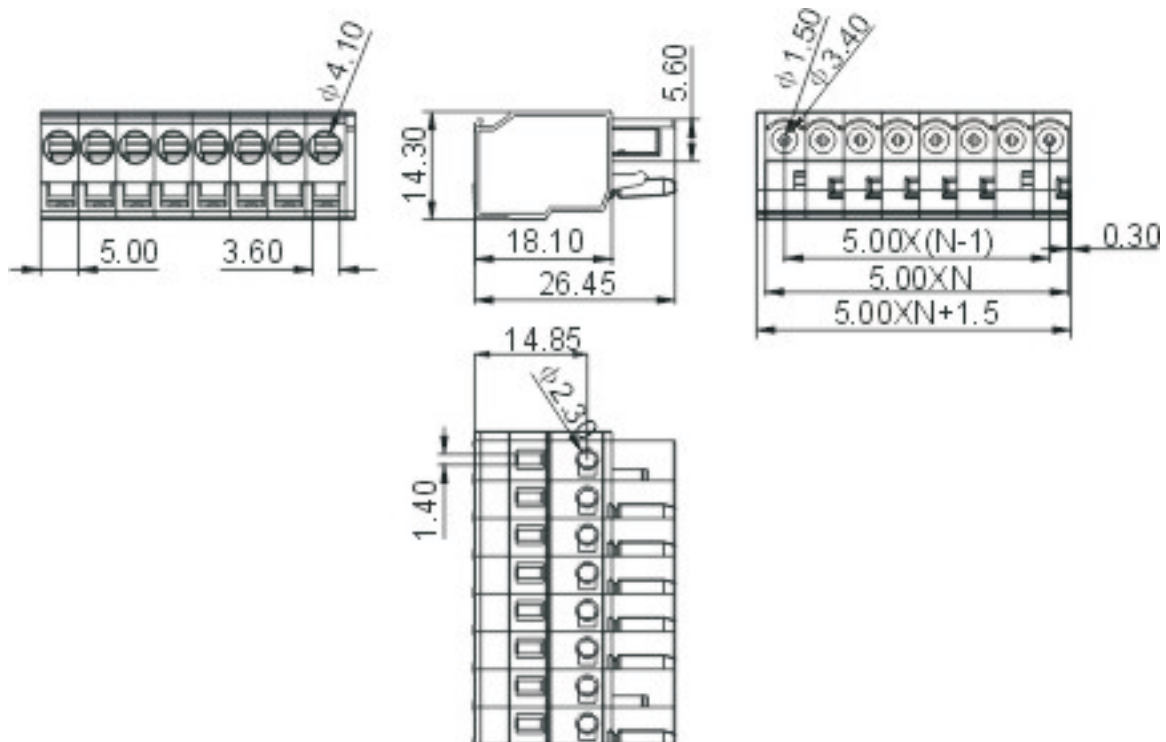

ORDER INFORMATION

HOW TO ORDER:

Series No. No of Pole Color Screw

Customer Request




1 Gray	4 Green	7 Trans- parent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 White

Terminal block

Multi Purpose Pluggable Terminal Blocks Series


KLS2-MPKG-3.50/3.81 Series Pitch=3.50/3.81

Capability	
Rated voltage/Rated current	300V/10A
Wire range	28-14AWG 1.5mm ²
Withstand Voltage	AC2000V/1Min
Insulation resistance	5000MΩ/1000V
Contact resistance	20mΩ
Temp.Range	-40°C~+105°C
MAX Soldering	+250°C for 5Sec
Strip length	7-8mm
Material	
Housing	PA66,UL94V-0
Contact	Phosphor Bronze

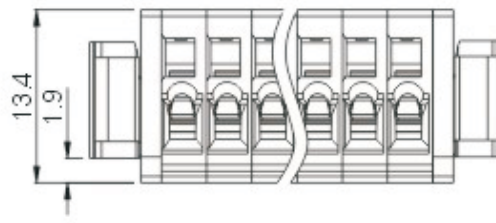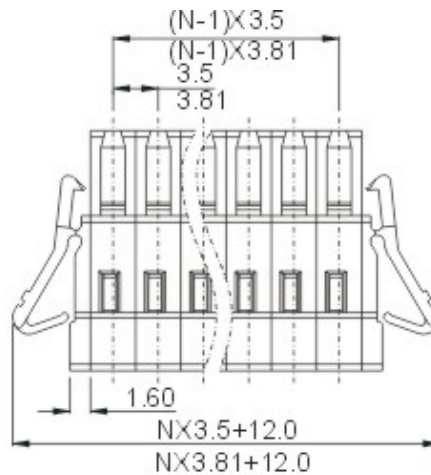

ORDER INFORMATION

HOW TO ORDER:

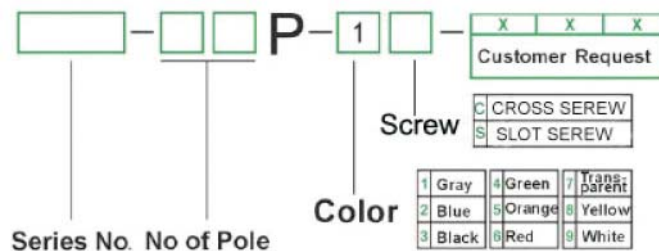


Terminal block

Multi Purpose Pluggable Terminal Blocks Series

KLS2-MPKG-5.00/7.50 Series Pitch=5.00/7.50

Capability	
Rated voltage/Rated current	300V/15A
Wire range	28-12AWG 2.5mm ²
Withstand Voltage	AC2000V/1Min
Insulation resistance	5000MΩ/1000V
Contact resistance	20mΩ
Temp.Range	-40°C~+105°C
MAX Soldering	+250°C for 5Sec
Strip length	8-9mm
Material	
Housing	PA66,UL94V-0
Contact	Phosphor Bronze

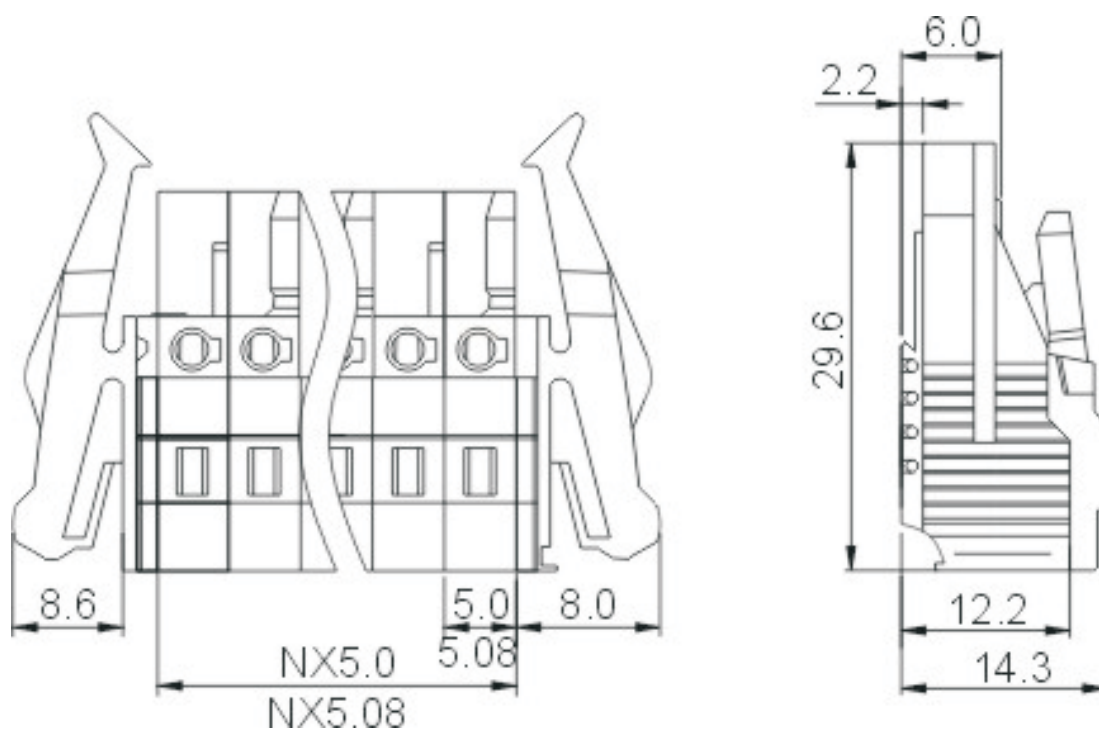

ORDER INFORMATION

HOW TO ORDER:

- P - -

Series No. No of Pole Color Screw

Customer Request		
C	CROSS SEREW	
S	SLOT SEREW	


1 Gray	4 Green	7 Trans- parent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 White

Terminal block

Multi Purpose Pluggable Terminal Blocks Series


KLS2-MPKH-5.00/7.50 Series Pitch=5.00/7.50

Capability	
Rated voltage/Rated current	300V/15A
Wire range	28-12AWG 2.5mm ²
Withstand Voltage	AC2000V/1Min
Insulation resistance	5000MΩ/1000V
Contact resistance	20mΩ
Temp.Range	-40°C~+105°C
MAX Soldering	+250°C for 5Sec
Strip length	8-9mm
Material	
Housing	PA66,UL94V-0
Contact	Phosphor Bronze

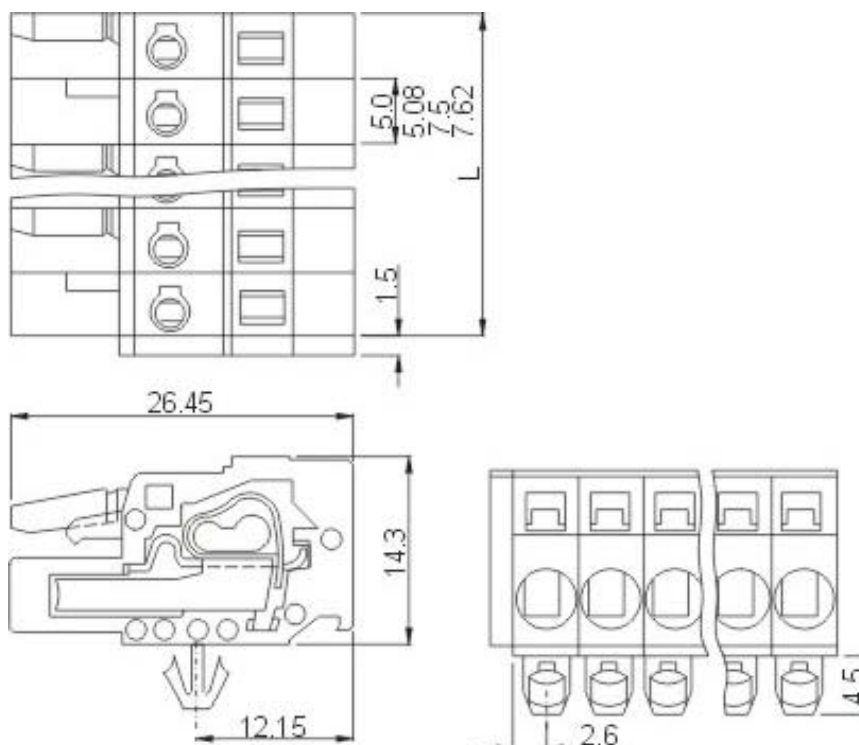

ORDER INFORMATION

HOW TO ORDER:

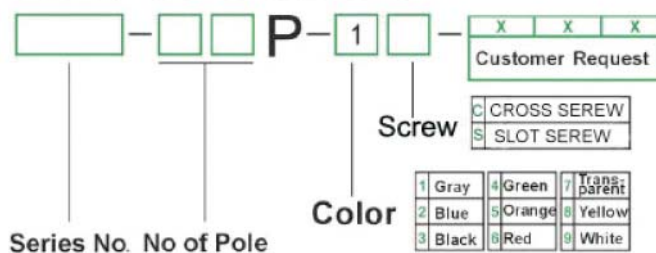


Terminal block

Multi Purpose Pluggable Terminal Blocks Series


KLS2-MPKN-3.50/3.81 Series Pitch=3.50/3.81

Capability	
Rated voltage/Rated current	300V/10A
Wire range	28-14AWG 1.5mm ²
Withstand Voltage	AC2000V/1Min
Insulation resistance	5000MΩ/1000V
Contact resistance	20mΩ
Temp.Range	-40°C~+105°C
MAX Soldering	+250°C for 5Sec
Strip length	7-8mm
Material	
Housing	PA66,UL94V-0
Pin header	Brass,Tin plated
Contact	Phosphor Bronze

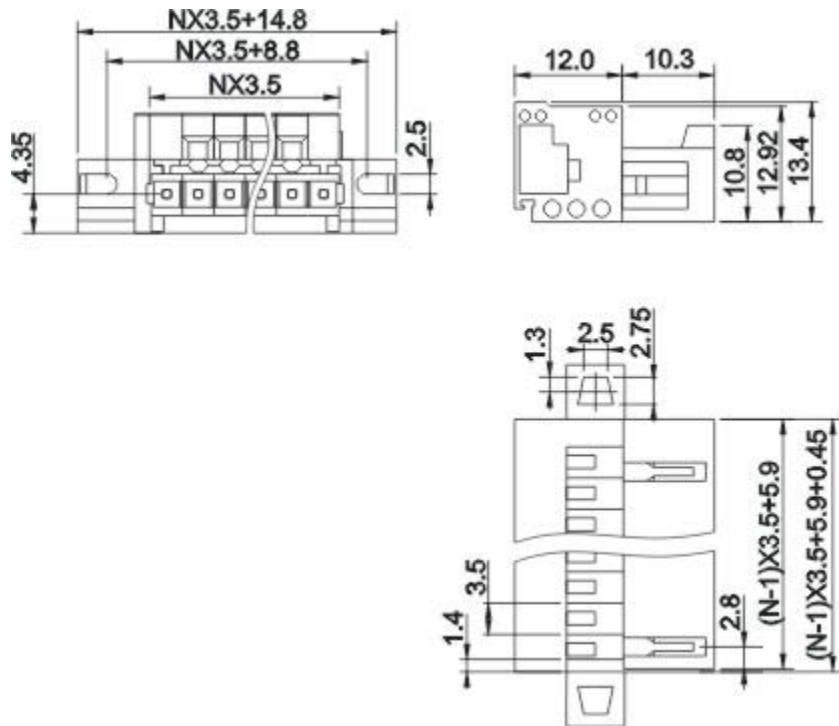

ORDER INFORMATION

HOW TO ORDER:

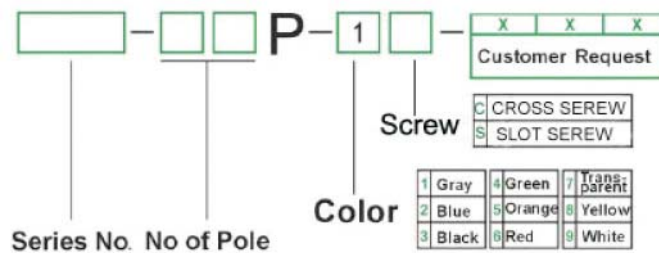


Terminal block

Multi Purpose Pluggable Terminal Blocks Series


KLS2-MPKR-5.00/7.50 Series Pitch=5.00/7.50

Capability	
Rated voltage/Rated current	300V/15A
Wire range	28-12AWG 2.5mm ²
Withstand Voltage	AC2000V/1Min
Insulation resistance	5000MΩ/1000V
Contact resistance	20mΩ
Temp.Range	-40°C~+105°C
MAX Soldering	+250°C for 5Sec
Strip length	8-9mm
Material	
Housing	PA66,UL94V-0
Contact	Phosphor Bronze

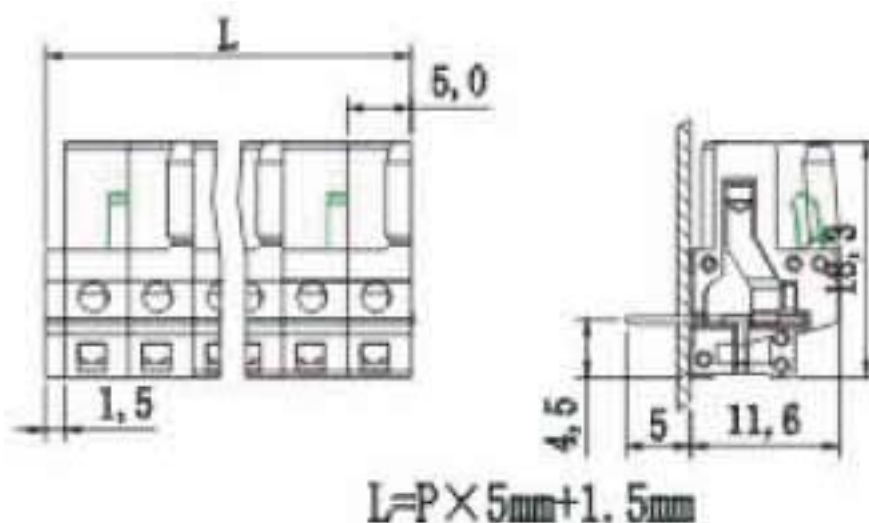

ORDER INFORMATION

HOW TO ORDER:

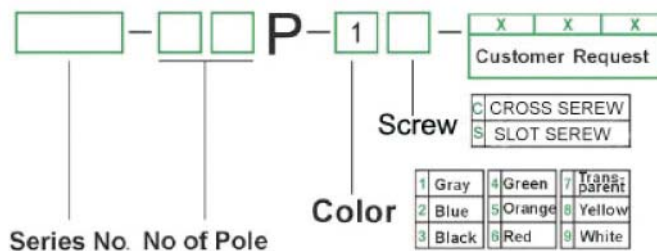


Terminal block

Multi Purpose Pluggable Terminal Blocks Series

KLS2-MPKS-5.00/7.50 Series Pitch=5.00/7.50

Capability	
Rated voltage/Rated current	300V/15A
Wire range	28-12AWG 2.5mm ²
Withstand Voltage	AC2000V/1Min
Insulation resistance	5000MΩ/1000V
Contact resistance	20mΩ
Temp.Range	-40°C~+105°C
MAX Soldering	+250°C for 5Sec
Strip length	8-9mm
Material	
Housing	PA66,UL94V-0
Contact	Phosphor Bronze

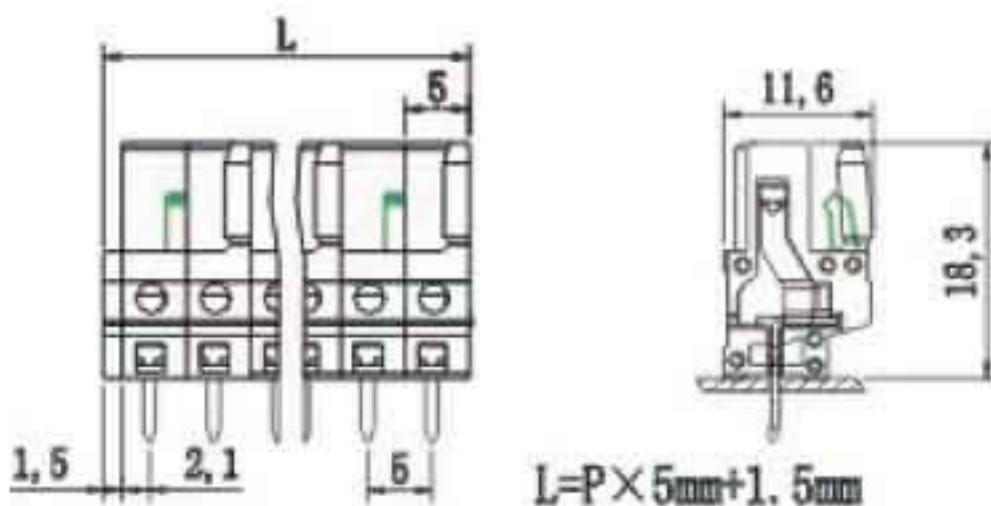

ORDER INFORMATION

HOW TO ORDER:

- **P** - -

Series No. No of Pole Color Screw

Customer Request		
C	CROSS SEREW	
S	SLOT SEREW	


1 Gray	4 Green	7 Trans- parent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 White

Terminal block

Multi Purpose Pluggable Terminal Blocks Series

KLS2-MPKV-3.50/3.81 Series Pitch=3.50/3.81

Capability	
Rated voltage/Rated current	300V/10A
Wire range	28-14AWG 1.5mm ²
Withstand Voltage	AC2000V/1Min
Insulation resistance	5000MΩ/1000V
Contact resistance	20mΩ
Temp.Range	-40°C~+105°C
MAX Soldering	+250°C for 5Sec
Strip length	7-8mm
Material	
Housing	PA66,UL94V-0
Pin header	Brass,Tin plated
Contact	Phosphor Bronze

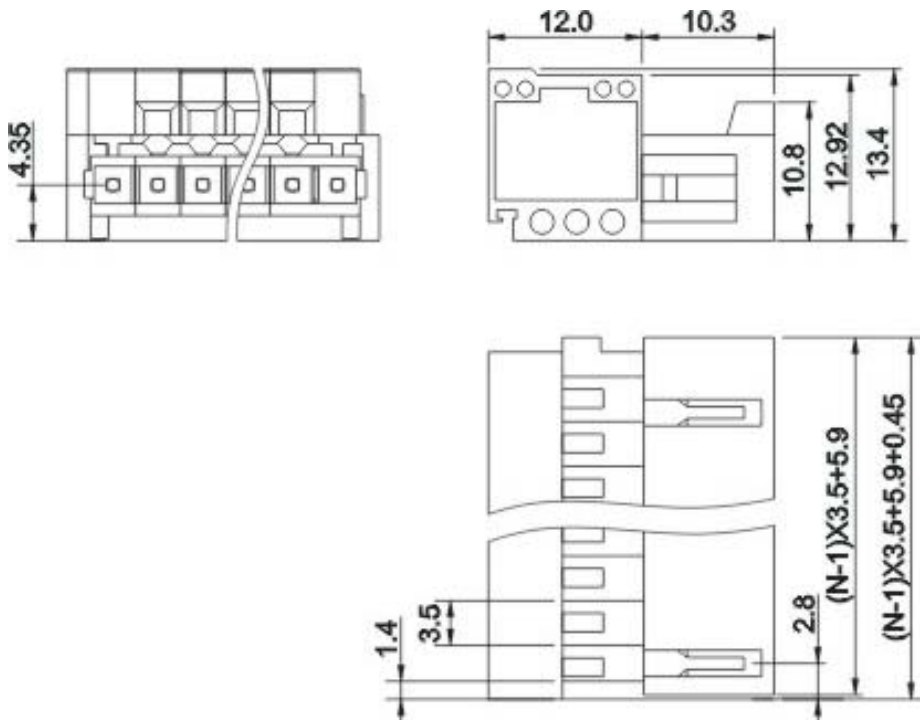

ORDER INFORMATION

HOW TO ORDER:

- P - 1 -

Series No. No of Pole

Screw

Color

Customer Request

C CROSS SEREW
S SLOT SEREW



1 Gray	4 Green	7 Trans- parent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 White

Terminal block

Multi Purpose Pluggable Terminal Blocks Series


KLS2-MPKV-5.00/7.50 Series Pitch=5.00/7.50

Capability	
Rated voltage/Rated current	300V/15A
Wire range	28-12AWG 2.5mm ²
Withstand Voltage	AC2000V/1Min
Insulation resistance	5000MΩ/1000V
Contact resistance	20mΩ
Temp.Range	-40°C~+105°C
MAX Soldering	+250°C for 5Sec
Strip length	8-9mm
Material	
Housing	PA66,UL94V-0
Contact	Phosphor Bronze

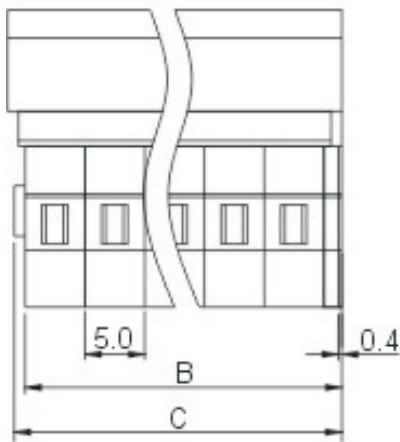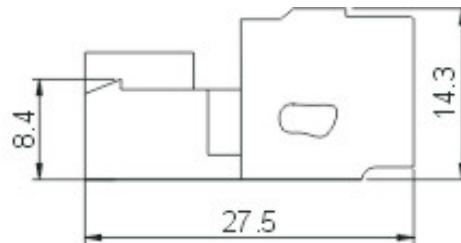

ORDER INFORMATION

HOW TO ORDER:

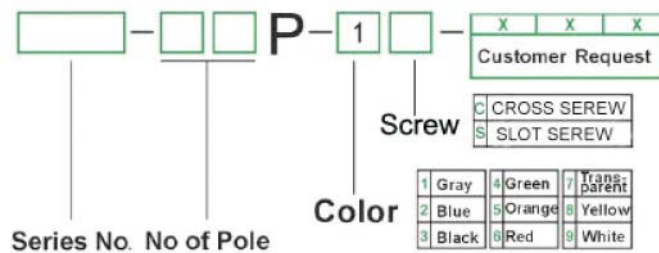


Terminal block

Multi Purpose Pluggable Terminal Blocks Series

KLS2-MPKY-5.00/7.50 Series Pitch=5.00/7.50

Capability	
Rated voltage/Rated current	300V/15A
Wire range	28-12AWG 2.5mm ²
Withstand Voltage	AC2000V/1Min
Insulation resistance	5000MΩ/1000V
Contact resistance	20mΩ
Temp.Range	-40°C~+105°C
MAX Soldering	+250°C for 5Sec
Strip length	8-9mm
Material	
Housing	PA66,UL94V-0
Contact	Phosphor Bronze

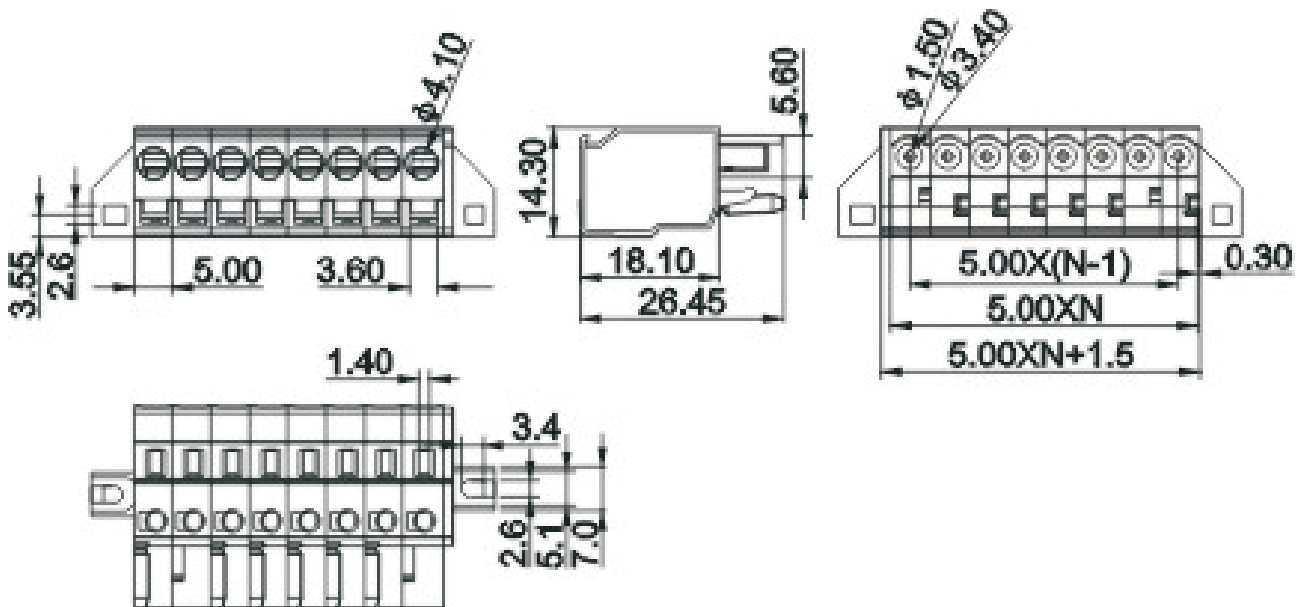

ORDER INFORMATION

HOW TO ORDER:

- P - - -

Series No. No of Pole Color Screw

Customer Request		
C	CROSS SEREW	
S	SLOT SEREW	


1 Gray	4 Green	7 Trans- parent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 White

Terminal block

Multi Purpose Pluggable Terminal Blocks Series

KLS2-MPR-3.50/3.81 Series Pitch=3.50/3.81

Capability	
Rated voltage/Rated current	300V/10A
Withstand Voltage	AC2000V/1Min
Insulation resistance	5000MΩ/1000V
Contact resistance	20mΩ
Temp.Range	-40°C~+105°C
MAX Soldering	+250°C for 5Sec
Material	
Housing	PA66,UL94V-0
Pin header	Brass,Tin plated

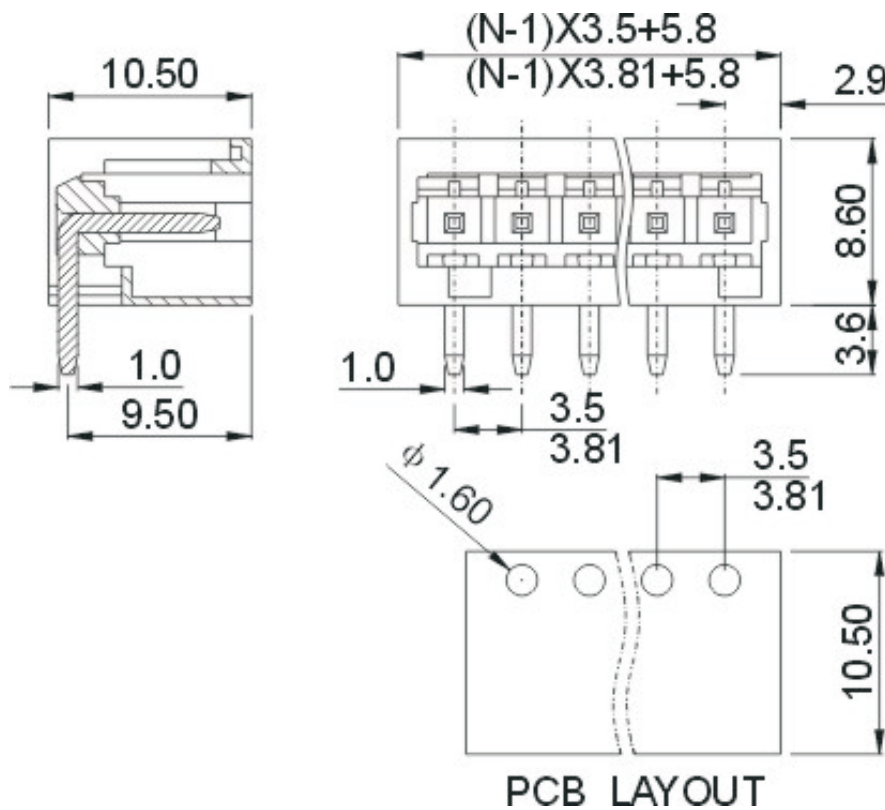

ORDER INFORMATION

HOW TO ORDER:

- P - - -

Series No. No of Pole Color Screw

Customer Request		
C	CROSS SEREW	
S	SLOT SEREW	


1 Gray	4 Green	7 Trans-parent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 White

Terminal block

Multi Purpose Pluggable Terminal Blocks Series

KLS2-MPRA-5.00/7.50 Series Pitch=5.00/7.50


Capability	
Rated voltage/Rated current	300V/15A
Wire range	28-12AWG 2.5mm ²
Withstand Voltage	AC2000V/1Min
Insulation resistance	5000MΩ/1000V
Contact resistance	20mΩ
Temp.Range	-40°C~+105°C
MAX Soldering	+250°C for 5Sec
Strip length	8-9mm
Material	
Housing	PA66,UL94V-0
Contact	Phosphor Bronze

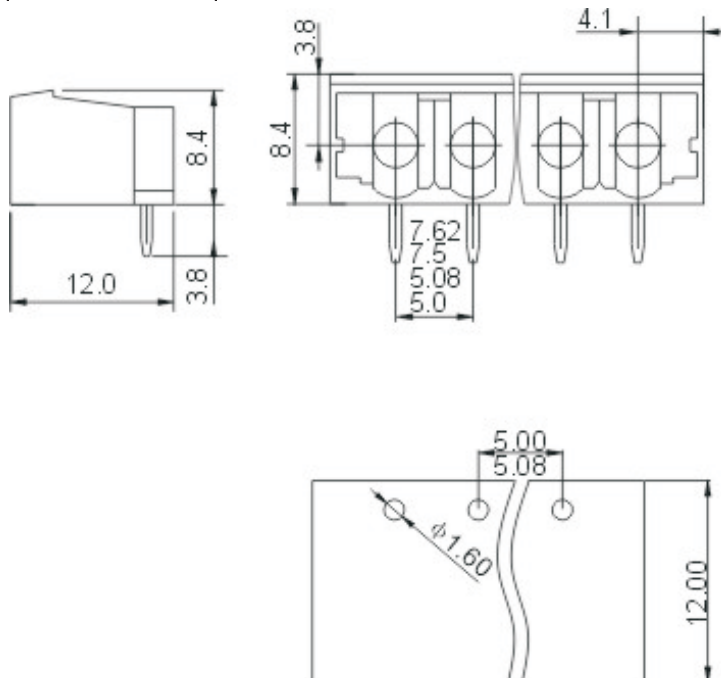

PCB LAYOUT

ORDER INFORMATION

HOW TO ORDER:



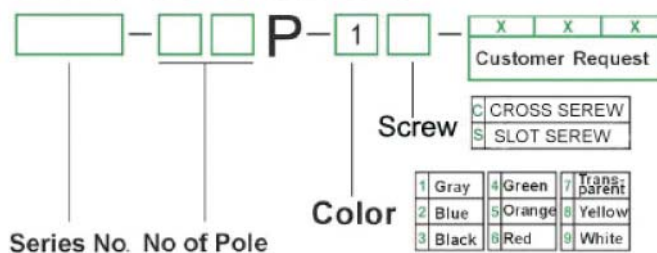


Terminal block

Multi Purpose Pluggable Terminal Blocks Series

KLS2-MPRB-5.00/7.50 Series Pitch=5.00/7.50

Capability	
Rated voltage/Rated current	300V/15A
Wire range	28-12AWG 2.5mm ²
Withstand Voltage	AC2000V/1Min
Insulation resistance	5000MΩ/1000V
Contact resistance	20mΩ
Temp.Range	-40°C~+105°C
MAX Soldering	+250°C for 5Sec
Strip length	8-9mm
Material	
Housing	PA66,UL94V-0
Contact	Phosphor Bronze

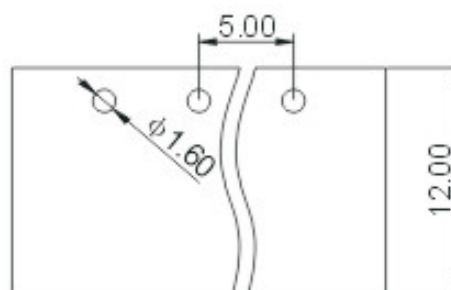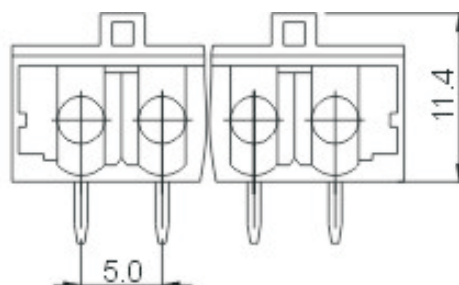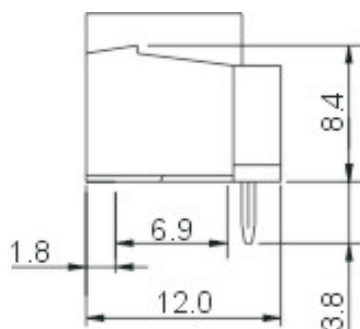

PCB LAYOUT

ORDER INFORMATION

HOW TO ORDER:

- **P** - -

Series No. No of Pole Color Screw

Customer Request		
C	CROSS SEREW	
S	SLOT SEREW	


1 Gray	4 Green	7 Trans- parent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 White

Terminal block

Multi Purpose Pluggable Terminal Blocks Series

KLS2-MPV-3.50/3.81 Series Pitch=3.50/3.81

Capability	
Rated voltage/Rated current	300V/10A
Withstand Voltage	AC2000V/1Min
Insulation resistance	5000MΩ/1000V
Contact resistance	20mΩ
Temp.Range	-40°C~+105°C
MAX Soldering	+250°C for 5Sec
Material	
Housing	PA66,UL94V-0
Pin header	Brass,Tin plated

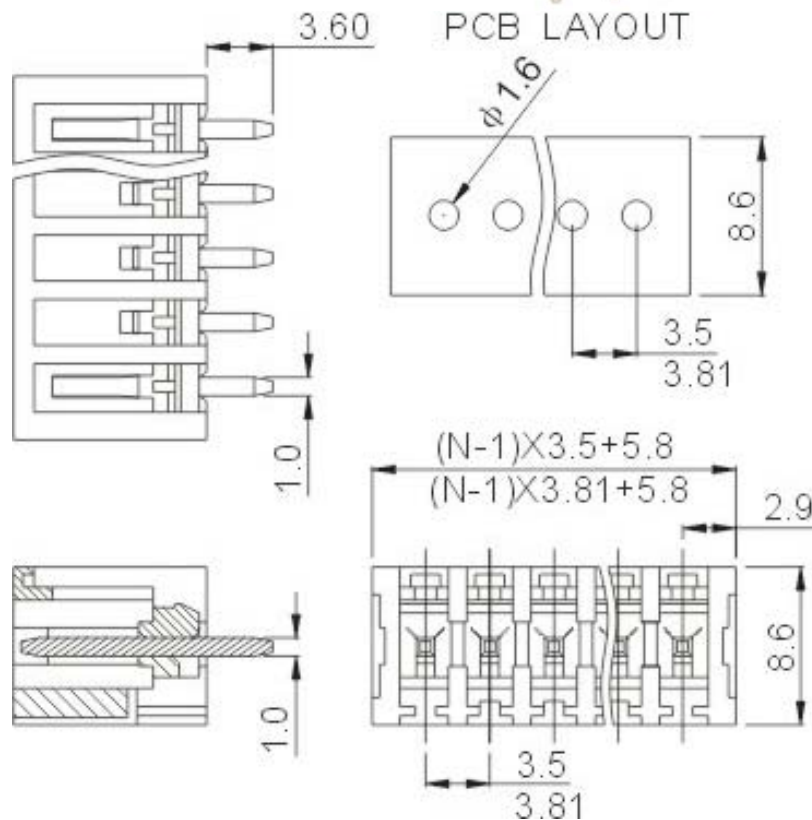

ORDER INFORMATION

HOW TO ORDER:

- P - 1 -

Series No. No of Pole

Screw

C	CROSS SEREW
S	SLOT SEREW

Color

1 Gray	4 Green	7 Trans-parent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 White

Customer Request




X	X	X
---	---	---

Terminal block

Multi Purpose Pluggable Terminal Blocks Series

KLS2-MPVA-5.00/7.50 Series Pitch=5.00/7.50

Capability	
Rated voltage/Rated current	300V/15A
Wire range	28-12AWG 2.5mm ²
Withstand Voltage	AC2000V/1Min
Insulation resistance	5000MΩ/1000V
Contact resistance	20mΩ
Temp.Range	-40°C~+105°C
MAX Soldering	+250°C for 5Sec
Strip length	8-9mm
Material	
Housing	PA66,UL94V-0
Contact	Phosphor Bronze

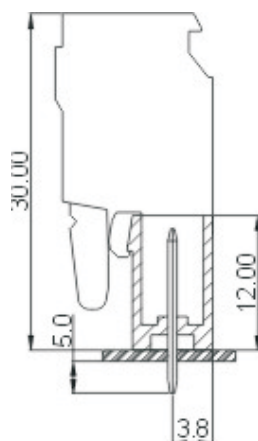

PCB LAY OUT

ORDER INFORMATION

HOW TO ORDER:

- **P** - -

Series No. No of Pole Color Screw

Customer Request		
C	CROSS SEREW	
S	SLOT SEREW	



1 Gray	4 Green	7 Trans- parent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 White

Terminal block

Multi Purpose Pluggable Terminal Blocks Series

KLS2-MPVB-5.00/7.50 Series Pitch=5.00/7.50

Capability	
Rated voltage/Rated current	300V/15A
Wire range	28-12AWG 2.5mm ²
Withstand Voltage	AC2000V/1Min
Insulation resistance	5000MΩ/1000V
Contact resistance	20mΩ
Temp.Range	-40°C~+105°C
MAX Soldering	+250°C for 5Sec
Strip length	8-9mm
Material	
Housing	PA66,UL94V-0
Contact	Phosphor Bronze

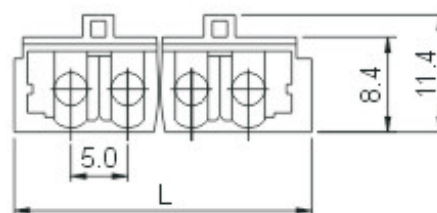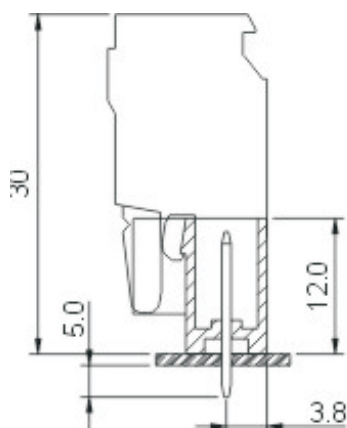

PCB LAY OUT

ORDER INFORMATION

HOW TO ORDER:

