

Connector

KLS electronic
www.cnkls.com

USB Series

KLS1-181A USB-AF PCB Right Angle.DIP Type

Material:

Housing: 30% Glass filled PBT UL94V-0

Contacts: Phosphor Bronze

Pin Plated: Gold 3u" over 50u" nickel

Electrical Characteristics:





Current Rating: 1 AMP

Insulator Resistance: 1000M Ohm min. at 500 VDC

Dielectric Withstanding Voltage: 500 VAC / Minute

Contact Resistance: 30m Ohm max.

Temperature: -55°C ~+105°C

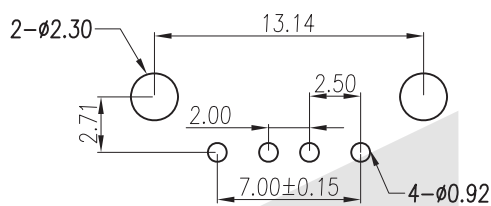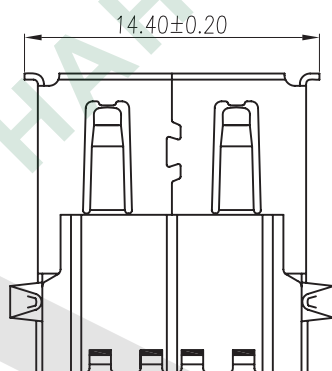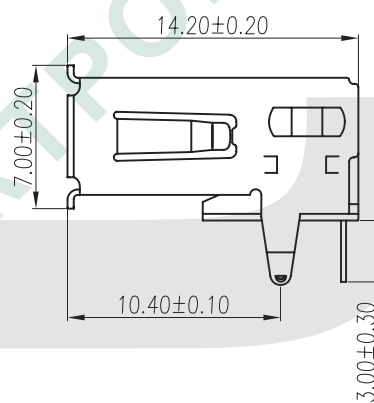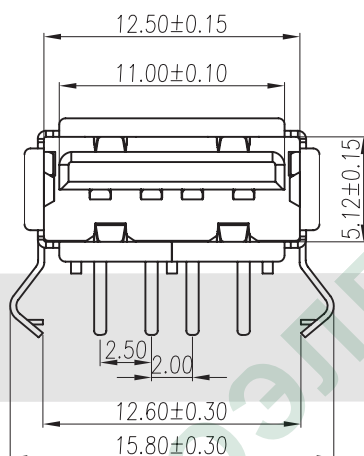

RECOMMENDED PCB LAYOUT

ORDER INFORMATION

Product NO.: KLS1 - 181A - B

Pos. NO.

USB-AF PCB

Right Angle.DIP Type

Color: W=White B=Black

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information