

Connector

Box Header Series

KLS1-201 Ejector Header 2.54mm(0.100")

Electrical Characteristics:



Current Rating: 1 AMP
Insulator Resistance: 5000MΩmin. at DC 500V
Contact Resistance: 20mΩmax. at DC 100mA
Operating Temperature: -45°C~+105°C

Material:

Housing: 30% Glass filled PBT UL94V-0
Contacts: Brass
Plating: Gold plated: 2u". over 50u" nickel

Features:

- * Fully shrouded provides ultimate reliability,
- * Black or gray insulator available.
- * Choices of Eject lever.

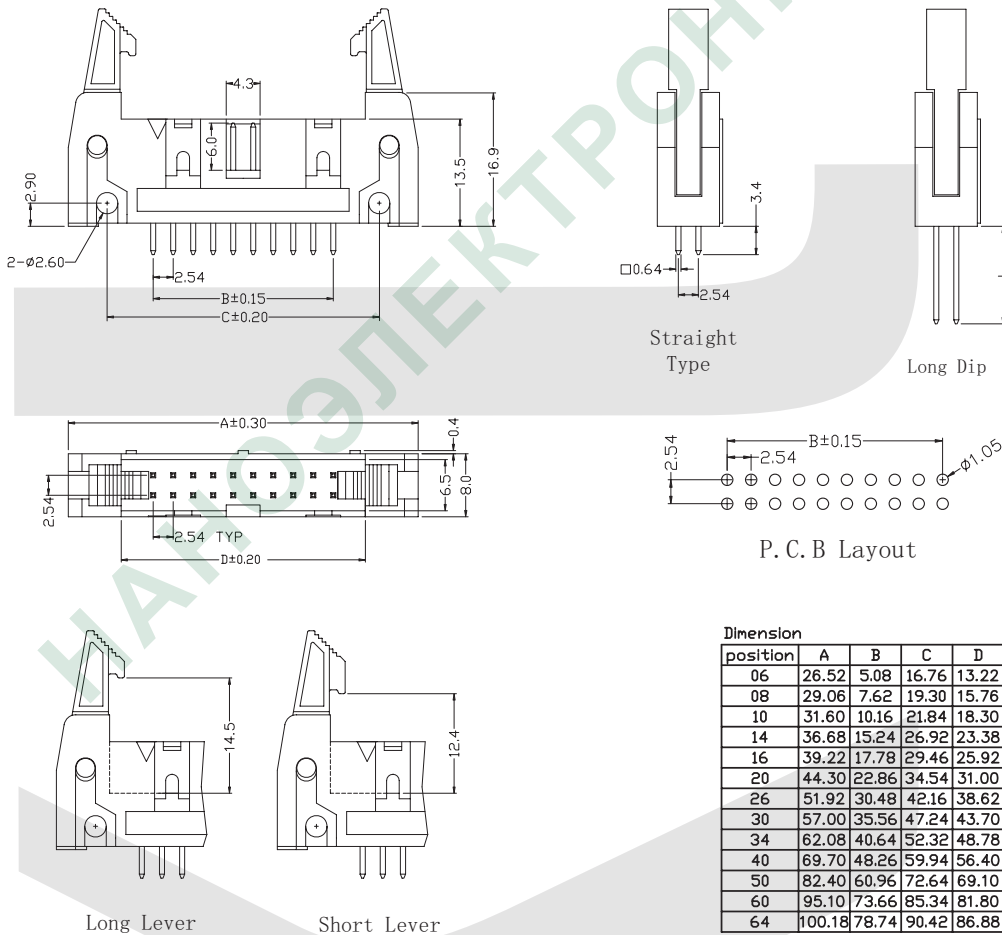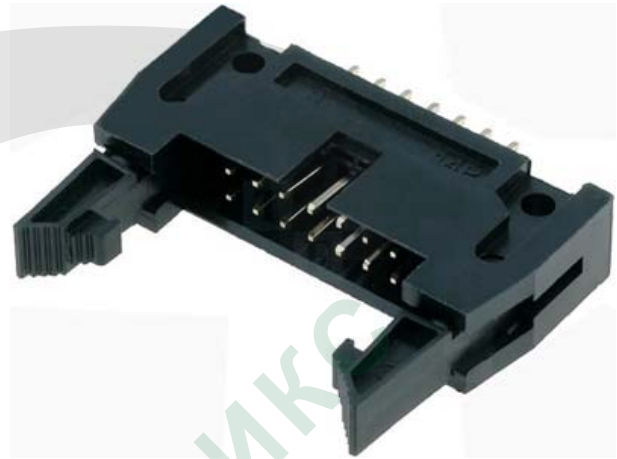

ORDER INFORMATION

Product No.: KLS1-201-XX-S-B

Pos. No. _____ Insulator Color: B=Black G=Gray
Ejector Header 2.54mm Series _____ Tail Style: S=Straight Pin R=Right Pin
Number of Contacts: XX=06-64Pin _____

Connector

Box Header Series

KLS1-201 Ejector Header 2.54mm(0.100")

Electrical Characteristics:


Current Rating: 1 AMP
Insulator Resistance: 5000MΩmin. at DC 500V
Contact Resistance: 20mΩmax. at DC 100mA
Operating Temperature: -45°C~+105°C

Material:

Housing: 30% Glass filled PBT UL94V-0
Contacts: Brass
Plating: Gold plated: 2u". over 50u" nickel

Features:

- * Fully shrouded provides ultimate reliability,
- * Black or gray insulator available.
- * Choices of Eject lever.

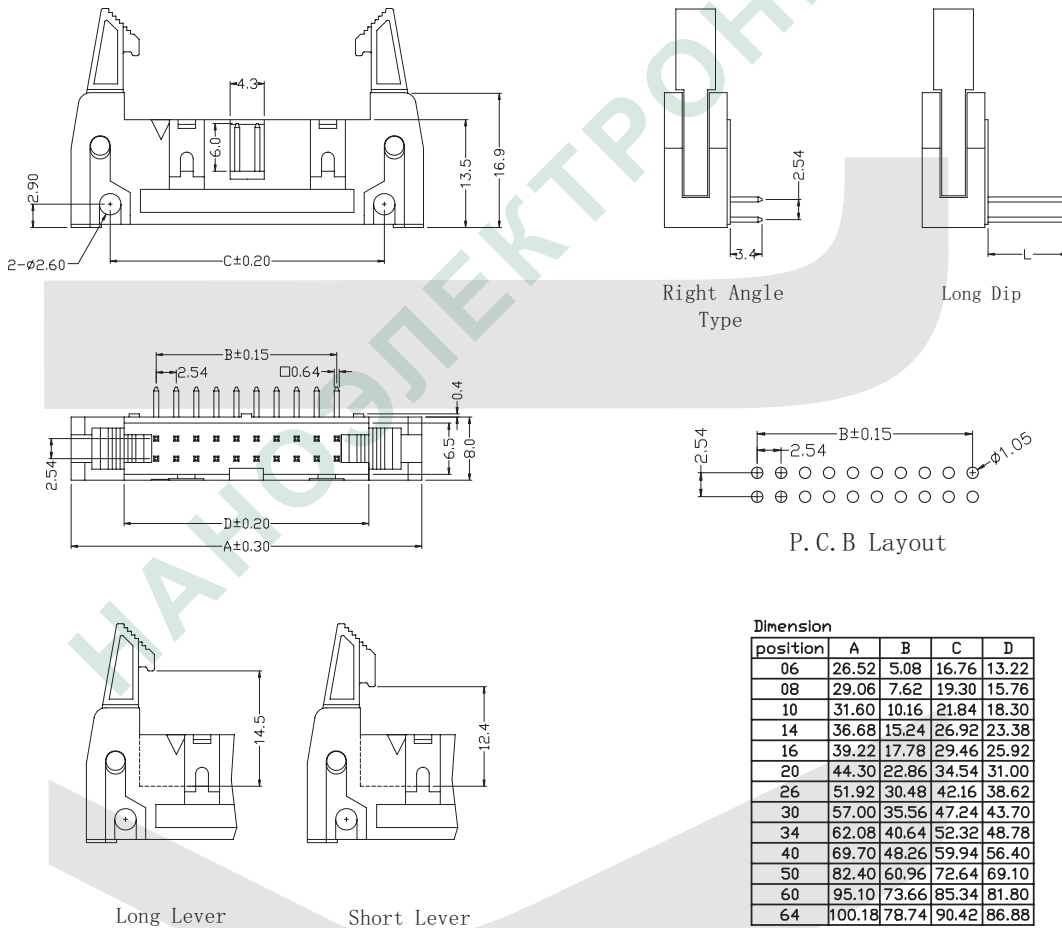

ORDER INFORMATION

Product No.: KLS1-201-XX-S-B

Pos. No. _____ Insulator Color: B=Black G=Gray
Ejector Header 2.54mm Series _____ Tail Style: S=Straight Pin R=Right Pin
Number of Contacts: XX=06-64Pin _____