

Connector

KLS electronic
www.cnkls.com

I.D.C Socket Series

KLS1-204B I.D.C SOCKET 2.00mm (0.079")

Electrical Characteristics:






Current Rating: 1 AMP
Insulator Resistance: 5000M Ohm min. at DC 500V
Contact Resistance: 20m Ohm max. at DC 100mA
Operating Temperature: -45°C~+105°C

Material:

Housing: 30% Glass filled PBT UL94V-0
Contacts: Brass or Phosphor Bronze
Plating: Selective gold plated: gold plated on mating area and Nickel plated on wire cutting area
Gold plated: 3u" over 50u" nickel
Cable: 1.00mm (0.039") pitch flat cable

Features:

- * Optional polarizing key, polarizing bump.
- * Optional strain relief.

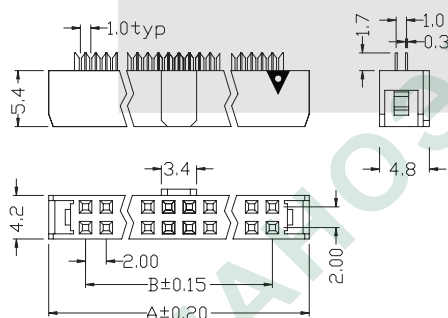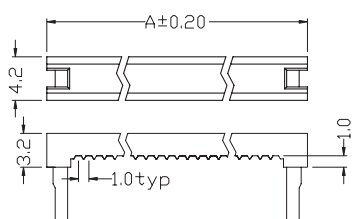

Position	Dimension	
	A	B
10	15.10	8.00
14	19.10	12.00
16	21.10	14.00
18	23.10	16.00
20	25.10	18.00
22	27.10	20.00
24	29.10	22.00
26	31.10	24.00
30	35.10	28.00
34	39.10	32.00
40	45.10	38.00
44	49.10	42.00
50	55.10	48.00

ORDER INFORMATION

Product NO.: KLS1-204B-XX-B

Pos. NO.

Insulator Color: B=Black G=Gray L=Blue

I.D.C SOCKET 2.0mm Series

Number of Contacts: XX=08-64Pin

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information