

Connector

KLS electronic
www.cnkls.com

DIP PLUG Series

KLS1-205B DIP PLUG 2.00mm(0.079") / MF.D扁平电缆连接器

Electrical Characteristics:




Current Rating: 1 AMP
Insulator Resistance: 5000MΩmin. at DC 500V
Contact Resistance: 20mΩmax. at DC 100mA
Operating Temperature: -45°C~+105°C

Material:

Housing: 30% Glass filled PBT UL94V-0
Contacts: Phosphor Bronze
Plating: Gold plated: 2u", over 50u" nickel
Tin plated: 100u", over 50u" nickel
Cable: 1.00mm(0.039") pitch flat cable



Features:

- * Fast connection of flat cable to PC board.
- * Plug directly into 2.00mmX2.00mm PC board.

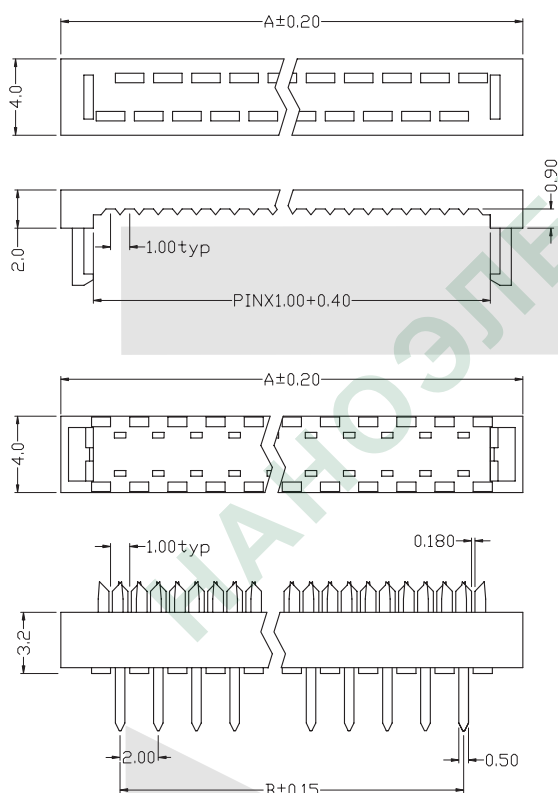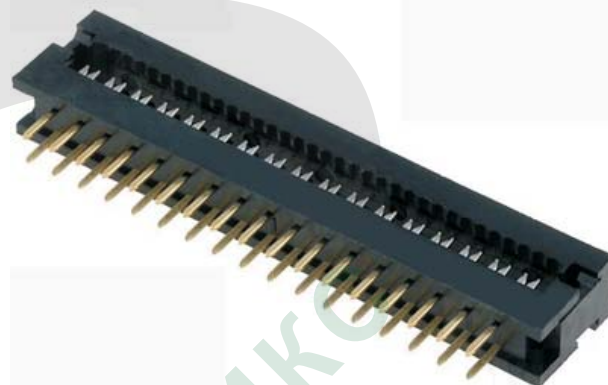

Dimension

Position	A	B
08	12.20	6.00
10	14.20	8.00
12	16.20	10.00
16	20.20	14.00
18	22.20	16.00
20	24.20	18.00
22	26.20	20.00
24	28.20	22.00
26	30.20	24.00
30	34.20	28.00
34	38.20	32.00
40	44.20	38.00
44	48.20	42.00
50	54.20	48.00



P.C.B Layout

ORDER INFORMATION

Product No.: KLS1-205B-XX-B

Pos. No. _____ Insulator Color: B=Black G=Gray
DIP PLUG 2.00mm Series _____ Number of Contacts: XX=10-50Pin

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information