

Connector

KLS electronic
www.cnkls.com

FFC/FPC Series



KLS1-219 FFC/FPC CONNECTOR 2.54mm Straight Pin Type

Electrical Characteristics:

Current Rating: 1 AMP
Insulator Resistance: 5000MΩmin. at DC 500V
Contact Resistance: 20mΩmax. at DC 100mA
Operating Temperature: -45°C~+105°C

Material:

Housing: 30% Glass filled PBT UL94V-0
Contacts: Phosphor Bronze
Plating: Tin plated: 100u" over 50u" nickel

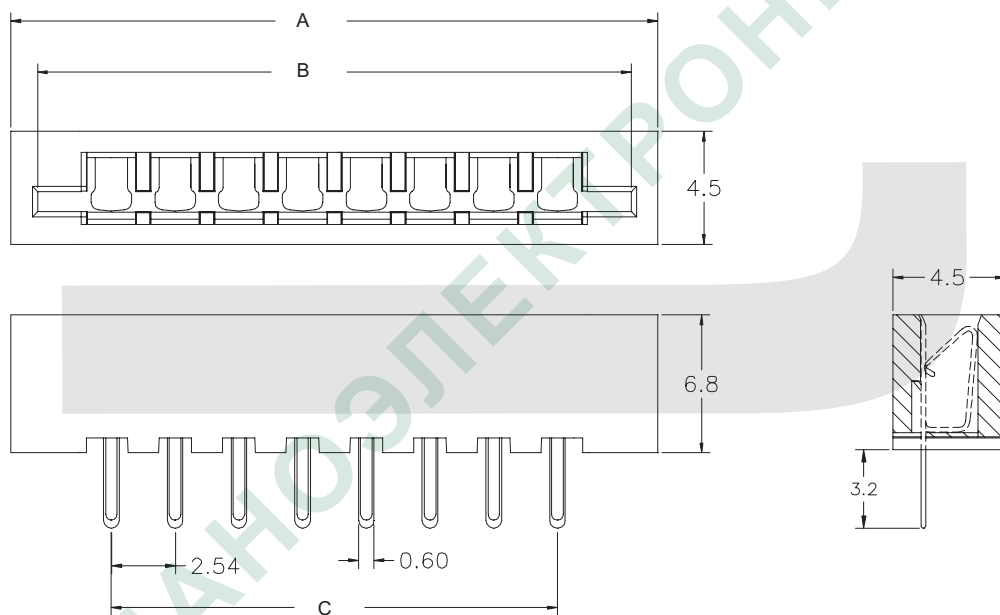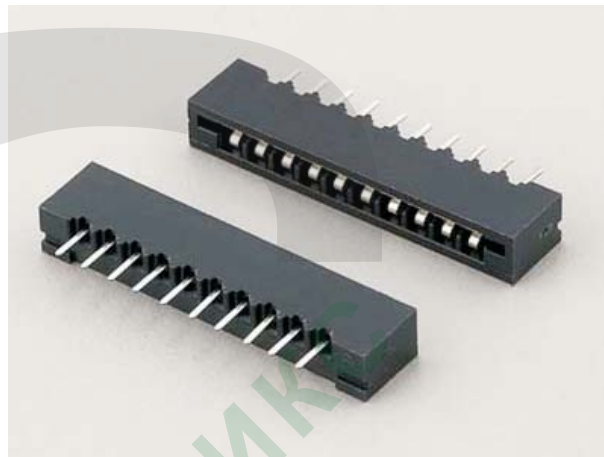

Position	3 Thru 21
Dimension	
A±0.20	2.54 × (N+2)
B±0.15	2.54 × N+2.68
C±0.15	2.54 × (N-1)

P.C.B Layout

ORDER INFORMATION

Product No.: KLS1-219-XX-S

Pos. No. _____ Tail Style: S=Straight Pin R=Right Pin
FFC/FPC CONNECTOR 2.54mm Series _____ Number of Contacts _____

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information

Connector

KLS electronic
www.cnkls.com

FFC/FPC Series





KLS1-219 FFC/FPC CONNECTOR 2.54mm Right Pin Type

Electrical Characteristics:

Current Rating: 1 AMP
Insulator Resistance: 5000MΩmin. at DC 500V
Contact Resistance: 20mΩmax. at DC 100mA
Operating Temperature: -45°C~+105°C

Material:

Housing: 30% Glass filled PBT UL94V-0
Contacts: Phosphor Bronze
Plating: Tin plated: 100u" over 50u" nickel

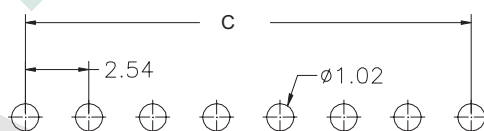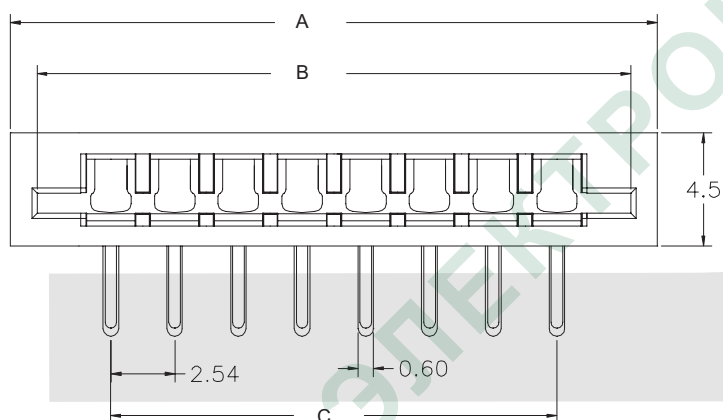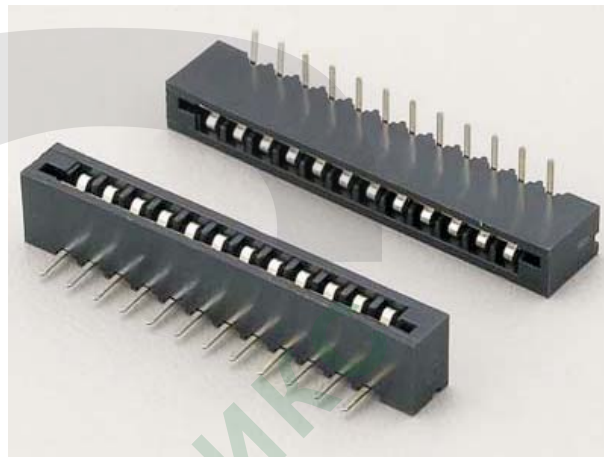

P.C.B Layout

Position	3 Thru 21
Dimension	
A±0.20	2.54 × (N+2)
B±0.15	2.54 × N+2.68
C±0.15	2.54 × (N-1)

ORDER INFORMATION

Product No.: KLS1-219-XX-R

Pos. No. _____ Tail Style: S=Straight Pin R=Right Pin
FFC/FPC CONNECTOR 2.54mm Series _____ Number of Contacts _____

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information