

Communication Accessories

KLS electronic
www.cnkls.com

PCB Modular Jack Series

KLS12-144-6P PCB Modular Jack 57 Series

MATERIAL

- 1.Housing Material: Glass Filled Polyester UL94V-0 PBT, NYLON
- 2.Housing Color: Black, Gray, Ivory, White or Others
- 3.Contact Material: Phosphor Bronze 0.35mm Flat Pin
- 4.PLATING: Gold plating over nickel. Gold plating thickness
1.5u" / 3u" / 6u" / 15u" / 30u" / 50u"

ELECTRICAL



- 1.Current Rating:1.5Amp
- 2.Voltage Rating:125VAC
- 3.Contact Resistance: 30 MΩ Max.
- 4.Insulation Resistance: 500 MΩ Min. @500VDC
- 5.Withstanding Voltage:1000VAC RMS 50Hz 1 minute

MECHANICAL




- 1.Durability : 750 cycles Min.
- 2.PCB Retention pre-solder : 1 LB MIN

ENVIRONMENTAL

- 1.Storage :-40°C~+80°C
- 2.Operation:-40°C~+70°C

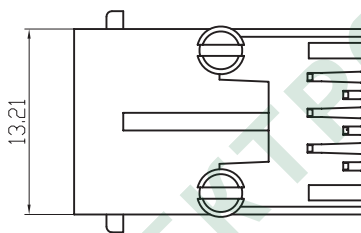

PC Board Layout

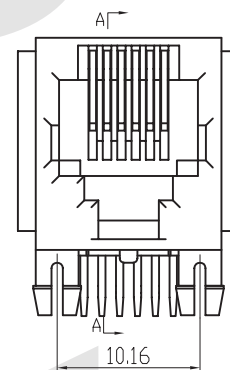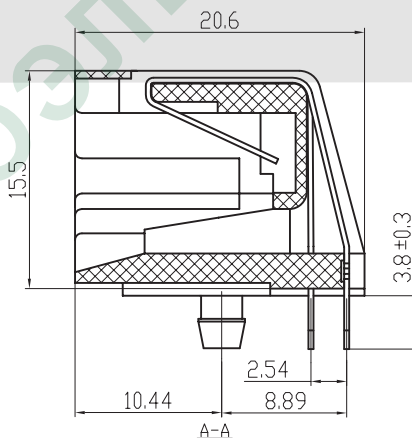

ORDER INFORMATION

KLS12-144 - 6P6C-W-B-XX-X

Part Number	Point NO.	Panel	Part Color	Gold Thickness	Plastic
6P6C	Point	W-With Panel	1-Black	01-Fu"	1-Nylon
6P4C	Point	W/O-Without Panel	2-Gray	02-3u"	2-PBT
6P2C	Point		3-White	03-6u"	3-ABS
			4-IV	04-15u"	
				05-30u"	
				06-50u"	