

TELEPHONE PART

KLS electronic
www.cnkls.com

Modular Plugs Series

KLS12-RJ46-10P10C

MATERIAL



1. Housing :Polycarbonate(pc) UL 94V-0 or UL 94V-2
2. Contact :Phosphor Bronze,Hard Gold plated over nickel
- 3.Shieldinjc:0.25mm Thickness Copper Alloy With Tin plated
- 4.Gold plating:3u inch,6u inch,15u inch,30u inch,50u inch

ELECTRICAL

- 1.Current Rating:1.5 Amps
- 2.Voltage Rating:125 Volts AC
- 3.Insulation Resistance:100 Megohms Min.
- 4.Contact Resistance:39 Millmhos Max.
- 5.Withstanding Voltage:1000VAC RMS 50Hz or 60Hz 1 Min.

MECHANICAL

CABLE TO PLUG TENSILE STRENGTH:7.7Kg MINI
DURABILITY:750MATING CYCLES MINI
WORKING TEMPERATURE:-40°C ~60°C

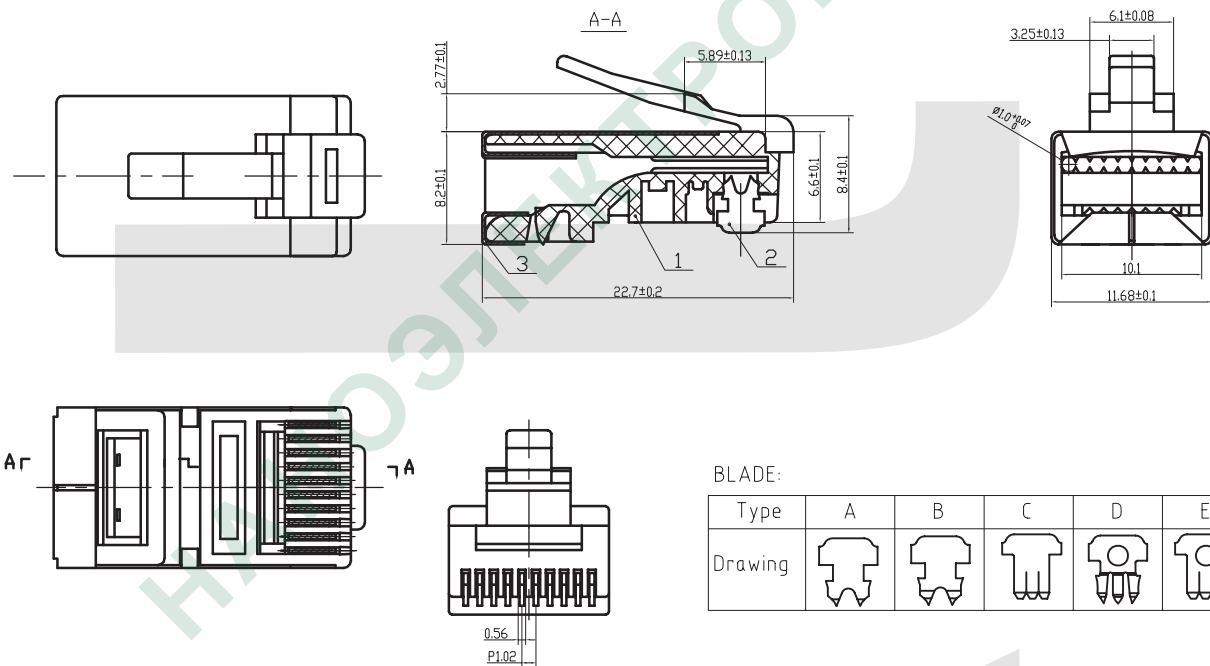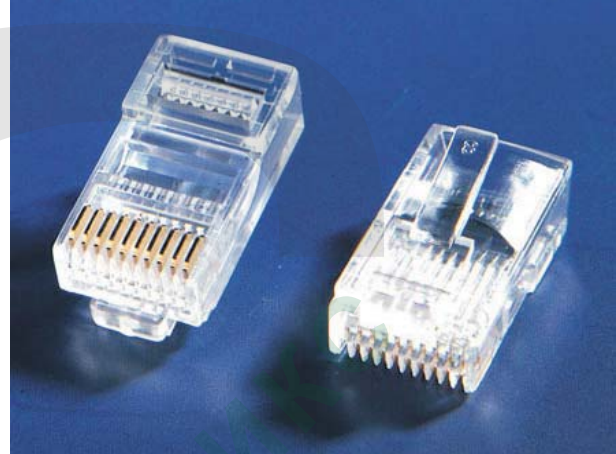

BLADE:

Type	A	B	C	D	E
Drawing					

ORDER INFORMATION

KLS12-RJ46- 10P10C XX - X X X X

Part Number

Point NO.	Gold Thickness	Blade style	Color	Shielded	Shell
10P10C Point 10P8C Point 10P6C Point 10P4C Point	01-Fu" 02-3u" 03-6u" 04-15u" 05-30u" 06-50u	1=A Type 2=B Type 3=C Type 4=D Type 5=E Type	Transparent or other	0=No shielded 1=With shielded	1=Steel 2=Copper shell

All specification & dimensions are subject to change,please call your nearest KLS sales representative for update information