НАНОЭЛЕКТРОНИКС
ISO9001 www.nanoelec.ru

KLS electronic
www.cnkls.com

Tact Switch Series

KLS7-TS6601 6x6 Tact Switch Series

ELECTRICAL

1.Rating: 50mA 12VDC
2.Contact Resistance : 50mΩ max(initial)
3.Insulation Resistance: 100MΩ(minDC 250V)
4.Dielectric Strength : AC250V(50/60Hz for 1minute)
5.Electrically Life: 100000cycles
6.Environment temperature:-20ºC~+70ºC
7.Operating Force: 180/250(±30gf)
8.Seal temperature:260ºC~ 280ºC

Dimension (unit: mm)

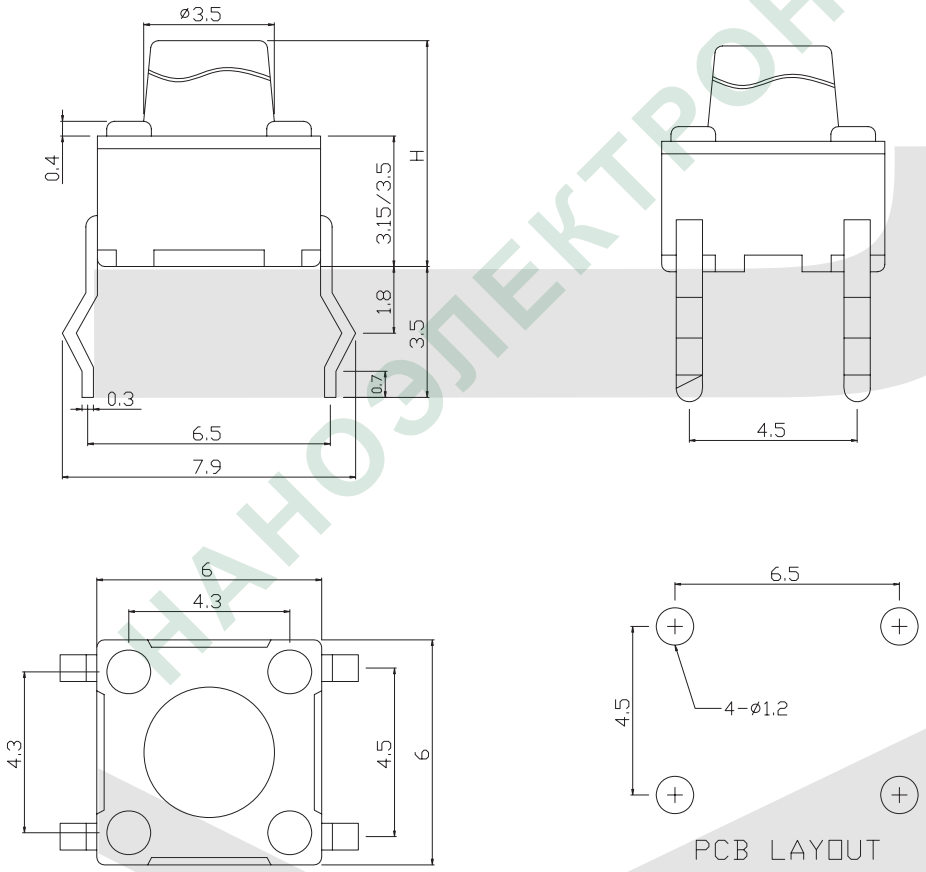

H
4.3
5.0
7.0
7.3
7.5
8.0
9.5
11.0
12.0
13.0
15.0
17.0
18.0
20.0
22.0
26.0

ORDER INFORMATION

KLS7-TS6601 - 4.3 -180

- TS6601: Series No.
- 4.3: Hight: 4.3mm/5.0mm/7.0mm/7.3mm/ 7.5mm/8.0mm/9.5mm/11.0mm/ 12.0mm/13.0mm/15.0mm/17.0mm/ 18.0mm/20mm/22mm/26mm
- 180: Operating Force :180~250gf

НАНОЭЛЕКТРОНИКС