

TERMINAL BLOCK Connector

KLSelectronic
www.cnkls.com

PCB Series

KLS2-125H-3.50/3.81 Series Pitch=3.50mm/3.81mm

Electrical :


Rated voltage: 150V
Rated current: 10A
Contact resistance: 20mΩ
Insulation resistance: 5000MΩ/1000V
Withstanding Voltage: AC2000V/1Min
Wire range: 26-16AWG 1.5mm²

Material

Screws: M2 steel Zinc plated
Contact: Brass, Ni plated
Pin header: Brass, Tin plated
Housing: PA66, UL94V-0

Mechanical

Temp. Range: -40°C~+105°C
MAX Soldering: +250°C for 5 Sec.
Torque: 0.2Nm (1.7 lb.in)
Strip length: 5-6mm

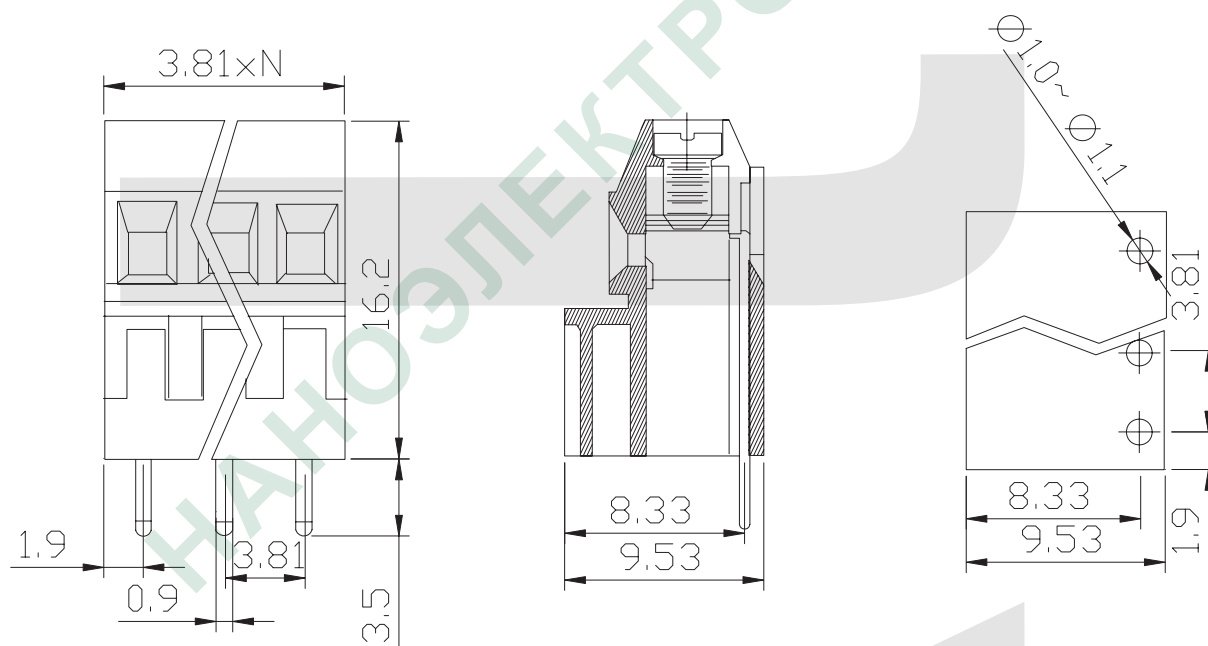

ORDER INFORMATION

Product NO.: KLS2-125H-3.81-XXP X X X

Pos. NO.	Customer Request
Series No.	Screw: C=Cross Screw S=Slot Screw
Pitch: 3.50=3.50mm 3.81=3.81mm	Color: 1=Gray 2=Blue 3=Black 4=Green 5=Orange 6=Red 7=Transparent 8=Yellow 9=White
Number of Pole	

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information