

TERMINAL BLOCK Connector

KLSelectronic
www.cnkls.com

PCB Series

KLS2-150-9.50 Series Pitch=9.50mm

Electrical :



Rated voltage: 300V
Rated current: 30A
Contact resistance: 20mΩ
Insulation resistance: 5000MΩ/1000V
Withstanding Voltage: AC2000V/1Min
Wire range: 26-10AWG 4mm²

Material


Screws: M3 steel Zinc plated
Contact: Brass, Ni plated
Pin header: Brass, Tin plated
Housing: PA66, UL94V-0

Mechanical


Temp. Range: -40°C~+105°C
MAX Soldering: +250°C for 5 Sec.
Torque: 0.5Nm (4.5 lb.in)
Strip length: 6-7mm

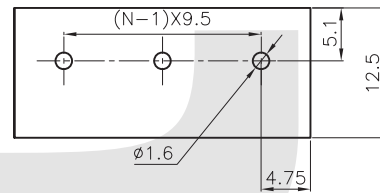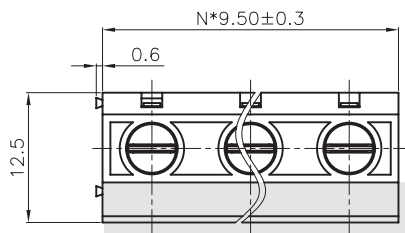

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

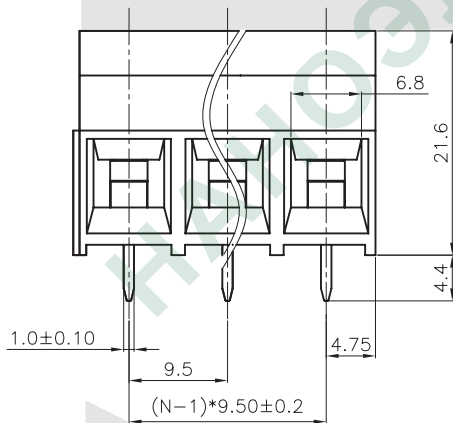

N表示端子的数量

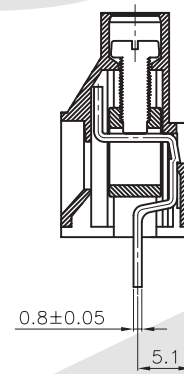

剖面 A-A

ORDER INFORMATION

Product NO.: KLS2-150-9.50-XXP X X X

Pos. NO.

Series No.

Pitch: 9.50=9.50mm

Number of Pole

Customer Request

Screw: C=Cross Screw
S=Slot Screw

Color: 1=Gray 2=Blue 3=Black
4=Green 5=Orange 6=Red
7=Transparent 8=Yellow 9=White

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information