

TERMINAL BLOCK Connector

KLSelectronic
www.cnkls.com

Screwless Series

KLS2-206-5.00/7.50 Series Pitch=5.00mm/7.50mm

Electrical :

Rated voltage: 300V

Rated current: 15A

Contact resistance: 20mΩ

Insulation resistance: 5000MΩ/1000V

Withstanding Voltage: AC2000V/1Min

Wire range: 28-12AWG 2.5MM²

Material

Housing: PA66, UL94V-0


Wire guard: Stainless steel

Pin header: Phosphor bronze, Tin plated

Mechanical

Temp. Range: -40°C~+105°C

Strip length: 5-6mm

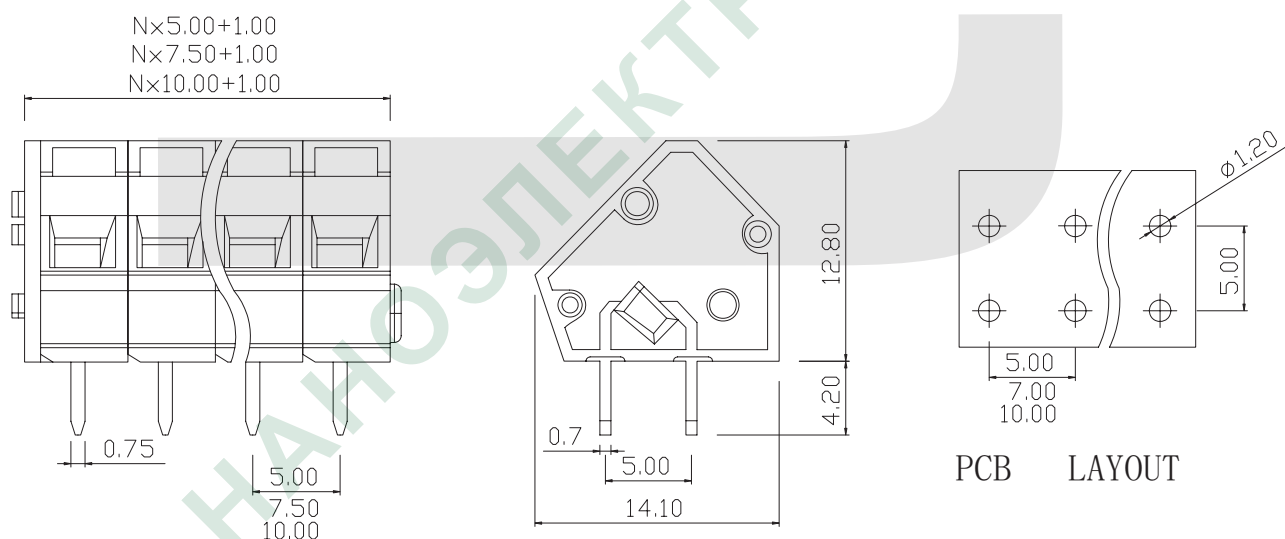

ORDER INFORMATION

Product NO.: KLS2-206-5.00-XXP X X

Pos. NO.

Series No.

Pitch: 5.00=5.00mm 7.50=7.50mm

10.00=10.00mm

Number of Pole

Customer Request

Color: 1=Gray

4=Green

7=Transparent

2=Blue

5=Orange

8=Yellow

3=Black

6=Red

9=White

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information