

## TERMINAL BLOCK Connector

**KLS**electronic  
www.cnkls.com

### PCB Series

KLS2-308V-2.54 Series Pitch=2.54mm

#### Electrical :


Rated voltage: 300V  
Rated current: 6A  
Contact resistance: 20mΩ  
Insulation resistance: 5000MΩ/1000V  
Withstanding Voltage: AC2000V/1Min  
Wire range: 26-18AWG 1.0mm<sup>2</sup>

#### Material

Screws: M1.5 steel Zinc plated  
Contact: Brass, Electroless nickel  
Pin header: Brass, Tin plated  
Housing: PA66, UL94V-0

#### Mechanical

Temp. Range: -40°C~+105°C  
MAX Soldering: +250°C for 5 Sec.  
Torque: 0.15Nm (1.3 lb.in)  
Strip length: 3.7-4.7mm

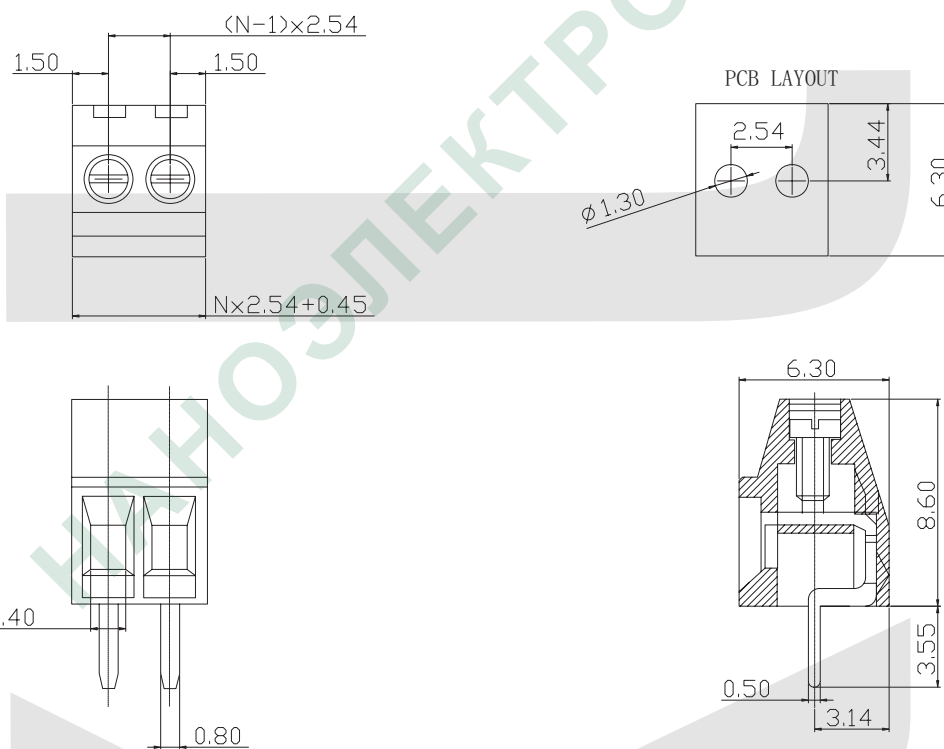

### ORDER INFORMATION

Product No.: KLS2-308V-2.54-XXP-X X-X

|                    |                                                                                          |
|--------------------|------------------------------------------------------------------------------------------|
| Pos. No.           | Customer Request                                                                         |
| Series No.         | Screw: C=Cross Screw<br>S=Slot Screw                                                     |
| Pitch: 2.54=2.54mm | Color: 1=Gray 2=Blue 3=Black<br>4=Green 5=Orange 6=Red<br>7=Transparent 8=Yellow 9=White |
| Number of Pole     |                                                                                          |

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information