

TERMINAL BLOCK Connector



PCB Series

KLS2-333K-3.50 Series Pitch=3.50mm

Electrical:

Rated voltage: 300VRated current: 10AContact resistance: $20m\Omega$ Insulation resistance: $5000M\Omega/1000V$ Withstanding Voltage: AC2000V/1Min Wire range: 28-18AWG $1.0mm^2$

Material

Screws: M2 steel Zinc plated

 $Reed: Phosphor\ Bronze\ , Electroless\ nickel$


Pin header: Brass, Tin plated Housing: PBT, UL94V-0

Mechanical

Temp. Range:-40°C~+105°C MAX Soldering: +250°C for 5 Sec.

Torque: 0.2Nm (1.7 lb.in) Strip length: 4.5-5mm



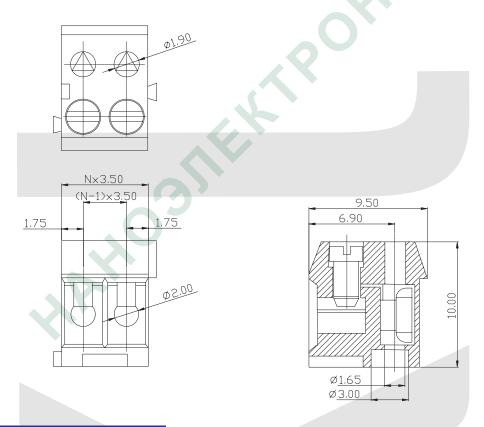

ORDER INFORMATION



