

TERMINAL BLOCK Connector

KLS electronic
www.cnkls.com

PCB Series

KLS2-350R-3.50/3.96 Series Pitch=3.50mm/3.96mm

Electrical :


Rated voltage: 300V
Rated current: 10A
Contact resistance: 20mΩ
Insulation resistance: 5000MΩ/1000V
Withstanding Voltage: AC1500V/1Min
Wire range: 24-18AWG 2.5mm²

Material

Screws: M2.5 steel Zinc plated
Wire guard: phosphor bronze Ni plated or stainless steel
Pin header: Brass, Tin plated
Housing: PA66, UL94V-0

Mechanical

Temp. Range: -30°C~+120°C
MAX Soldering: +250°C for 5 Sec.
Torque: 0.5Nm (4.5lb.in)
Strip length: 4.5-5mm

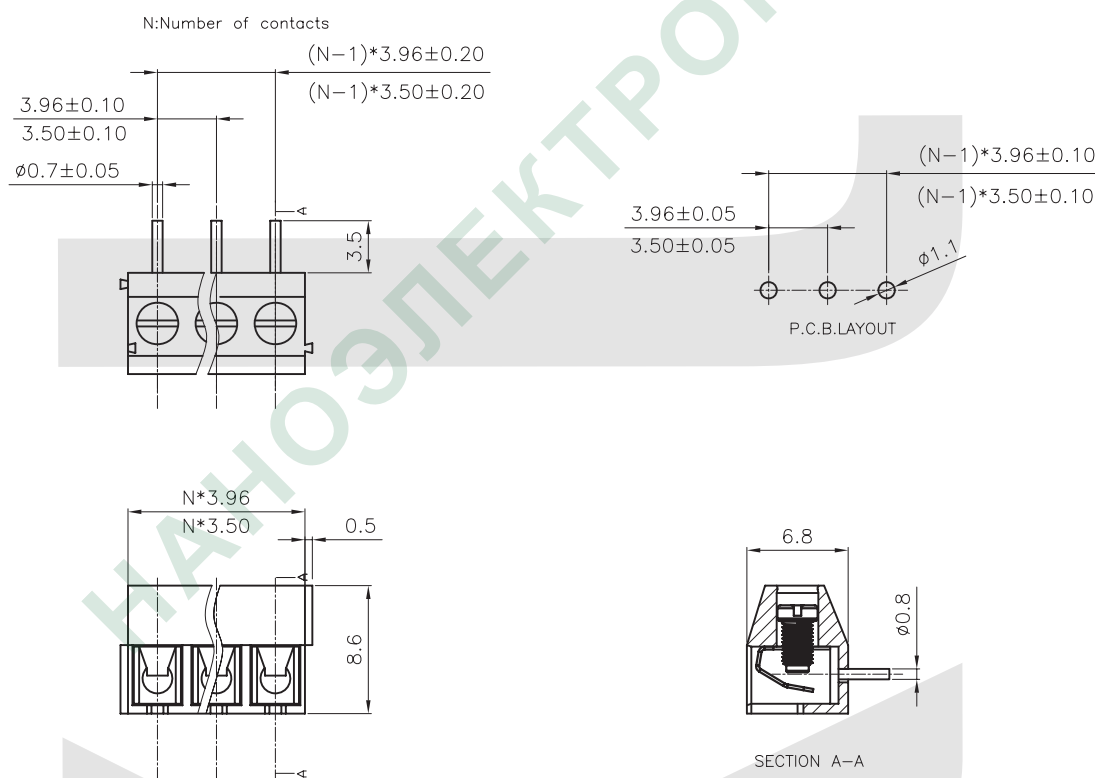

ORDER INFORMATION

Product NO.: KLS2-350R-3.50-XXP X X X

Pos. NO.

Series No.

Pitch: 3.50=3.50mm 3.96=3.96mm

Number of Pole

Customer Request

Screw: C=Cross Screw

S=Slot Screw

Color: 1=Gray

4=Green

7=Transparent

2=Blue

5=Orange

8=Yellow

3=Black

6=Red

9=White

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information