

TERMINAL BLOCK Connector

KLSelectronic
www.cnkls.com

Barrier Series



KLS2-56B-6.35 Series

Electrical

Voltage rating : 300VAC
Current rating : 10Amps/way max.
Wire range : 16-22AWG
Operation temperature : -40°C to +105°C
Torque : 4kg/cm
Insulation Resistance: 500MΩ/DC500V
Withstanding Voltage: AC2000V/Min

MATERIAL

Housing : PA 66 UL94V-0
Terminal : Brass 0.8t, Tin plated
Screws : M2.5 Steel, Nickel Plated

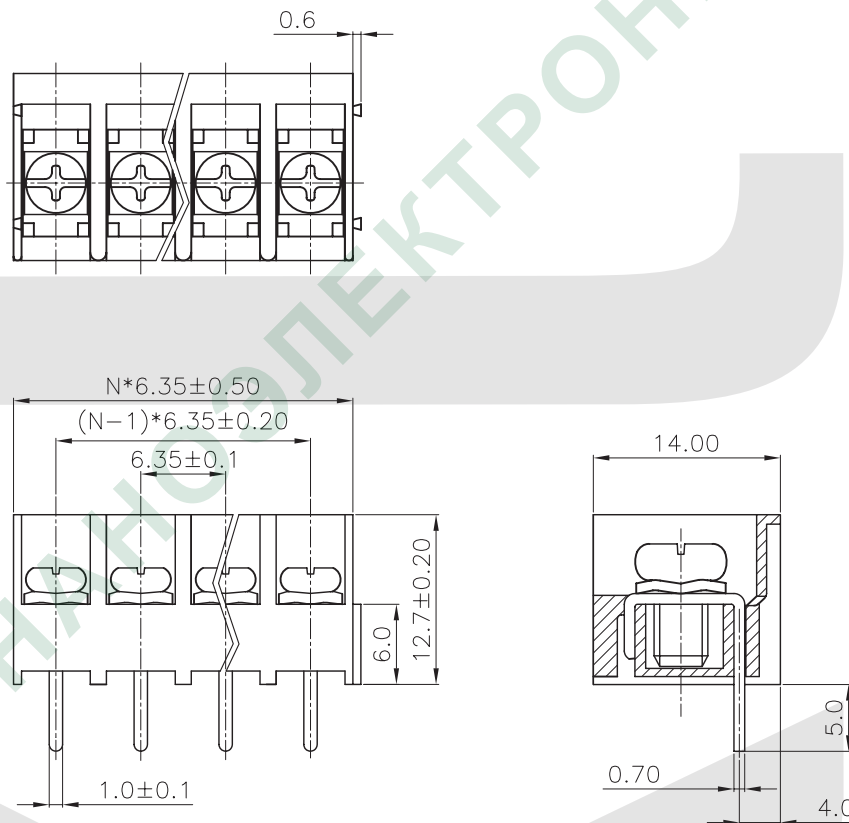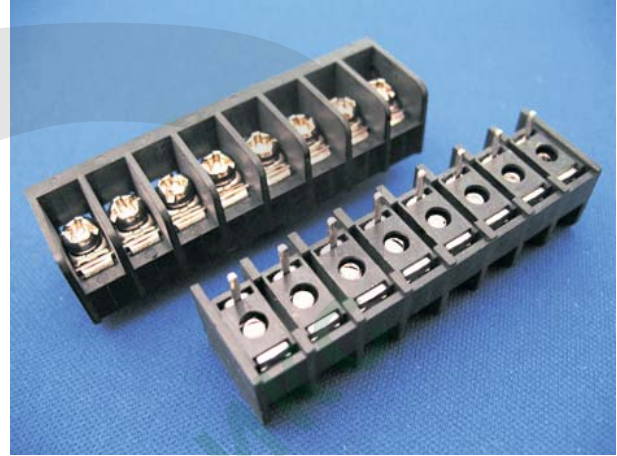

ORDER INFORMATION

Product NO.: KLS2-56B-6.35 XXP X X

Pos. NO. _____
Series No. _____
Pitch 6.35=6.35mm _____

C=With cover D=Without cover
A=Mount Ends B=Barrier Ends
Pin Number _____