

TERMINAL BLOCK Connector

KLSelectronic
www.cnkls.com

Pluggable Series

KLS2-EDCD-3.50/3.81 Series Pitch=3.50mm/3.81mm

Electrical :


Rated voltage: 300V
Rated current: 8A
Contact resistance: 20mΩ
Insulation resistance: 5000MΩ/1000V
Withstanding Voltage: AC1500V/1Min

Material

Housing: PBT, UL94V-0
Screws: M2, steel, Zinc plated
Contact: Phosphor Bronze

Mechanical

Temp. Range: -30°C~+120°C
MAX Soldering: +250°C for 5 Sec
Wire range: 28-16AWG 1.5mm²
Torque: 0.2Nm(1.7Lb.in)
Strip length: 6-7mm

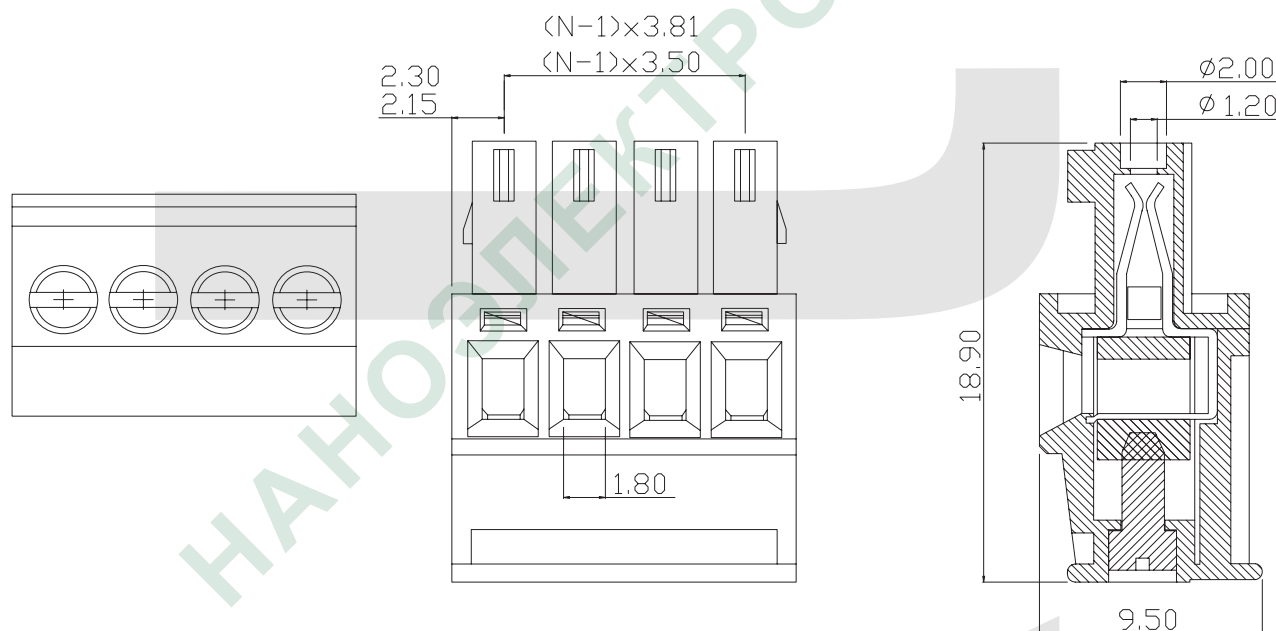

ORDER INFORMATION

Product NO.: KLS2-EDCD-3.50-XXP X X X

Pos. NO.

Series No.

Pitch: 3.50=3.50mm 3.81=3.81mm

Number of Pole

Customer Request

Screw: C=Cross Screw
S=Slot Screw

Color: 1=Gray 2=Blue 3=Black
4=Green 5=Orange 6=Red
7=Transparent 8=Yellow 9=White

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information