

TERMINAL BLOCK Connector

KLSelectronic
www.cnkls.com

Pluggable Series

KLS2-EDCDM-3.50/3.81 Series Pitch=3.50mm/3.81mm

Electrical :


Rated voltage: 300V
Rated current: 8A
Contact resistance: 20mΩ
Insulation resistance: 5000MΩ/1000V
Withstanding Voltage: AC2000V/1Min

Material

Pin header: Brass, Tin plated
Housing: PA66, UL94V-0

Mechanical

Temp. Range: -40°C~+105°C
MAX Soldering: +250°C for 5 Sec

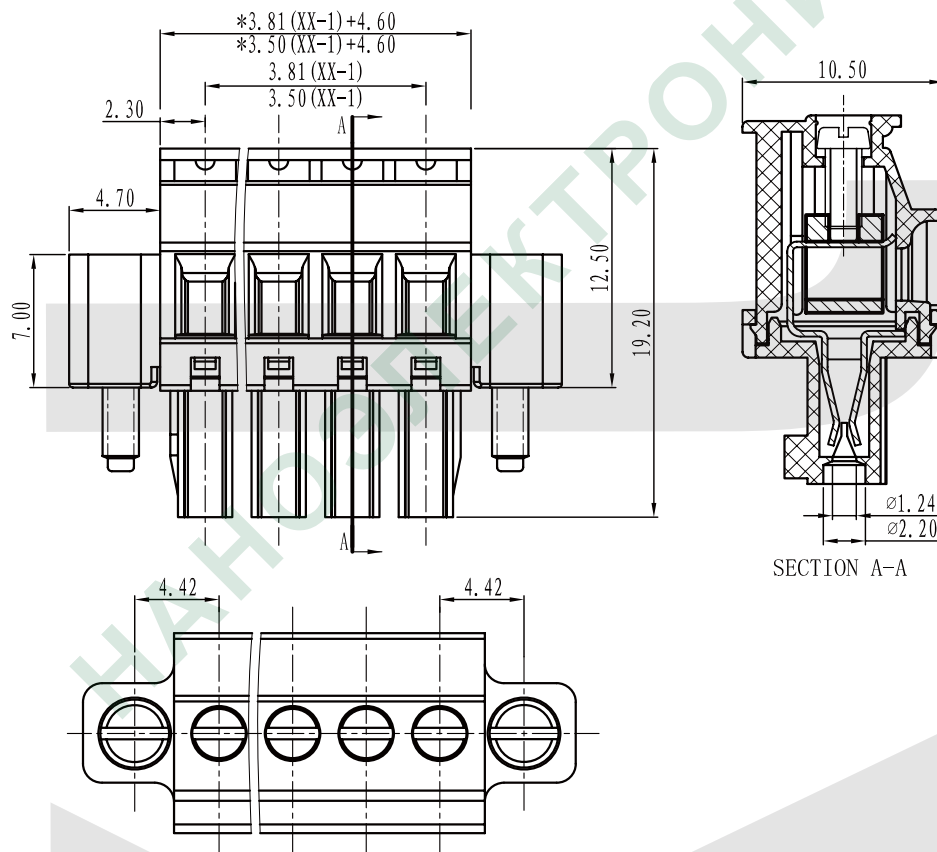

ORDER INFORMATION

Product NO.: KLS2-EDCDM-3.50-XXP X X X

Pos. NO.

Series No.

Pitch: 3.50=3.50mm 3.81=3.81mm

Number of Pole

Customer Request

Screw: C=Cross Screw
S=Slot Screw

Color: 1=Gray 2=Blue 3=Black
4=Green 5=Orange 6=Red
7=Transparent 8=Yellow 9=White

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information