

TERMINAL BLOCK Connector

KLSelectronic
www.cnkls.com

Pluggable Series

KLS2-EDKB-5.00/5.08 Series Pitch=5.00mm/5.08mm

Electrical :



Rated voltage: 300V
Rated current: 15A
Contact resistance: 20mΩ
Insulation resistance: 5000MΩ/1000V
Withstanding Voltage: AC1500V/1Min

Material


Housing: Pa66, UL94V-0
Screws: M2.5, steel, Zinc plated
Contact : Phosphor Bronze

Mechanical

Temp. Range: -40°C~+105°C
MAX Soldering: +250°C for 5 Sec
Wire range: 28-12AWG 2.5mm²
Torque: 0.4Nm (3.6Lb. in)
Strip length: 7-8 mm

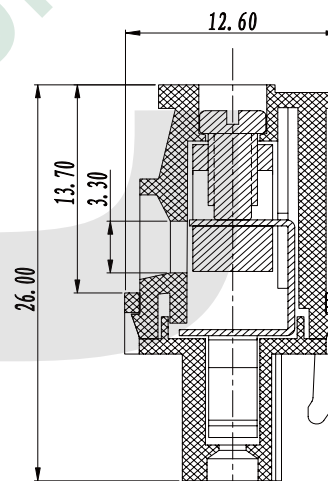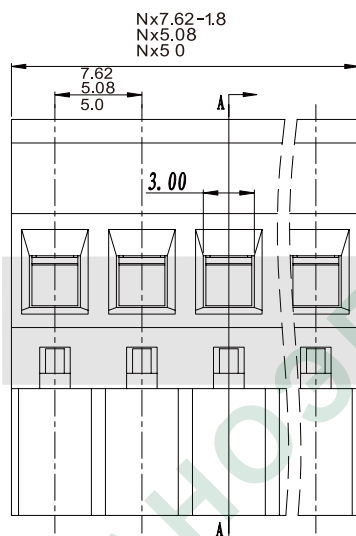

SECTION A-A

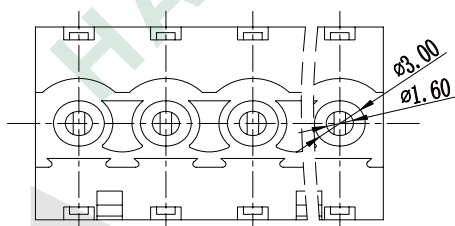

ORDER INFORMATION

Product NO.: KLS2-EDKB-5.00-XXP X X X

Pos. NO.

Series No.

Pitch: 5.00=5.00mm 5.08=5.08mm
7.62=7.62mm

Number of Pole

Customer Request

Screw: C=Cross Screw
S=Slot Screw

Color: 1=Gray 2=Blue 3=Black
4=Green 5=Orange 6=Red
7=Transparent 8=Yellow 9=White

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information