

TERMINAL BLOCK Connector

KLSelectronic
www.cnkls.com

Pluggable Series

KLS2-EDKC-5.08/5.00 Series Pitch=5.08mm/5.00mm

Electrical :

Rated voltage: 300V
Rated current: 15A
Contact resistance: 20mΩ
Insulation resistance: 5000MΩ/1000V
Withstanding Voltage: AC1500V/1Min

Material


Housing: PA66, UL94V-0
Screws: M2.5, steel, Zinc plated
Contact: Phosphor Bronze

Mechanical

Temp. Range: -40°C~+105°C
MAX Soldering: +250°C for 5 Sec
Wire range: 28-12AWG 2.5mm²
Torque: 0.4Nm(3.6Lb.in)
Strip length: 7-8mm



II

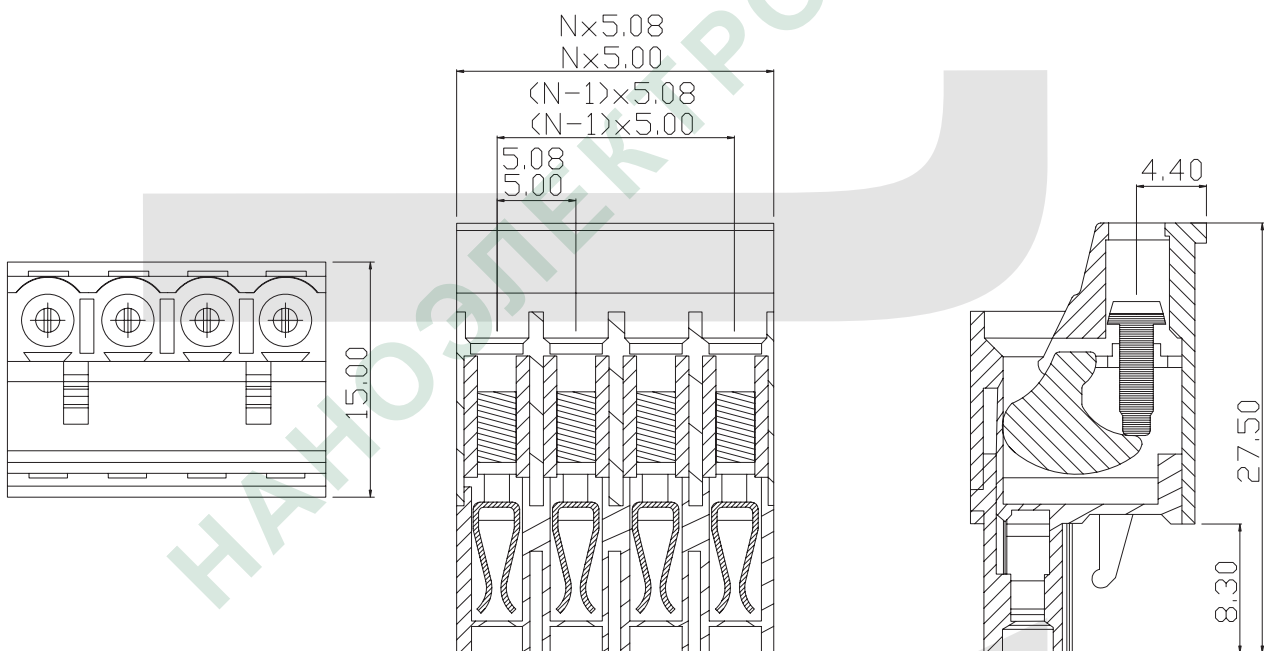

ORDER INFORMATION

Product NO.: KLS2-EDKC-5.00-XXP X X X

Pos. NO.	_____	Customer Request
Series No.	_____	Screw: C=Cross Screw S=Slot Screw
Pitch: 5.00=5.00mm 5.08=5.08mm	_____	Color: 1=Gray 2=Blue 3=Black 4=Green 5=Orange 6=Red 7=Transparent 8=Yellow 9=White
Number of Pole	_____	

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information