

TERMINAL BLOCK Connector

KLSelectronic
www.cnkls.com

Fuse Series

KLS2-510EW Series

Electrical :




Rated voltage: 250V
Rated current: 10A
Contact resistance: 20mΩ
Insulation resistance: 5000MΩ/1000V
Withstanding Voltage: AC2500V/1Min
Wire range: 18-12AWG 2.5mm²

Material

Screws: M3 steel Zinc plated
Contact: Brass
Pin header: Brass, Ni plated
Housing: PA66, UL94V-0

Mechanical

Temp. Range: -40°C~+105°C
MAX Soldering: +250°C for 5 Sec.
Torque: 0.5Nm (4.5lb.in)
Strip length: 7-8mm

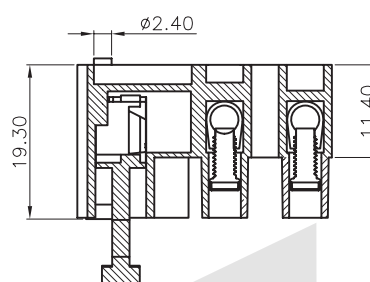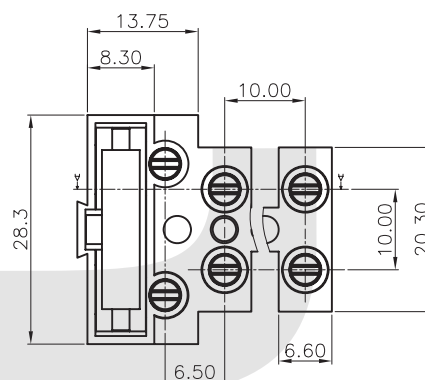

SECTION A-A

ORDER INFORMATION

Product NO.: KLS2-510 E W-3P

Pos. NO. _____ 3P= Pins or 1P 2P 3P 4P 5P
Series No. _____
E=With earth screw hole _____ W=With wire protection