



# Switch

## Standard Vertical Push Switch Series


### KLS7-P5.8X5.8 Standard Vertical Push Switch Series

#### ELECTRICAL

- Rating :DC30V 0.1A
- Insulation Resistance :>100MΩ DC125V
- Withstand Voltage :AC 125V 1 minute
- Contact Resistance :<100mΩ
- Soldering Temper :250°C max.3sec
- Mechanical Life :100,000 cycles
- Electrical Life :10,000 cycles
- Ambient Temper.Used :-25°C to +65°C
- Ambient Humidity Used :<85% RH
- Operating force :150±80 gf

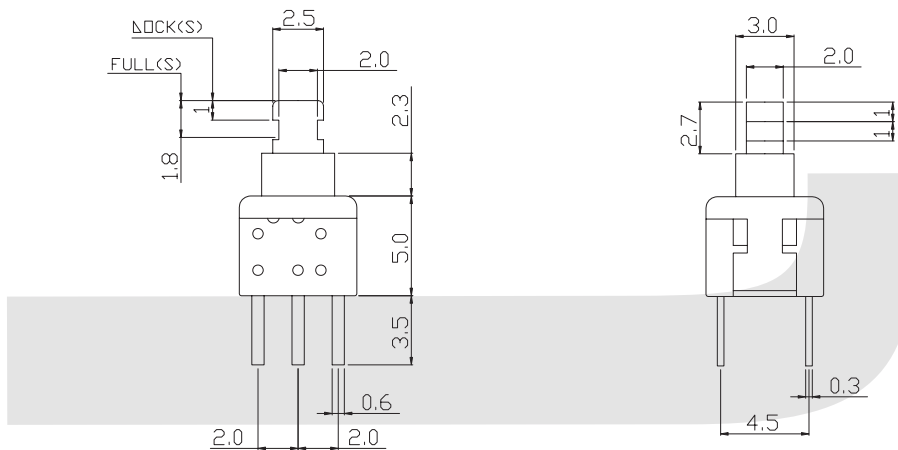

#### SCHEMATIC



## ORDER INFORMATION


**KLS7-P5.8x5.8 X**  
 Part Number —————  
 Standard Vertical Push Switch Series ————— 0=Non Lock 1=lock

## Standard Vertical Push Switch Series


KLS7-P7.0X7.0 Standard Vertical Push Switch Series

### ELECTRICAL


- Rating :DC30V 0.1A
- Insulation Resistance :>100MΩ DC125V
- Withstand Voltage :AC 125V 1 minute
- Contact Resistance :<100mΩ
- Soldering Temper :250°C max.3sec
- Mechanical Life :100,000 cycles
- Electrical Life :10,000 cycles
- Ambient Temper.Used :-25°C to +65°C
- Ambient Humidity Used :<85% RH
- Operating force :150±80 gf

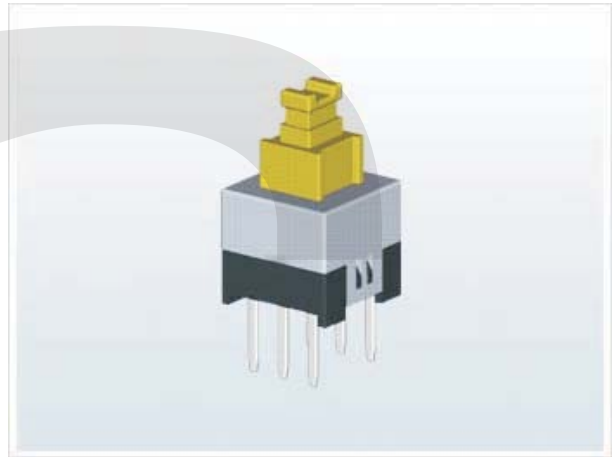


VII

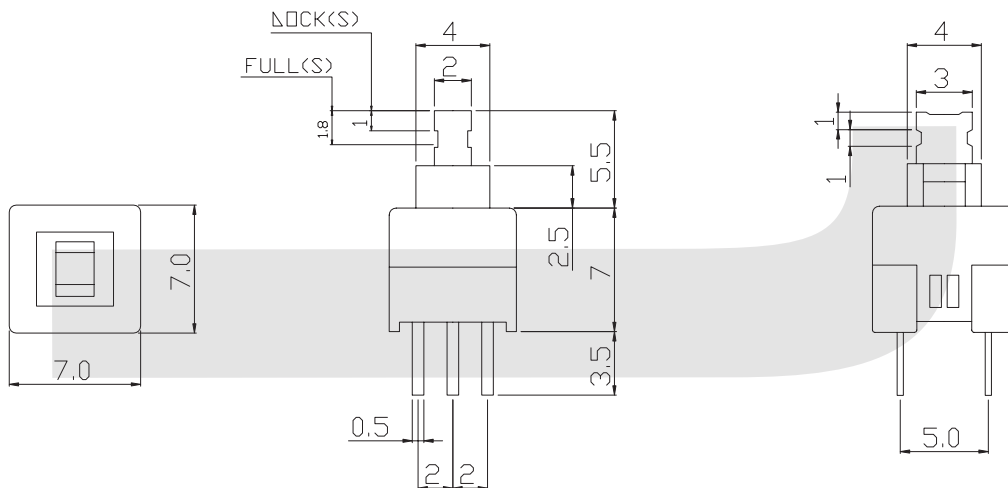


### FREE



### PUSH



### SCHEMATIC



## ORDER INFORMATION

Part Number **KLS7-P7.0x7.0 X**  
 Standard Vertical Push Switch Series  
 0=Non Lock 1=lock


# Switch

## Standard Vertical Push Switch Series


KLS7-P8.0X8.0A Standard Vertical Push Switch Series

### ELECTRICAL


- Rating :DC30V 0.1A
- Insulation Resistance :>100MΩ DC250V
- Withstand Voltage :AC 250V 1 minute
- Contact Resistance :<50mΩ
- Soldering Temper :250°C max.3sec
- Mechanical Life :100,000 cycles
- Electrical Life :10,000 cycles
- Ambient Temper.Used :-25°C to +65°C
- Ambient Humidity Used :<85% RH
- Operating force :160±80 gf

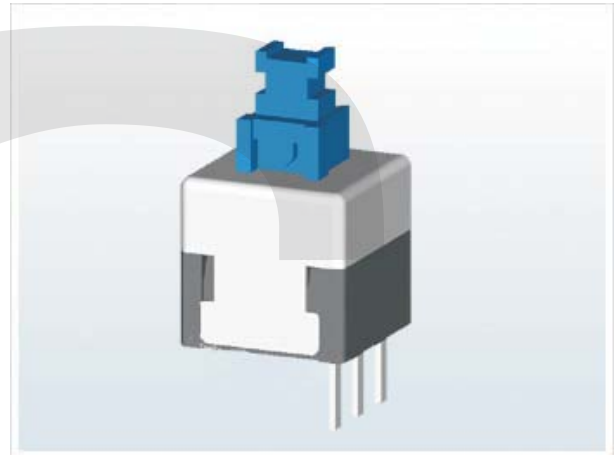


VII

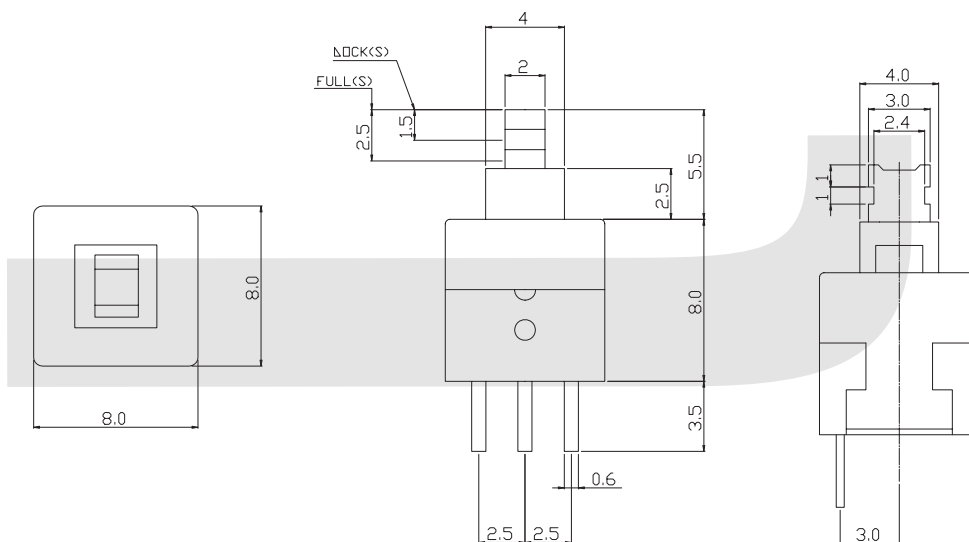


FREE



PUSH



SCHEMATIC



## ORDER INFORMATION

Part Number: **KLS7-P8.0x8.0A X**  
 Standard Vertical Push Switch Series: **X**  
 0=Non Lock 1=Lock

# Switch

## Standard Vertical Push Switch Series


KLS7-P8.0X8.0B Standard Vertical Push Switch Series

### ELECTRICAL


- Rating :DC30V 0.1A
- Insulation Resistance :>100MΩ DC250V
- Withstand Voltage :AC 250V 1 minute
- Contact Resistance :<50mΩ
- Soldering Temper :250°C max.3sec
- Mechanical Life :100,000 cycles
- Electrical Life :10,000 cycles
- Ambient Temper.Used :-25°C to +65°C
- Ambient Humidity Used :<85% RH
- Operating force :160±80 gf




VII

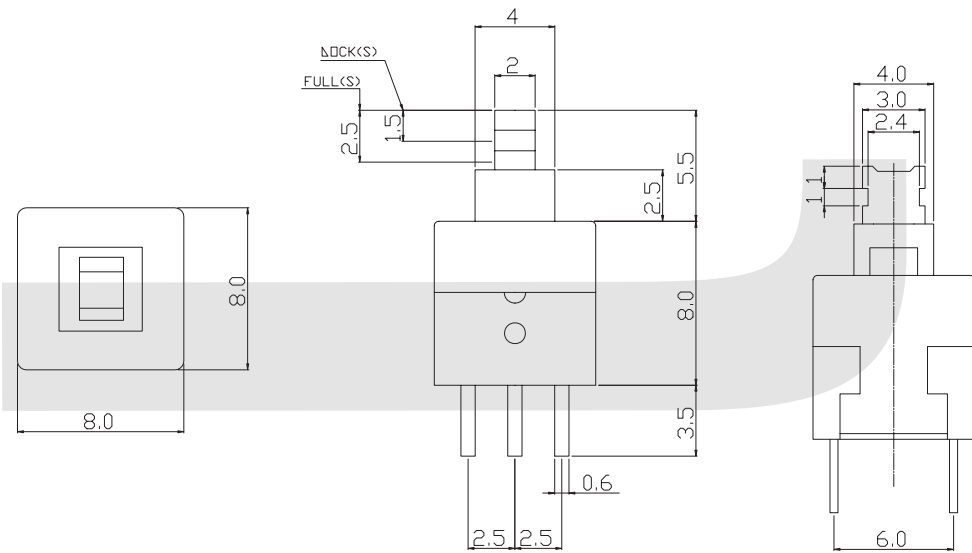


FREE



PUSH



SCHEMATIC



## ORDER INFORMATION

Part Number: **KLS7-P8.0x8.0B X**  
 Standard Vertical Push Switch Series: **X**  
 0=Non Lock 1=Lock

# Switch

## Standard Vertical Push Switch Series


KLS7-P8.0X8.0C Standard Vertical Push Switch Series

### ELECTRICAL


- Rating :DC30V 0.1A
- Insulation Resistance :>100MΩ DC250V
- Withstand Voltage :AC 250V 1 minute
- Contact Resistance :<50mΩ
- Soldering Temper :250°C max.3sec
- Mechanical Life :100,000 cycles
- Electrical Life :10,000 cycles
- Ambient Temper.Used :-25°C to +65°C
- Ambient Humidity Used :<85% RH
- Operating force :160±80 gf




VII

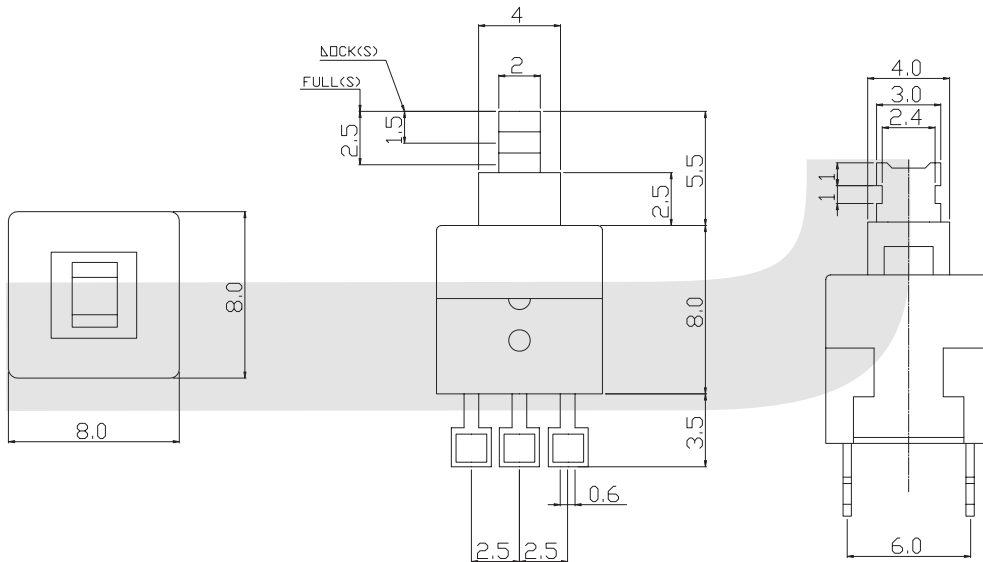


### FREE



### PUSH



### SCHEMATIC



## ORDER INFORMATION

Part Number: **KLS7-P8.0x8.0C X**  
 Standard Vertical Push Switch Series: **X**  
 0=Non Lock 1=Lock


# Switch

## Standard Vertical Push Switch Series


KLS7-P8.5X8.5A Standard Vertical Push Switch Series

### ELECTRICAL


- Rating :DC30V 0.3A , DC1.6V 0.5A
- Insulation Resistance :>100MΩ DC250V
- Withstand Voltage :AC 250V 1 minute
- Contact Resistance :<50mΩ
- Soldering Temper :250°C max.3sec
- Mechanical Life :100,000 cycles
- Electrical Life :10,000 cycles
- Ambient Temper.Used :-25°C to +65°C
- Ambient Humidity Used :<85% RH
- Operating force :200±80 gf

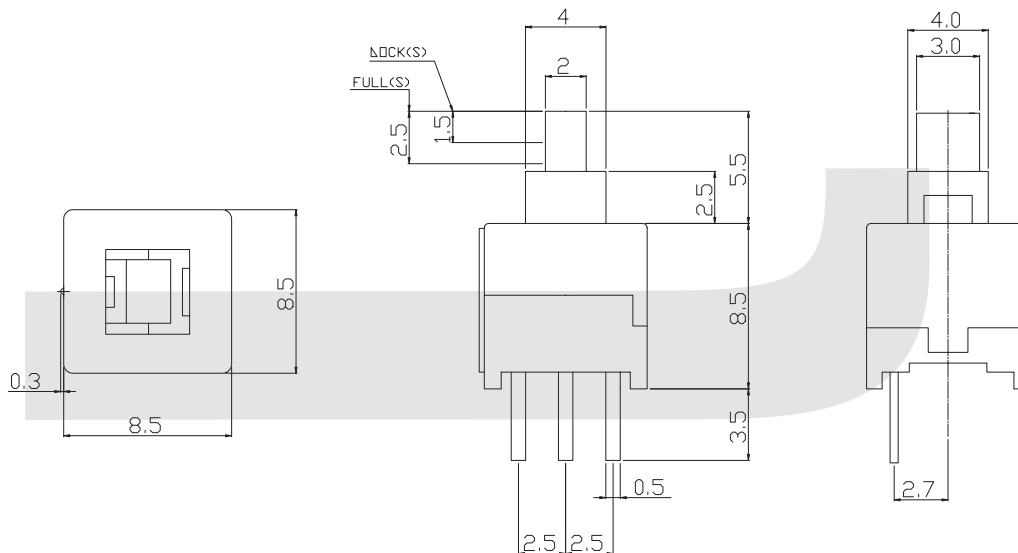


FREE



PUSH



SCHEMATIC



## ORDER INFORMATION

Part Number: **KLS7-P8.5x8.5A X**  
 Standard Vertical Push Switch Series: **X**  
 0=Non Lock 1=Lock


# Switch

## Standard Vertical Push Switch Series


KLS7-P8.5X8.5B Standard Vertical Push Switch Series

### ELECTRICAL


- Rating :DC30V 0.3A , DC1.6V 0.5A
- Insulation Resistance :>100MΩ DC250V
- Withstand Voltage :AC 250V 1 minute
- Contact Resistance :<50mΩ
- Soldering Temper :250°C max.3sec
- Mechanical Life :100,000 cycles
- Electrical Life :10,000 cycles
- Ambient Temper.Used :-25°C to +65°C
- Ambient Humidity Used :<85% RH
- Operating force :200±80 gf

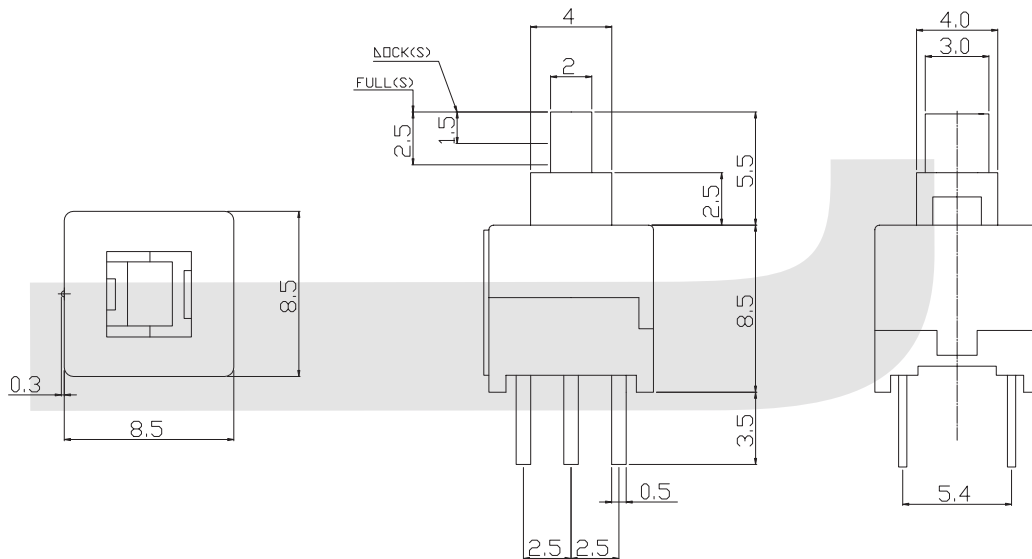


FREE



PUSH



SCHEMATIC



## ORDER INFORMATION

Part Number: **KLS7-P8.5x8.5B X**

Standard Vertical Push Switch Series

0=Non Lock 1=Lock