

Switch

KLSelectronic
www.cnkls.com

Slide Switch Series

KLS7-SS08-13D01 (1P3T) Slide Switch Series

SPECIFICATIONS

Rating: 0.3A 50VDC

Contact Resistance: 50MΩ max





Insulation Resistance: 500VDC 100MΩ Min

Dielectric Strength: 100V AC 1 Minute

Operating Force: 100gf~800gf

Electrical Life : 10,000 cycles

VII

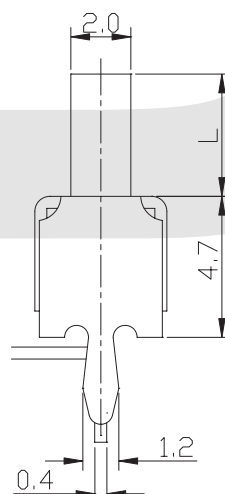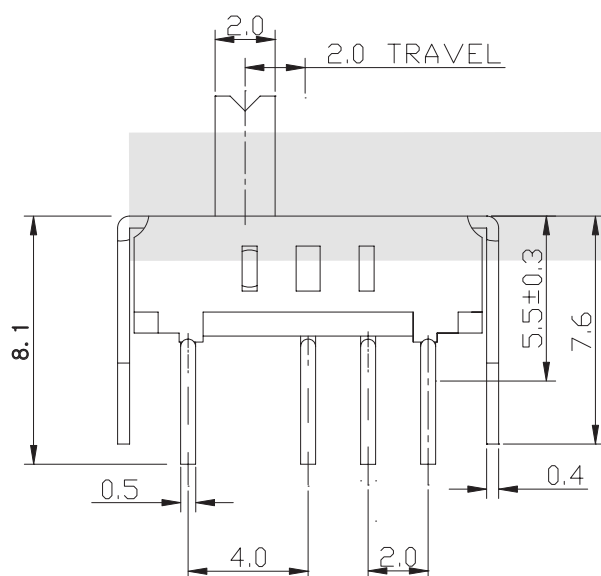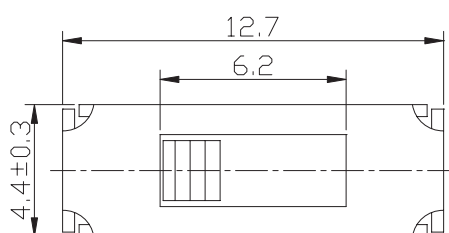

SCHMATIC

ORDER INFORMATION

KLS7-SS08 - 1 3 D 01 - X X - X

Part Number

Slide Switch Type

Pole

Throw

Operating Force

Knobe Height

Sequential No.

Travelling					
C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0

Knob Type					
RG	G	TG	VG	EG	CG




Switch

Slide Switch Series

KLS7-SS09-13F06 (1P3T) Slide Switch Series

SPECIFICATIONS

Rating: 0.5A 50VDC
Contact Resistance: 50MΩ max
Insulation Resistance: 500VDC 100MΩ Min
Dielectric Strength: 100V AC 1 Minute
Operating Force: 100gf~800gf
Electrical Life : 10,000 cycles

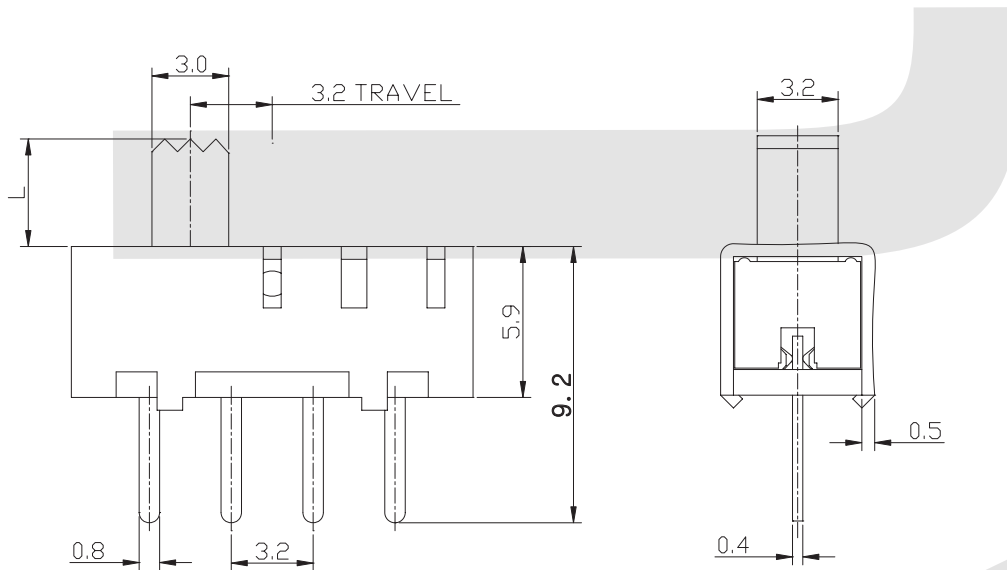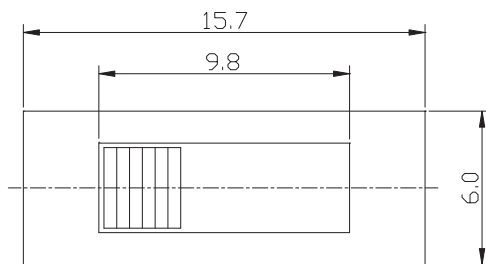

SCHEMATIC

ORDER INFORMATION

KLS7-SS09 - 1 3 F 06 - X X - X

Part Number

Slide Switch Type

Pole

Throw

Operating Force

Knobe Height

Sequential No.

Travelling					
C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0

Knob Type					
RG	G	TG	VG	EG	CG






Switch

Slide Switch Series

KLS7-SS10-13F24 (1P3T) Slide Switch Series

SPECIFICATIONS

Rating: 0.5A 50VDC
Contact Resistance: 50MΩ max
Insulation Resistance: 500VDC 100MΩ Min
Dielectric Strength: 100V AC 1 Minute
Operating Force: 100gf~800gf
Electrical Life : 10,000 cycles

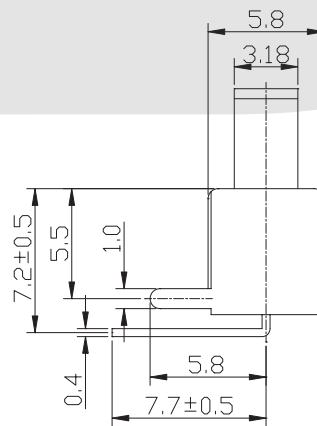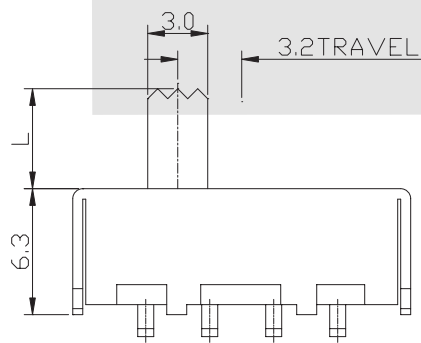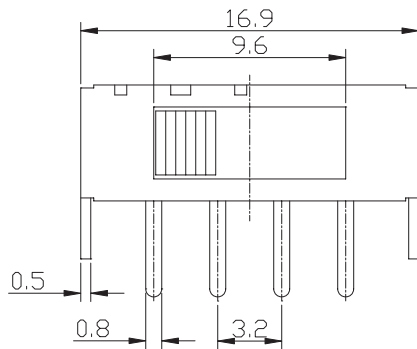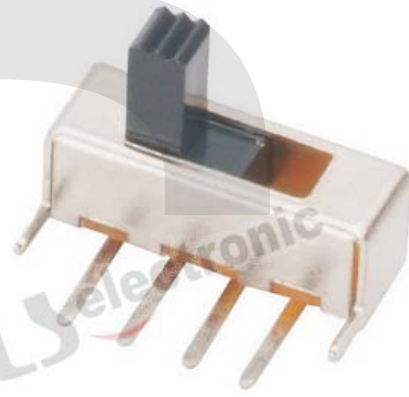

SCHEMATIC

ORDER INFORMATION

KLS7-SS10 - 1 3 F 24 - X X - X

Part Number

Slide Switch Type

Pole

Throw

Operating Force

Knobe Height

Sequential No.

Travelling					
C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0

Knob Type					
RG	G	TG	VG	EG	CG



Switch

Slide Switch Series



KLS7-SK03-13D01 (1P3T) Slide Switch Series

SPECIFICATIONS


Rating: 0.5A 50VDC
Contact Resistance: 30mΩ Max
Insulation Resistance: 500VDC 100MΩ Min
Dielectric Strength: 500V AC 1 Minute
Operating Force: 100gf~800gf
Electrical Life : 10,000 cycles

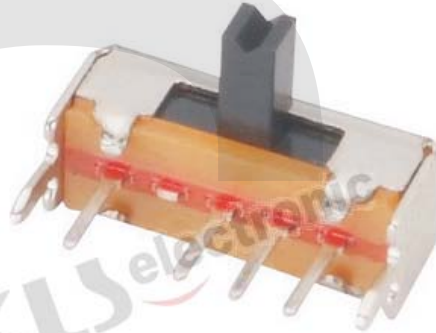

SCHEMATIC



P.C.B. HOLE DETAIL

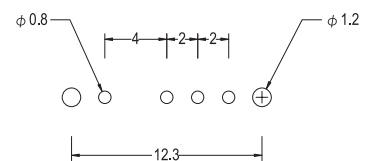

ORDER INFORMATION

KLS7-SK03 - 1 3 D 01 - X X - X

Part Number

Slide Switch Type

Pole

Throw

Operating Force

Knobe Height

Sequential No.

Travelling					
C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0

Knob Type					
RG	G	TG	VG	EG	CG