

Switch

KLS electronic
www.cnkls.com


Slide Switch Series

KLS7-SS40-23D01 (2P3T) Slide Switch Series

SPECIFICATIONS




Rating: 0.3A 50VDC
Contact Resistance: 30mΩ Max
Insulation Resistance: 500VDC 100MΩ Min
Dielectric Strength: 500V AC 1 Minute
Operating Force: 100gf~800gf
Electrical Life : 10,000 cycles

VII




L=2 - 12

SCHEMATIC

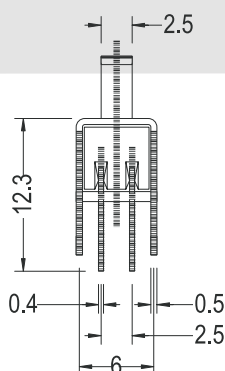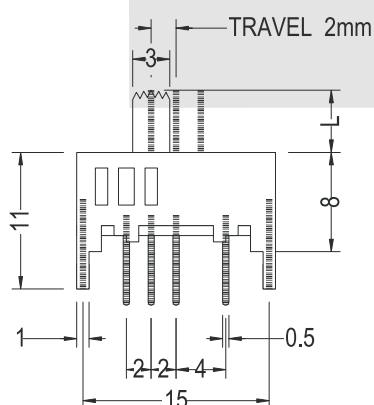

P.C.B. HOLE DETAIL

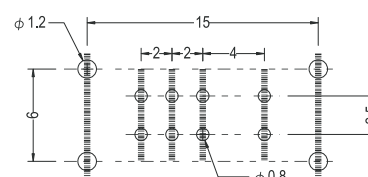

ORDER INFORMATION

KLS7-SS40 - 2 3 D 01 - X X - X

Part Number

Slide Switch Type

Pole

Throw

Operating Force

Knobe Height

Sequential No.

Travelling					
C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0

Knob Type					
RG	G	TG	VG	EG	CG

Switch

Slide Switch Series


KLS7-SS41-23D06 (2P3T) Slide Switch Series

SPECIFICATIONS



Rating: 0.3A 50VDC
Contact Resistance: 30mΩ Max
Insulation Resistance: 500VDC 100MΩ Min
Dielectric Strength: 500V AC 1 Minute
Operating Force: 100gf~800gf
Electrical Life : 10,000 cycles




L=2 - 9



SCHEMATIC

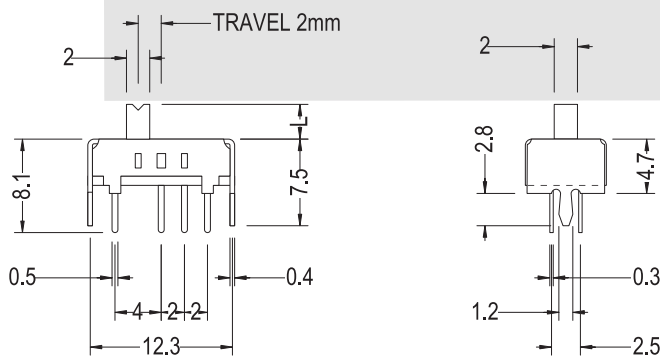

P.C.B. HOLE DETAIL



ORDER INFORMATION

KLS7-SS41 - 2 3 D 06 - X X - X

Part Number

Slide Switch Type

Pole


Throw

Travelling					
C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0

Operating Force

Knobe Height

Sequential No.

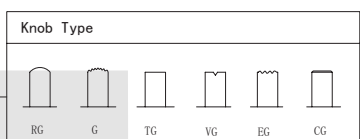

Switch


Slide Switch Series

KLS7-SS42-23D28 (2P3T) Slide Switch Series




SPECIFICATIONS

Rating: 0.3A 50VDC
Contact Resistance: 30mΩ Max
Insulation Resistance: 500VDC 100MΩ Min
Dielectric Strength: 500V AC 1 Minute
Operating Force: 100gf~800gf
Electrical Life : 10,000 cycles


VII



SCHEMATIC

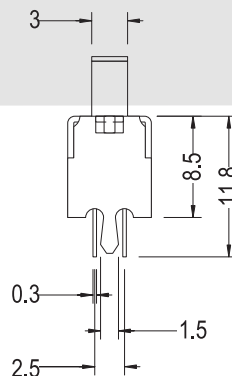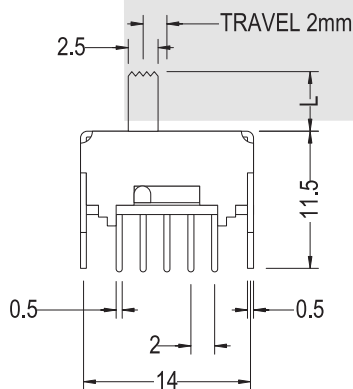

P.C.B. HOLE DETAIL

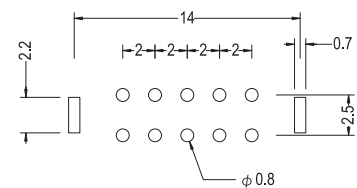

ORDER INFORMATION

KLS7-SS42 - 2 3 D 28 - X X - X

Part Number

Slide Switch Type

Pole

Throw

Operating Force

Knobe Height

Sequential No.

Travelling					
C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0

Knob Type					
RG	G	TG	VG	EG	CG


Switch

Slide Switch Series




KLS7-SS43-23E05 (2P3T) Slide Switch Series

SPECIFICATIONS


Rating: 0.3A 50VDC
Contact Resistance: 30mΩ Max
Insulation Resistance: 500VDC 100MΩ Min
Dielectric Strength: 500V AC 1 Minute
Operating Force: 100gf~800gf
Electrical Life : 10,000 cycles



SCHEMATIC

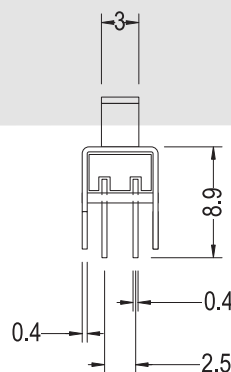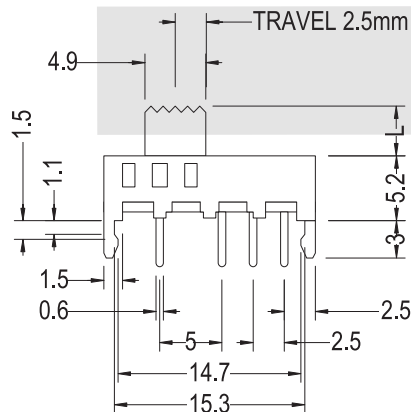

P.C.B. HOLE DETAIL



ORDER INFORMATION

KLS7-SS43 - 2 3 E 05 - X X - X

Part Number

Slide Switch Type

Pole

Throw

Operating Force

Knobe Height

Sequential No.

Travelling					
C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0

Knob Type					
RG	G	TG	VG	EG	CG


Switch

Slide Switch Series

KLS7-SS44-23E30 (2P3T) Slide Switch Series

SPECIFICATIONS


Rating: 1. 5A 250VAC
Contact Resistance: 30mΩ Max
Insulation Resistance: 500VDC 100MΩ Min
Dielectric Strength: 500V AC 1 Minute
Operating Force: 100gf~800gf
Electrical Life : 10,000 cycles

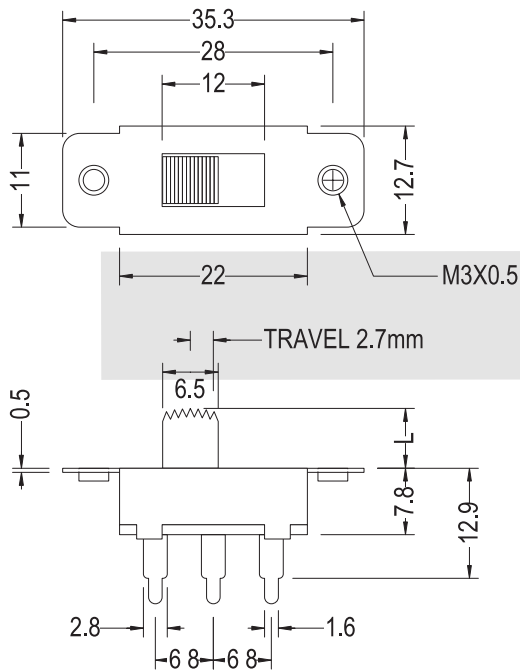

SCHEMATIC



P.C.B. HOLE DETAIL



ORDER INFORMATION

KLS7-SS44 - 2 3 E 30 - X X - X

Part Number

Slide Switch Type

Pole


Throw

Travelling						
C	D	E	F	G	H	
1.5	2.0	2.5	3.0	3.5	4.0	
I	J	K	L	N	P	
4.5	5.0	5.5	6.0	7.0	8.0	

Operating Force

Knobe Height

Sequential No.

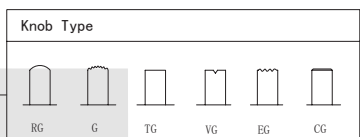

Switch


Slide Switch Series

KLS7-SS45-23F35 (2P3T) Slide Switch Series

SPECIFICATIONS

Rating: 0.5A 50VDC
Contact Resistance: 30mΩ Max
Insulation Resistance: 500VDC 100MΩ Min
Dielectric Strength: 500V AC 1 Minute
Operating Force: 100gf~800gf
Electrical Life : 10,000 cycles

VII

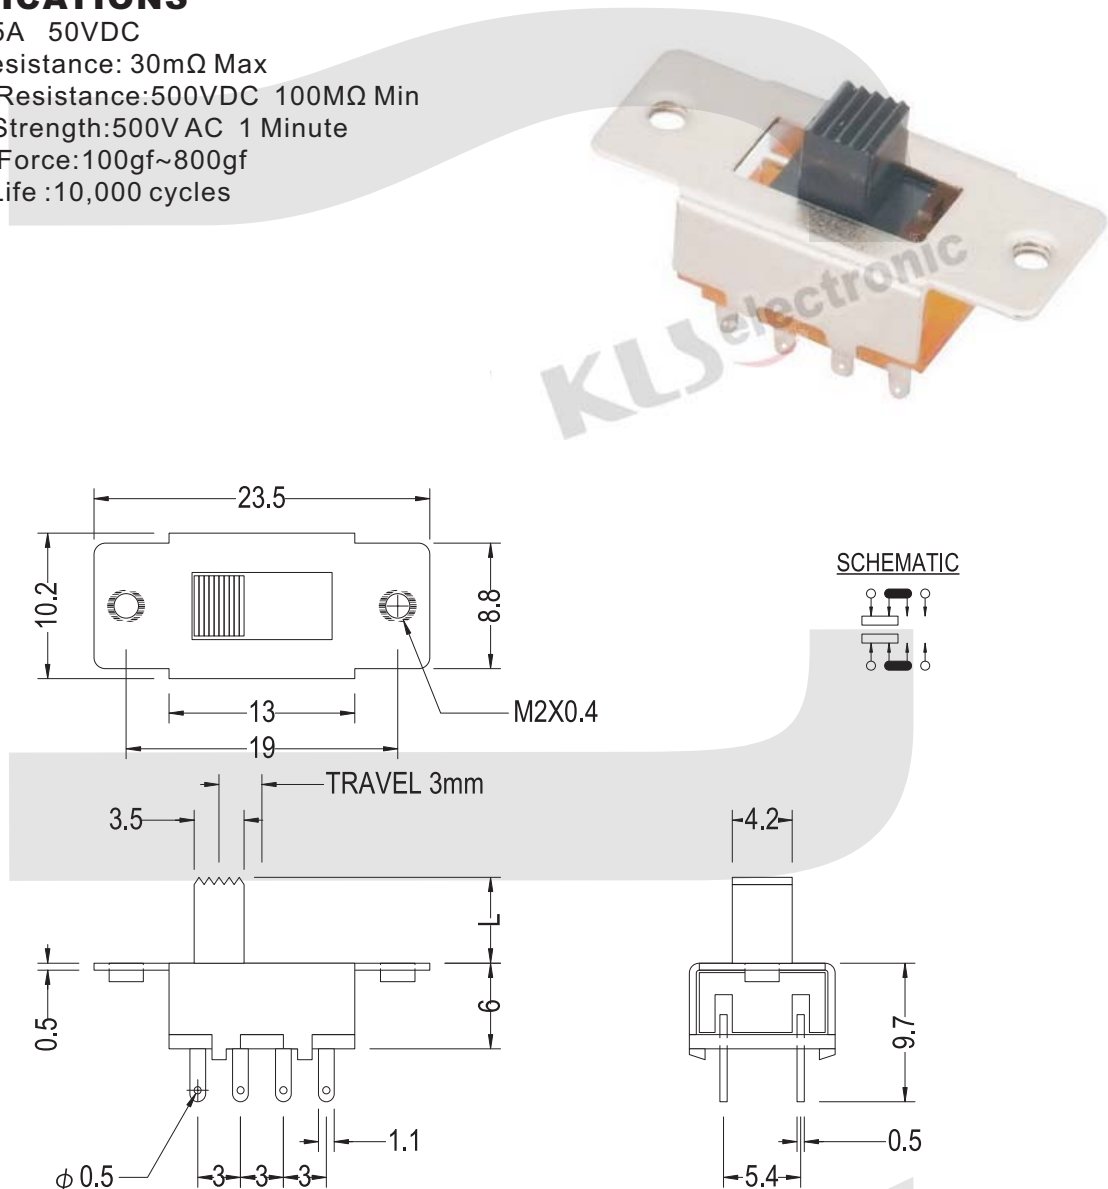

ORDER INFORMATION

Part Number: KLS7-SS45 - 2 3 F 35 - X X - X
Slide Switch Type: 2 3 F 35
Pole: X X
Throw: X

Travelling					
C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0

Operating Force
Knobe Height

Sequential No.

Knob Type					
RG	G	TG	VG	EG	CG

Switch

Slide Switch Series


KLS7-SS46-23H02 (2P3T) Slide Switch Series

SPECIFICATIONS


Rating: 0.5A 50VDC
Contact Resistance: 30mΩ Max
Insulation Resistance: 500VDC 100MΩ Min
Dielectric Strength: 500V AC 1 Minute
Operating Force: 100gf~800gf
Electrical Life : 10,000 cycles




L=4 - 12

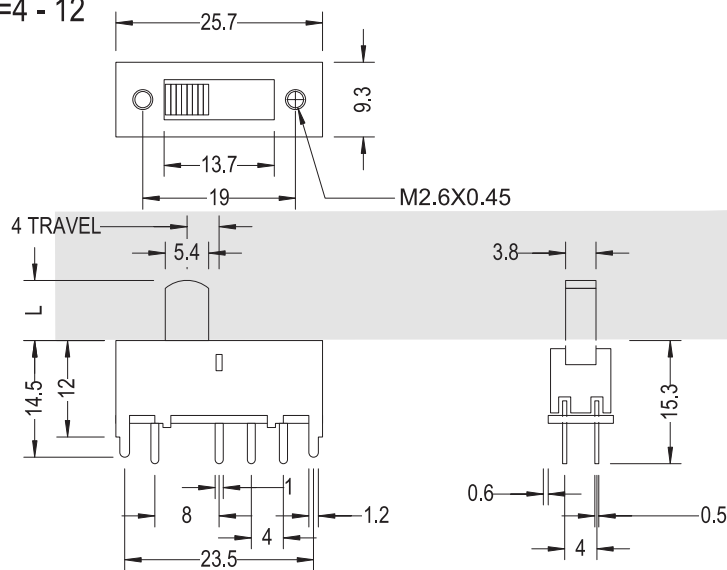

SCHEMATIC



P.C.B. HOLE DETAIL



ORDER INFORMATION

KLS7-SS46 - 2 3 H 02 - X X - X

Part Number

Slide Switch Type

Pole

Throw


Operating Force

Knobe Height

Sequential No.

Travelling					
C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0

Knob Type



Switch

Slide Switch Series


KLS7-SS47-23L03 (2P3T) Slide Switch Series

SPECIFICATIONS


Rating: 3A 250VAC
Contact Resistance: 30mΩ Max
Insulation Resistance: 500VDC 100MΩ Min
Dielectric Strength: 500V AC 1 Minute
Operating Force: 100gf~800gf
Electrical Life : 10,000 cycles



L=5 - 10

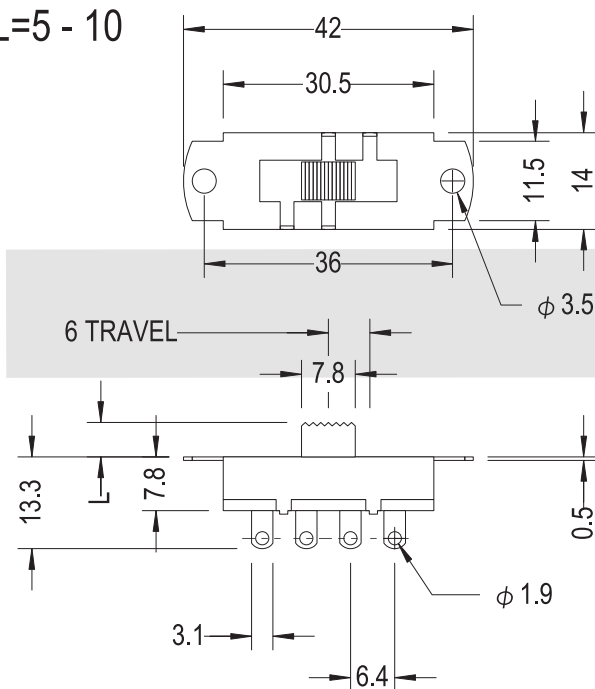

SCHEMATIC



ORDER INFORMATION

KLS7-SS47 - 2 3 L 03 - X X - X

Part Number

Slide Switch Type

Pole

Throw


Operating Force

Knobe Height

Sequential No.

Travelling					
C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0

Knob Type





Switch

Slide Switch Series

KLS7-SK35-23D07 (2P3T) Slide Switch Series




SPECIFICATIONS

Rating: 0.3A 50VDC
Contact Resistance: 30mΩ Max
Insulation Resistance: 500VDC 100MΩ Min
Dielectric Strength: 500V AC 1 Minute
Operating Force: 100gf~800gf
Electrical Life : 10,000 cycles

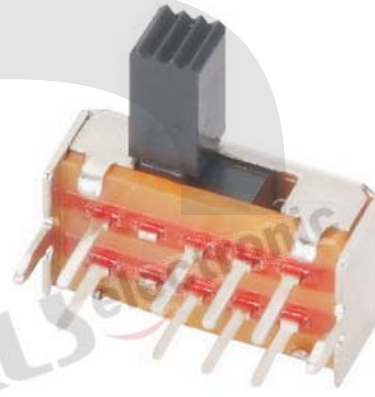


X: 2X2 or 3X3
L: 2,3,4,5,6

SCHEMATIC

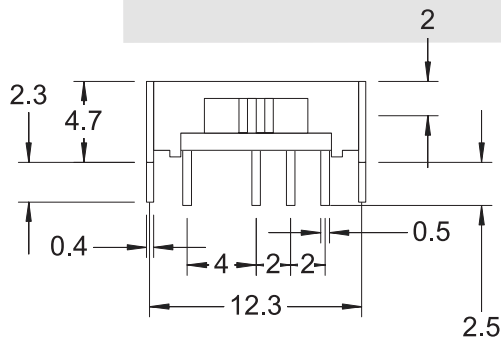

P.C.B. HOLE DETAIL



ORDER INFORMATION

KLS7-SK35 - 2 3 D 07 - X X - X

Part Number

Slide Switch Type

Pole

Throw

Operating Force

Knobe Height

Sequential No.

Travelling					
C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0

Knob Type					
RG	G	TG	VG	EG	CG