

Switch

KLS electronic
www.cnkls.com

Slide Switch Series


KLS7-SS60-24D02 (2P4T) Slide Switch Series

SPECIFICATIONS




Rating: 0.3A 50VDC
Contact Resistance: 30mΩ Max
Insulation Resistance: 500VDC 100MΩ Min
Dielectric Strength: 500V AC 1 Minute
Operating Force: 100gf~800gf
Electrical Life : 10,000 cycles




L=2 - 6



SCHEMATIC

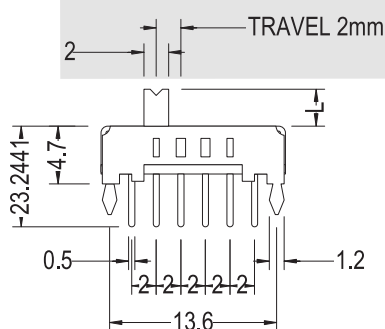

P.C.B. HOLE DETAIL



ORDER INFORMATION

KLS7-SS60 - 2 4 D 02 - X X - X

Part Number

Slide Switch Type

Pole

Throw

Operating Force

Knobe Height

Sequential No.

Travelling					
C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0

Knob Type					
RG	G	TG	VG	EG	CG

Switch

Slide Switch Series


KLS7-SS62-24H03 (2P4T) Slide Switch Series

SPECIFICATIONS


Rating: 0.5A 50VDC
Contact Resistance: 30mΩ Max
Insulation Resistance: 500VDC 100MΩ Min
Dielectric Strength: 500V AC 1 Minute
Operating Force: 100gf~800gf
Electrical Life : 10,000 cycles




L=4 - 12

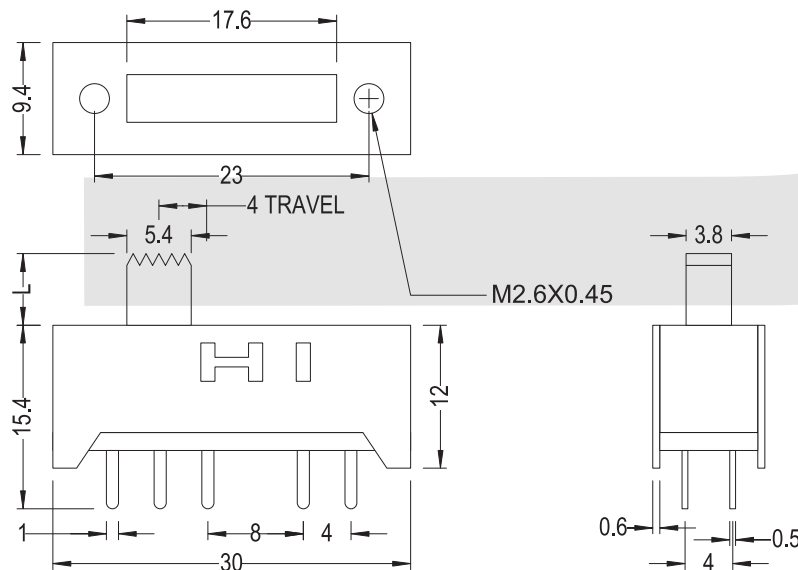

SCHEMATIC



P.C.B. HOLE DETAIL



ORDER INFORMATION

KLS7-SS62 - 2 4 H 03 - X X - X

Part Number

Slide Switch Type

Pole

Throw


Operating Force

Knobe Height

Sequential No.

Travelling					
C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0

Knob Type



Switch

Slide Switch Series


KLS7-SS63-24N01 (2P4T) Slide Switch Series

SPECIFICATIONS



Rating: 3A 250VAC
Contact Resistance: 30mΩ Max
Insulation Resistance: 500VDC 100MΩ Min
Dielectric Strength: 500V AC 1 Minute
Operating Force: 100gf~800gf
Electrical Life : 10,000 cycles



L=5 - 10

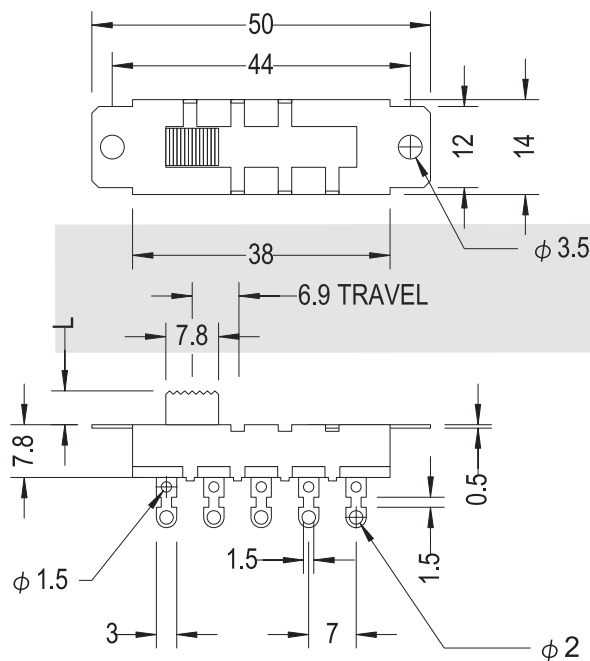

SCHEMATIC



ORDER INFORMATION

KLS7-SS63 - 2 4 N 01 - X X - X

Part Number

Slide Switch Type

Pole

Throw


Operating Force

Knobe Height

Sequential No.

Travelling					
C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0

Knob Type



Switch

Slide Switch Series



KLS7-SS61-24E01 (2P4T) Slide Switch Series

SPECIFICATIONS


Rating: 0.3A 50VDC
Contact Resistance: 30mΩ Max
Insulation Resistance: 500VDC 100MΩ Min
Dielectric Strength: 500V AC 1 Minute
Operating Force: 100gf~800gf
Electrical Life : 10,000 cycles




L=3 - 11

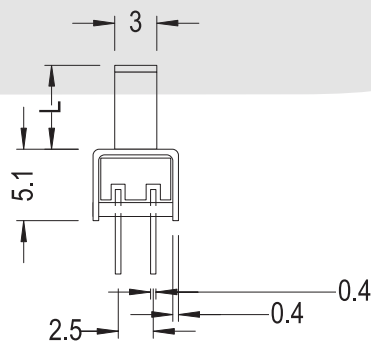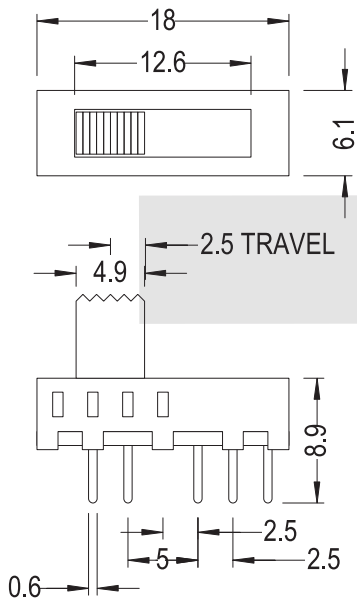

SCHEMATIC



P.C.B. HOLE DETAIL



ORDER INFORMATION

KLS7-SS61 - 2 4 E 01 - X X - X

Part Number

Slide Switch Type

Pole

Throw


Operating Force

Knobe Height

Sequential No.

Travelling					
C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0

Knob Type



Switch



Slide Switch Series

KLS7-SK36-24D02 (2P4T) Slide Switch Series


SPECIFICATIONS

Rating: 0.3A 50VDC
Contact Resistance: 30mΩ Max
Insulation Resistance: 500VDC 100MΩ Min
Dielectric Strength: 500V AC 1 Minute
Operating Force: 100gf~800gf
Electrical Life : 10,000 cycles


VII

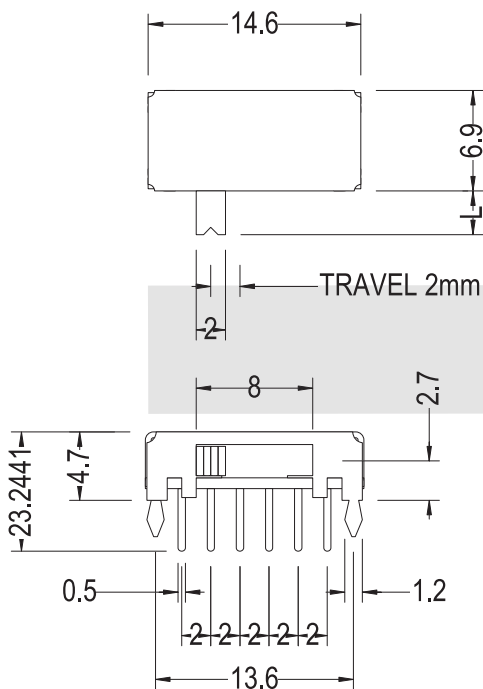

SCHEMATIC



P.C.B. HOLE DETAIL



ORDER INFORMATION

KLS7-SK36 - 2 4 D 02 - X X - X

Part Number

Slide Switch Type

Pole

Throw

Operating Force

Knobe Height

Sequential No.

Travelling					
C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0

Knob Type					
RG	G	TG	VG	EG	CG


Switch

Slide Switch Series




KLS7-SK37-24F01 (2P4T) Slide Switch Series

SPECIFICATIONS


Rating: 0.3A 50VDC
Contact Resistance: 30mΩ Max
Insulation Resistance: 500VDC 100MΩ Min
Dielectric Strength: 500V AC 1 Minute
Operating Force: 100gf~800gf
Electrical Life : 10,000 cycles

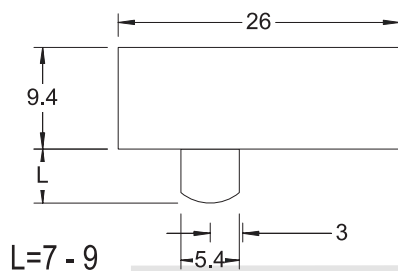

SCHEMATIC

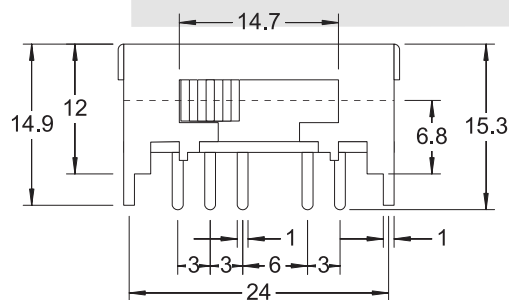

P.C.B. HOLE DETAIL



ORDER INFORMATION

KLS7-SK37 - 2 4 F 01 - X X - X

Part Number

Slide Switch Type

Pole

Throw

Operating Force

Knobe Height

Sequential No.

Travelling					
C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0

Knob Type					
RG	G	TG	VG	EG	CG