

Switch


KLS electronic
www.cnkls.com

Slide Switch Series



KLS7-SS71-42D02 (4P2T) Slide Switch Series

SPECIFICATIONS


Rating: 0.3A 50VDC
Contact Resistance: 30mΩ Max
Insulation Resistance: 500VDC 100MΩ Min
Dielectric Strength: 500V AC 1 Minute
Operating Force: 100gf~800gf
Electrical Life : 10,000 cycles



SCHEMATIC

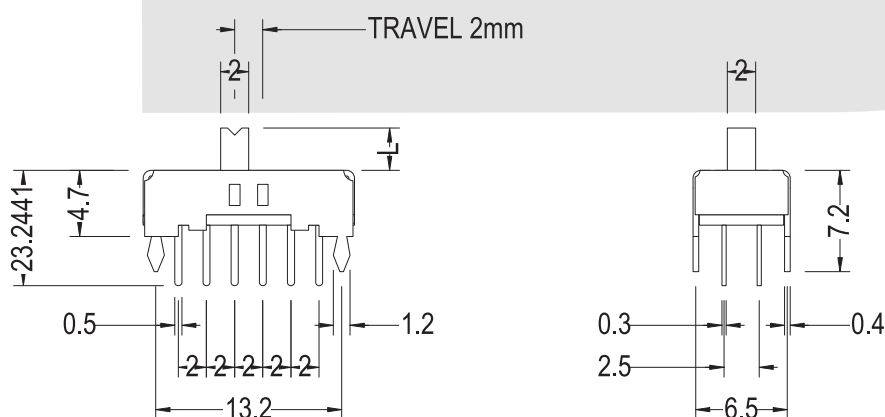

P.C.B. HOLE DETAIL



ORDER INFORMATION

KLS7-SS71 - 4 2 D 02 - X X - X

Part Number

Slide Switch Type

Pole

Throw

Operating Force

Knobe Height

Sequential No.

Travelling					
C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0

Knob Type					
RG	G	TG	VG	EG	CG


Switch

Slide Switch Series



KLS7-SS72-42H03 (4P2T) Slide Switch Series

SPECIFICATIONS


Rating: 0.5A 50VDC
Contact Resistance: 30mΩ Max
Insulation Resistance: 500VDC 100MΩ Min
Dielectric Strength: 500V AC 1 Minute
Operating Force: 100gf~800gf
Electrical Life : 10,000 cycles

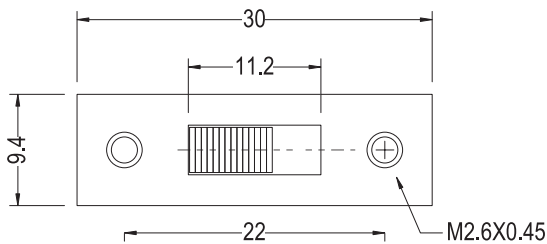

SCHEMATIC

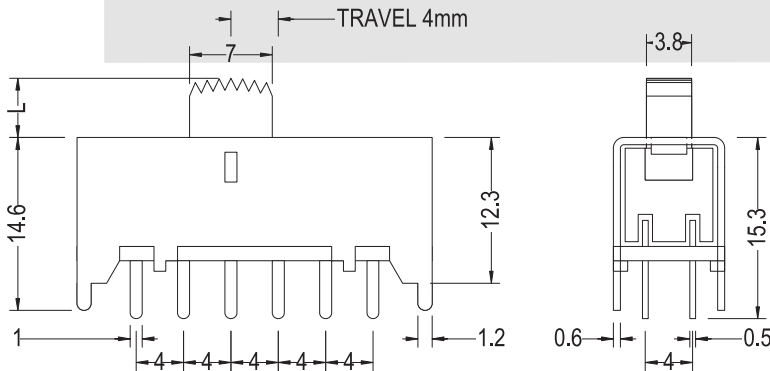

P.C.B. HOLE DETAIL



ORDER INFORMATION

KLS7-SS72 - 4 2 H 03 - X X - X

Part Number

Slide Switch Type

Pole

Throw

Operating Force

Knobe Height

Sequential No.

Travelling					
C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0

Knob Type					
RG	G	TG	VG	EG	CG


Switch

Slide Switch Series




KLS7-SS73-42H08 (4P2T) Slide Switch Series

SPECIFICATIONS


Rating: 0.3A 50VDC
Contact Resistance: 30mΩ Max
Insulation Resistance: 500VDC 100MΩ Min
Dielectric Strength: 500V AC 1 Minute
Operating Force: 100gf~800gf
Electrical Life : 10,000 cycles



SCHEMATIC

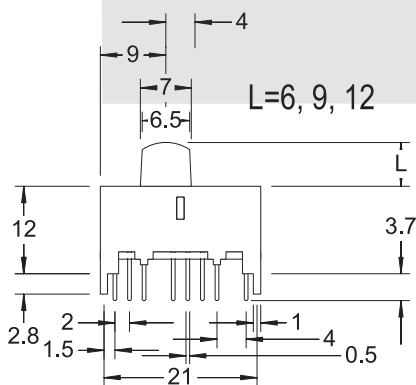

P.C.B. HOLE DETAIL



ORDER INFORMATION

KLS7-SS73 - 4 2 H 08 - X X - X

Part Number

Slide Switch Type

Pole

Throw

Operating Force

Knobe Height

Sequential No.

Travelling					
C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0

Knob Type					
RG	G	TG	VG	EG	CG



Switch

Slide Switch Series




KLS7-SK37-42D01 (4P2T) Slide Switch Series

SPECIFICATIONS


Rating: 0.3A 50VDC
Contact Resistance: 30mΩ Max
Insulation Resistance: 500VDC 100MΩ Min
Dielectric Strength: 500V AC 1 Minute
Operating Force: 100gf~800gf
Electrical Life : 10,000 cycles

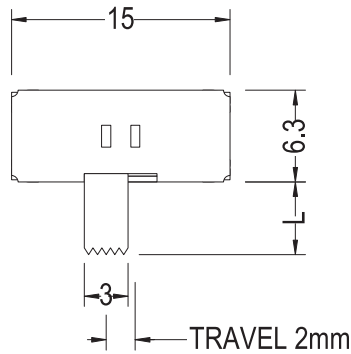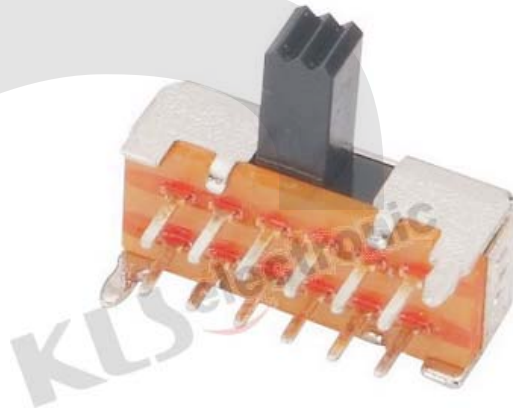

SCHEMATIC

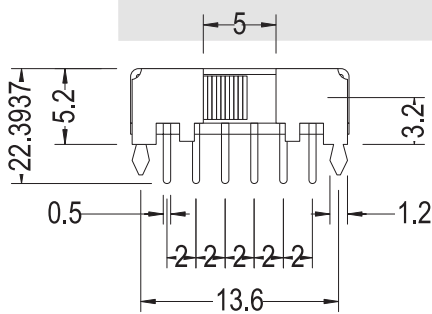

P.C.B. HOLE DETAIL



ORDER INFORMATION

KLS7-SK37 - 4 2 D 01 - X X - X

Part Number

Slide Switch Type

Pole

Throw

Operating Force

Knobe Height

Sequential No.





Travelling					
C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0

Knob Type					
RG	G	TG	VG	EG	CG

KLSelectronic
www.cnkls.com

KLS7-SK50-42H03 (4P2T) Slide Switch Series

Rating: 0.3A 50VDC
Contact Resistance: 30mΩ Max
Insulation Resistance: 500VDC 100MΩ Min
Dielectric Strength: 500V AC 1 Minute
Operating Force: 100gf~800gf
Electrical Life :10,000 cycles

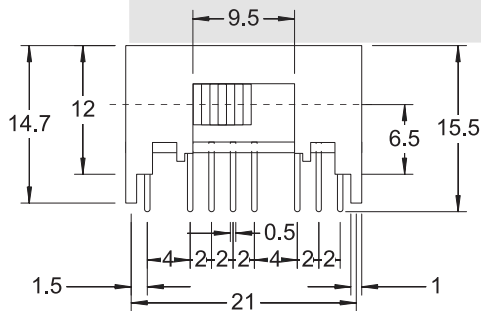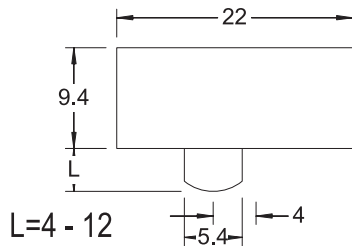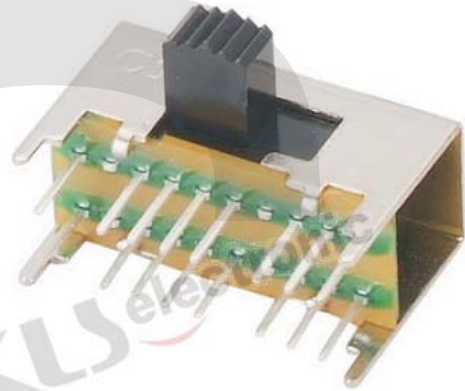

KLS7-SK50 - 4 2 H 03 - X X - X

- Sequential No.

Travelling					
C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0