

Switch

KLS electronic
www.cnkls.com



Slide Switch Series

KLS7-SS76-62H01 (6P2T) Slide Switch Series




SPECIFICATIONS

Rating: 0.5A 50VDC
Contact Resistance: 30mΩ Max
Insulation Resistance: 500VDC 100MΩ Min
Dielectric Strength: 500V AC 1 Minute
Operating Force: 100gf~800gf
Electrical Life : 10,000 cycles


VII

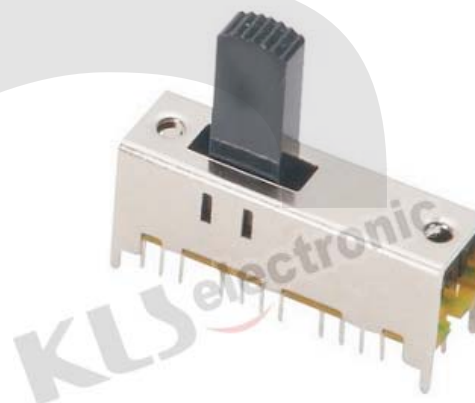

SCHEMATIC

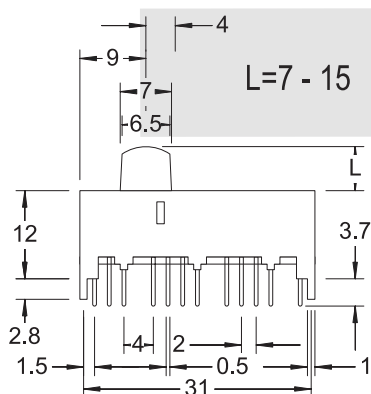

P.C.B. HOLE DETAIL

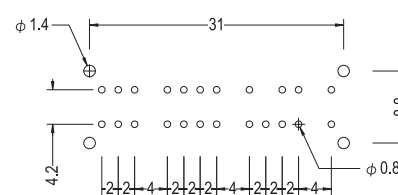

ORDER INFORMATION

KLS7-SS76 - 6 2 H 01 - X X - X

Part Number

Slide Switch Type

Pole


Throw

Operating Force

Knobe Height

Sequential No.



Travelling					
C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0

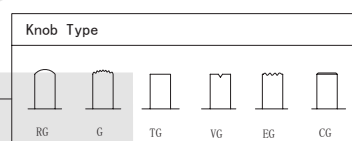



KLSelectronic
www.cnkls.com

KLS7-SK51-62H01 (6P2T) Slide Switch Series

Rating: 0.5A 50VDC
Contact Resistance: 30mΩ Max
Insulation Resistance: 500VDC 100MΩ Min
Dielectric Strength: 500V AC 1 Minute
Operating Force: 100gf~800gf
Electrical Life :10,000 cycles

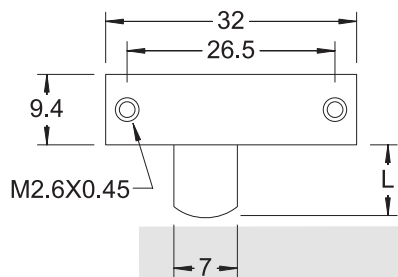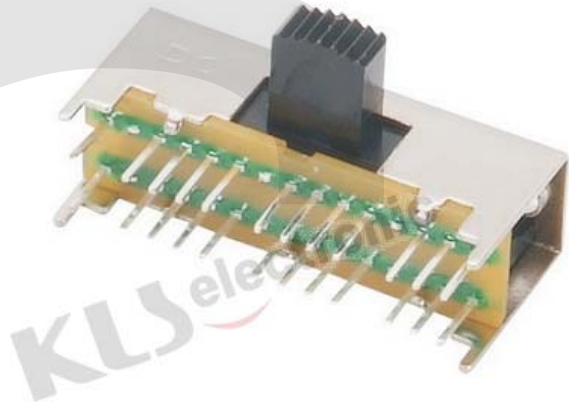

L=7 - 12

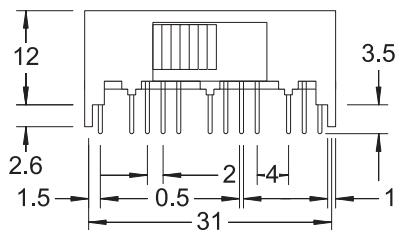

KLS7-SK51 - 6 2 H 01 - X X - X

Throw

Travelling					
C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0

- Sequential No.